



Φ3.6x10mm IEC STANDARD FUSE
RoHS Compliant & Pb-Free
GLASS TUBE MICROFUSE (TIME-LAG)
玻璃保险丝管 (慢断型)

BREAKING CAPACITY / 分断能力:

CQC / VDE / cURus:

35A OR 10In 250V AC WHICHEVER IS GREATER


TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	Max. VOLTAGE DROP (mv) 最大电压降	SAFETY APPROVALS 安全认证				REFERENCE (A²·Sec.) (RoHS) I²t 参考值
			CQC	VDE	cURus	PSE	
30T-0200H	200mA	260	●		●		0.1981
30T-0250H	250mA	240	●	●	●		0.3120
30T-0315H	315mA	220	●	●	●		0.5219
30T-0400H	400mA	200	●	●	●		0.8606
30T-0500H	500mA	190	●	●	●		1.323
30T-0630H	630mA	180	●	●	●		2.473
30T-0800H	800mA	160	●	●	●		4.165
30T-010H	1A	140	●	●	●	●	2.811
30T-013H	1.25A	130	●	●	●	●	5.300
30T-016H	1.6A	120	●	●	●	●	6.315
30T-020H	2A	100	●	●	●	●	9.668
30T-025H	2.5A	100	●	●	●	●	16.72
30T-032H	3.15A	100	●	●	●	●	28.92
30T-040H	4A	100	●	●	●	●	60.86
30T-050H	5A	100	●	●	●	●	84.99
30T-063H	6.3A	100	●	●			213.8

● DENOTES FOR APPROVED
H DENOTES FOR 250V

● 表示已取得安全认证
H 代表 250V

Dimensions/ 尺寸:

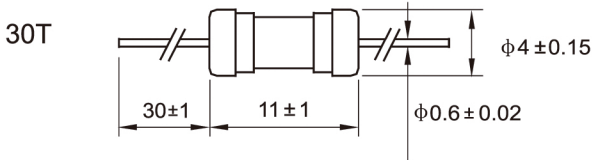

Standards/ 标准: IEC 60127 GB 9364

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.


Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s

ELECTRICAL CHARACTERISTICS/ 电气特性:

RATING 额定	BLOWING TIME 熔断时间
2.1In	Max. 最慢 2 minutes
2.75In	Min. 最快 400 ms
	Max. 最慢 10 seconds
4In	Min. 最快 150 ms
	Max. 最慢 3 seconds
10In	Min. 最快 20 ms
	Max. 最慢 150 ms

30T AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

30T 平均 I-T 曲线图 (仅供参考)

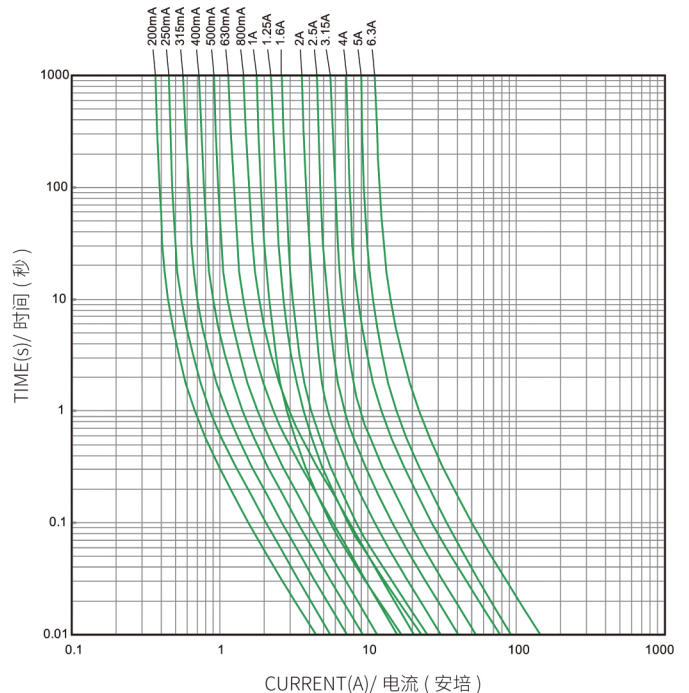

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[MBO-20](#) [MDA-V-1/100](#) [12C10X38GI](#) [AGA-V-2-1/2](#) [AGC-V-3-12-R](#) [AGY-50](#) [MSL-3](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#)
[BK1-GMA-200-R](#) [BK1GMA-6-R](#) [BK1/GMC-100-R](#) [BK1/GMC-1.5-R](#) [BK1-GMC-2-5-R](#) [BK1GMD-4-R](#) [BK1S500-250-R](#) [BK1S500-32-R](#)
[BK1-S500-4-R](#) [BK1S500-5-R](#) [BK1-S505-1-R](#) [BK1-S506-2-R](#) [BK1-S506-3-15-R](#) [BK1/S506-63-R](#) [BK/ABC-5RX](#) [BK/AGW-B-4](#) [BK/AVX-](#)
[1/4](#) [BK/C515S-250-R](#) [BK/MBO-20](#) [BK/MBO-8](#) [BK/MDM-3/4](#) [BK-MDQ-4](#) [BK/S505-V-2.5A](#) [BK/TDC120-15](#) [BK/TDC120-20](#)
[BK/TDC122-45](#) [BP/MDL-7](#) [1C10X38AM](#) [S505-V-500MA](#) [SEF-1697-1-002](#) [AGA-V-7-1/2](#) [AGC-15WX](#) [AGC-2-1-2-R](#) [20.0M6.3X32F](#)
[20C8X32GI](#) [GMC-50-R](#) [361.250](#) [MBO-8](#) [TDC121-30](#)