

2410, RoHS Compliant & Pb-Free
SMD NANO FUSE (FAST-BLOW)
方型超微表面贴片式保险丝 (速断型)

INTERRUPTING CAPACITY / 分断能力:

50A at 250V AC (200mA-10A), 50A at 125V AC/DC (12A-15A, 1A-5A), 100A at 125V AC/DC (200mA-10A), 100A at 65V DC (12A-15A), 100A at 250V AC(1A-5A)

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证						REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		CQC		UR/cUR			TUV	
		H	L1	H	L1	L2	H	
25F-0200H/L1	200mA			●	●			0.008
25F-0250H/L1	250mA			●	●			0.012
25F-0315H/L1	315mA			●	●			0.031
25F-0375H/L1	375mA			●	●			0.067
25F-0400H/L1	400mA			●	●			0.073
25F-0500H/L1	500mA			●	●			0.101
25F-0630H/L1	630mA			●	●			0.188
25F-0750H/L1	750mA			●	●			0.315
25F-0800H/L1	800mA			●	●			0.335
25F-010H/L1	1A	●	●	●	●		●	0.34
25F-012H/L1	1.2A			●	●			0.49
25F-013H/L1	1.25A	●	●	●	●		●	0.52
25F-015H/L1	1.5A			●	●			0.93
25F-016H/L1	1.6A	●	●	●	●		●	0.97
25F-020H/L1	2A	●	●	●	●		●	1.92
25F-025H/L1	2.5A	●	●	●	●		●	3.38
25F-030H/L1	3A			●	●			3.95
25F-032H/L1	3.15A	●	●	●	●		●	4.01
25F-035H/L1	3.5A			●	●			5.26
25F-040H/L1	4A	●	●	●	●		●	7.81
25F-050H/L1	5A	●	●	●	●		●	12.22
25F-063H/L1	6.3A			●	●			7.01
25F-070H/L1	7A			●	●			8.36
25F-080H/L1	8A			●	●			12.81
25F-100H/L1	10A			●	●			19.03
25F-120L1/L2	12A			●	●	●		35.62
25F-150L1/L2	15A			●	●	●		70.997


● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V H 代表 250V
L1 DENOTES FOR 125V L1 代表 125V
L2 DENOTES FOR 65V L2 代表 65V

ELECTRICAL CHARACTERISTICS/ 电气特性:


% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min. 最快 4 小时 (200mA-15A)
125%	1 hours Min. 最快 1 小时 (1A-5A)
200%	5 seconds Max. 最慢 5 秒 (200mA-10A)
	20 seconds Max. 最慢 20 秒 (12A-15A)
1000%	0.001S-0.01S (1A-5A)

Standards/ 标准: UL 248-1, UL 248-14
Operating Temperature/ 工作温度: -55°C ~125°C
Storing Temperature/ 储存温度: -55°C ~85°C
Resistance to soldering heat/ 耐焊接热性: 260°C ±5°C, 30s±5s
Solderability/ 可焊性: MIL-STD-202, Method 208

Dimensions/ 尺寸



Land Pattern:




Unit 单位: mm

PACKING/ 包装:

1,000 PIECES TAPED AND REELED IN ONE BOX
每卷 1,000 只保险丝, 装入一个包装盒


BOX SIZE/ 包装盒尺寸:

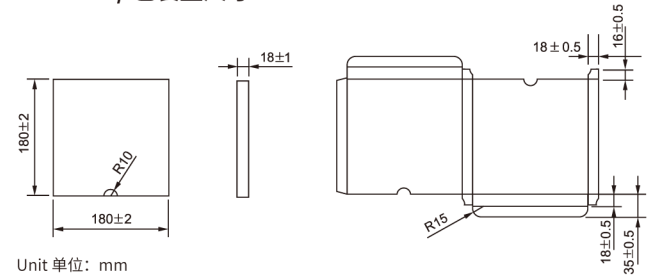

Unit 单位: mm

25F AVERAGE I-T CHARACTERISTICS CURVE

(FOR REFERENCE ONLY) 25F 平均 I-T 曲线图 (仅供参考)

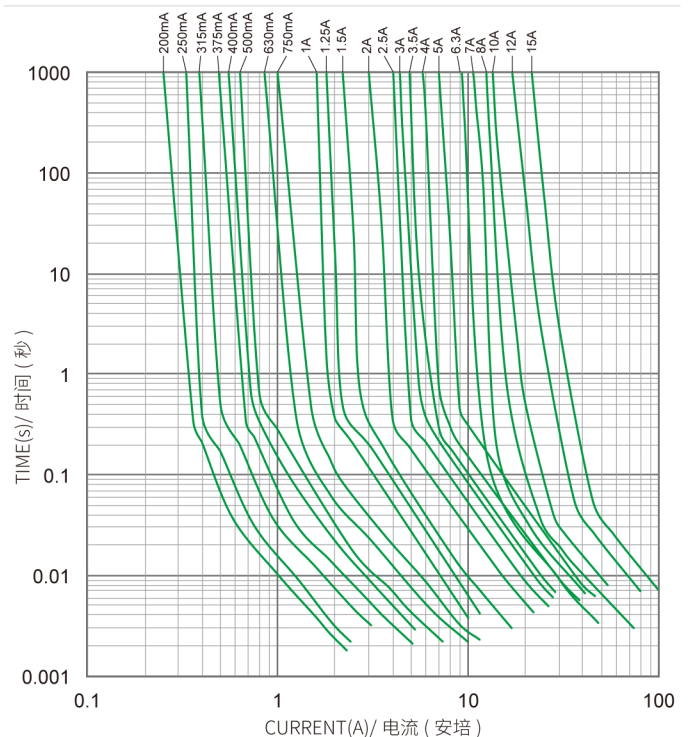

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [FT600-0500-2](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [TF16SN3.15TTD](#) [41921000000](#) [TR/3216LR-500MA](#) [CCP2B20TTE](#) [TR-3216FF4-R](#) [SST 1-1K](#) [SST 5 -1K](#) [SST 2-1K](#) [TR2-TCP500-R](#) [F60C500V12AS](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308.250UR](#) [0308.375UR](#) [0308.500UR](#) [0308.750UR](#) [0308001.UR](#) [030801.5UR](#) [FCC16202ABTP](#) [3-122-714](#) [3-122-720](#) [3-122-718](#) [3-122-712](#) [3-122-716](#) [03081.25UR](#) [CQ06LF 5A 32V](#) [CQ06LT 5A 32V](#) [SET 2A 125V \(G\)](#) [SET 1A 125V \(G\)](#) [SEF 10A 125V \(G\)](#) [SEF 3A 125V \(G\)](#) [SEF 4A 125V \(G\)](#) [SEF 6A 125V \(G\)](#) [SEF 7A 125V \(G\)](#) [SET 4A 125V \(G\)](#) [SET 3A 125V \(G\)](#) [SET 5A 125V \(G\)](#) [SET 7A 125V \(G\)](#) [F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#) [SKY87604-13](#) [0154002.DRL](#) [0154008.DRL](#)