



2410, RoHS Compliant & Pb-Free SMD NANO FUSE (SLOW-BLOW) 方型超微表面贴片式保险丝 (慢断型)

INTERRUPTING CAPACITY / 分断能力:

50A at 250V AC (200mA-5A)

100A at 125V DC/AC (200mA-5A)

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		UR/cUR	
25T-0200H/L	200mA	●	0.06
25T-0250H/L	250mA	●	0.08
25T-0315H/L	315mA	●	0.130
25T-0375H/L	375mA	●	0.186
25T-0400H/L	400mA	●	0.210
25T-0500H/L	500mA	●	0.329
25T-0630H/L	630mA	●	0.532
25T-0750H/L	750mA	●	0.845
25T-0800H/L	800mA	●	1.16
25T-010H/L	1A	●	1.88
25T-012H/L	1.2A	●	3.10
25T-013H/L	1.25A	●	3.56
25T-015H/L	1.5A	●	4.49
25T-016H/L	1.6A	●	4.98
25T-020H/L	2A	●	5.18
25T-025H/L	2.5A	●	10.66
25T-030H/L	3A	●	14.01
25T-032H/L	3.15A	●	15.04
25T-035H/L	3.5A	●	15.51
25T-040H/L	4A	●	24.22
25T-050H/L	5A	●	32.39

● DENOTES FOR APPROVED

● 表示已取得安全认证

H DENOTES FOR 250V

L DENOTES FOR 125V

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	1-60 seconds	1-60 秒
300%	0.2-3 seconds	0.2-3 秒
800%	0.01-0.1 seconds	0.01-0.1 秒

Standards/ 标准: UL 248-1, UL 248-14


Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C


Resistance to soldering heat/ 耐焊接热性: 260°C ±5°C, 30s±5s

Solderability/ 可焊性: MIL-STD-202, Method 208

Dimensions/ 尺寸

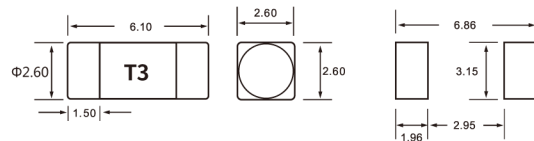

Land Pattern:




Unit 单位: mm

PACKING/ 包装:

1,000 PIECES TAPED AND REELED IN ONE BOX

每卷 1,000 只保险丝, 装入一个包装盒

BOX SIZE/ 包装盒尺寸:

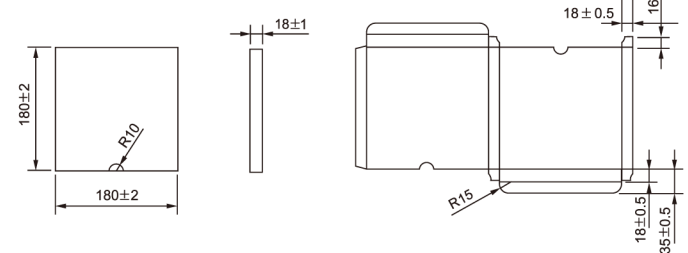


Unit 单位: mm

25T AVERAGE I-T CHARACTERISTICS CURVE

(FOR REFERENCE ONLY)

25T 平均 I-T 曲线图 (仅供参考)

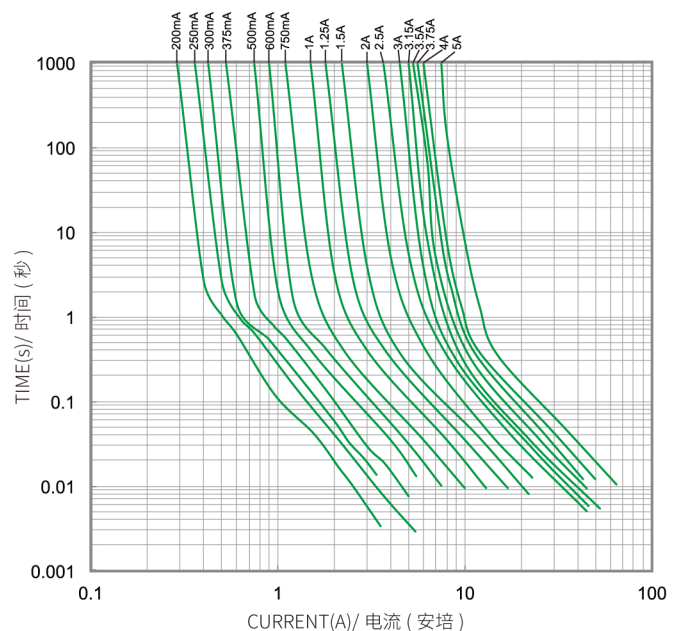

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [FT600-0500-2](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [TF16SN3.15TTD](#) [41921000000](#) [TR/3216LR-500MA](#) [CCP2B20TTE](#) [TR-3216FF4-R](#) [SST 1-1K](#) [SST 5 -1K](#) [SST 2-1K](#) [TR2-TCP500-R](#) [F60C500V12AS](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308.250UR](#) [0308.375UR](#) [0308.500UR](#) [0308.750UR](#) [0308001.UR](#) [030801.5UR](#) [FCC16202ABTP](#) [3-122-714](#) [3-122-720](#) [3-122-718](#) [3-122-712](#) [3-122-716](#) [03081.25UR](#) [CQ06LF 5A 32V](#) [CQ06LT 5A 32V](#) [SET 2A 125V \(G\)](#) [SET 1A 125V \(G\)](#) [SEF 10A 125V \(G\)](#) [SEF 3A 125V \(G\)](#) [SEF 4A 125V \(G\)](#) [SEF 6A 125V \(G\)](#) [SEF 7A 125V \(G\)](#) [SET 4A 125V \(G\)](#) [SET 3A 125V \(G\)](#) [SET 5A 125V \(G\)](#) [SET 7A 125V \(G\)](#) [F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#) [SKY87604-13](#) [0154002.DRL](#) [0154008.DRL](#)