

0603, RoHS Compliant & Pb-Free SURFACE MOUNT CHIP FUSE (FAST-BLOW) 表面贴装片式保险丝 (速断型)

INTERRUPTING CAPACITY / 分断能力:

50A 32V AC (200mA-1A) 35A 32V AC (1.2A-5A)
50A 63V DC (200mA-250mA) 50A 32V DC (300mA-1A)
35A 32V DC (1.2A-5A)

TECHNICAL PARAMETERS/ 技术参数:

| CATALOG NO. 目录编号 | CURRENT RATING 额定电流 | SAFETY APPROVALS 安全认证 | | | | REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值 |
|---------------------|------------------------|--------------------------|----|-----|----|---|
| | | UR | | cUR | | |
| | | L1 | L2 | L1 | L2 | |
| 06F-0200L | 200mA | ● | ● | ● | ● | 0.00056 |
| 06F-0250L | 250mA | ● | ● | ● | ● | 0.00078 |
| 06F-0315L | 315mA | ● | | ● | | 0.00083 |
| 06F-0375L | 375mA | ● | | ● | | 0.00115 |
| 06F-0400L | 400mA | ● | | ● | | 0.00135 |
| 06F-0500L | 500mA | ● | | ● | | 0.0069 |
| 06F-0630L | 630mA | ● | | ● | | 0.0072 |
| 06F-0750L | 750mA | ● | | ● | | 0.017 |
| 06F-0800L | 800mA | ● | | ● | | 0.019 |
| 06F-010L | 1A | ● | | ● | | 0.041 |
| 06F-012L | 1.2A | ● | | ● | | 0.043 |
| 06F-013L | 1.25A | ● | | ● | | 0.045 |
| 06F-015L | 1.5A | ● | | ● | | 0.078 |
| 06F-016L | 1.6A | ● | | ● | | 0.076 |
| 06F-020L | 2A | ● | | ● | | 0.130 |
| 06F-025L | 2.5A | ● | | ● | | 0.180 |
| 06F-030L | 3.0A | ● | | ● | | 0.280 |
| 06F-032L | 3.15A | ● | | ● | | 0.32 |
| 06F-035L | 3.5A | ● | | ● | | 0.361 |
| 06F-040L | 4A | ● | | ● | | 0.408 |
| 06F-050L | 5A | ● | | ● | | 1.100 |


● DENOTES FOR APPROVED ● 表示已取得安全认证
L1 DENOTES FOR 32V L1 代表 32V
L2 DENOTES FOR 63V L2 代表 63V

ELECTRICAL CHARACTERISTICS/ 电气特性:

| % of CURRENT RATING 额定电流的 % | BLOWING TIME 熔断时间 |
|--------------------------------|------------------------------------|
| 100% | 4 hours Min. 最快 4 小时 |
| 250% | 10 seconds Max. 最慢 10 秒 (200mA-3A) |
| 350% | 1 second Max. 最慢 1 秒 (3.15A-5A) |

Standards/ 标准: UL 248-1, UL 248-14
Operating Temperature/ 工作温度: -55°C ~90°C
Storing Temperature/ 储存温度: -55°C ~85°C
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.
Solderability/ 可焊性: 235°C ±5°C, 3.5s±0.5/-0s


Dimensions/ 尺寸:

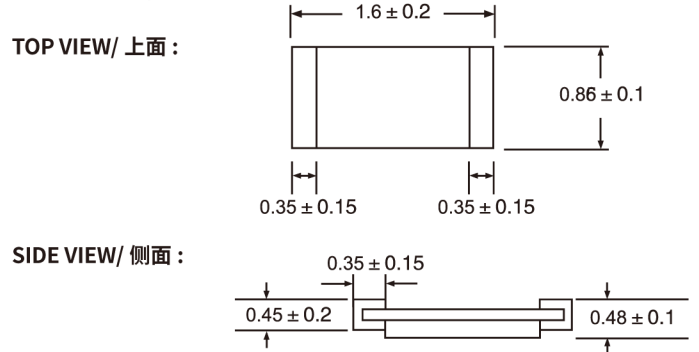

PACKING/ 包装:


5,000 PIECES TAPED AND REELED IN ONE BOX
每卷 5,000 只保险丝, 装入一个包装盒

BOX SIZE/ 包装盒尺寸:

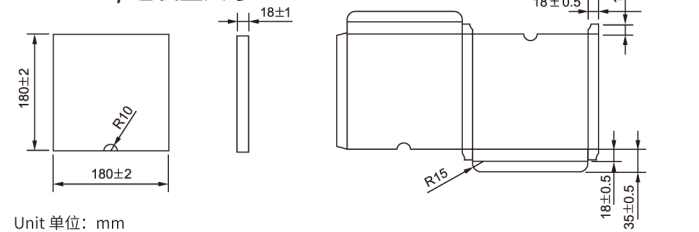

06F AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

06F 平均 I-T 曲线图 (仅供参考)

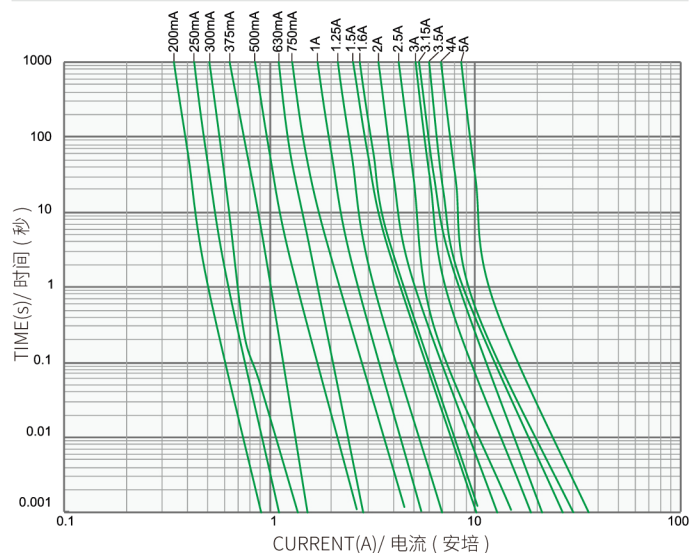

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [FT600-0500-2](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [TF16SN3.15TTD](#) [41921000000](#) [TR/3216LR-500MA](#) [CCP2B20TTE](#) [TR-3216FF4-R](#) [SST 1-1K](#) [SST 5 -1K](#) [SST 2-1K](#) [TR2-TCP500-R](#) [F60C500V12AS](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308.250UR](#) [0308.375UR](#) [0308.500UR](#) [0308.750UR](#) [0308001.UR](#) [030801.5UR](#) [FCC16202ABTP](#) [3-122-714](#) [3-122-720](#) [3-122-718](#) [3-122-712](#) [3-122-716](#) [03081.25UR](#) [CQ06LF 5A 32V](#) [CQ06LT 5A 32V](#) [SET 2A 125V \(G\)](#) [SET 1A 125V \(G\)](#) [SEF 10A 125V \(G\)](#) [SEF 3A 125V \(G\)](#) [SEF 4A 125V \(G\)](#) [SEF 6A 125V \(G\)](#) [SEF 7A 125V \(G\)](#) [SET 4A 125V \(G\)](#) [SET 3A 125V \(G\)](#) [SET 5A 125V \(G\)](#) [SET 7A 125V \(G\)](#) [F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#) [SKY87604-13](#) [0154002.DRL](#) [0154008.DRL](#)