

Material:  
 Insulator: PBT+30% Glass Fiber (UL94V-0).  
 Contact: Copper Alloy.  
 Contact Plated: Gold or Tin over Nickel Plated.  
 Specification:  
 Current Rating: 1 Amp.  
 Withstanding Voltage: AC 500V for 1 Minute.  
 Insulation Resistance: 1000MΩ Min. at DC 500V.  
 Contact Resistance: 15mΩ Max.  
 Operating Temperature: -40°C ~ +105°C.

**Contact Material: Brass**

Pos.	Dim. A	Dim. B	Dim. C	Dim. D
10	10.16	18.15	22.95	11.43
14	15.24	22.94	28.03	16.51
16	17.78	25.48	30.57	19.05
20	22.86	30.56	35.65	24.13
24	27.94	35.64	40.73	29.21
26	30.48	38.18	43.27	31.75
30	35.56	43.26	48.35	36.83
34	40.64	48.34	53.43	41.91
40	48.26	55.96	61.05	49.53
50	60.96	68.66	73.75	62.23
60	73.66	81.36	86.45	74.93
64	78.74	86.44	91.53	80.01


TOLERANCE TABLE

.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:	DATE:	<b>C</b> 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRY CO., LTD
CHECKED:	DATE:	
DRAWN:	DATE:	TITLE: 300F-XP 压线式 无耳 灰白色
SXA	2019-04-27	CLIENT P/N: B-3000FXXP-0800
		UNIT: mm SCALE: free
		FILE NO: Chantw-300-0009
		REV.
		Q700

**深圳市灿科盟实业有限公司**  
**SHENZHEN CHANKEMENG INDUSTRY CO., LTD**

**IDC编码规则**

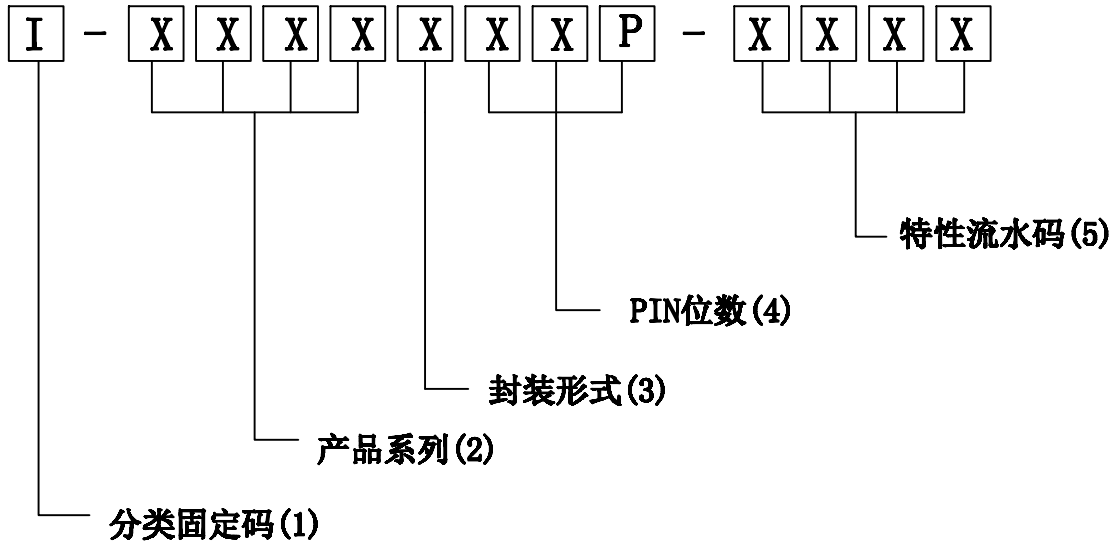

**说明:**

- (1). 此位数为分类固定码“I”-IDC连接器
- (2). 此数为产品系列,

编码	品名	规格描述
1010	101	FC/2.54mm
1011	101-1	FC/1.27mm
1012	101-2	FC/2.0mm
6030	603	FD/2.54mm
6032	603-2	FD/2.0mm

编码	品名	规格描述
300F	300F	筒牛IDC/2.54mm
310F	310F	牛角IDC/2.54mm

- (3). PIN位数  
按实际PIN数编码, 100用“A0”  
如: 100位, 编码为“A0P”

- (5). 特性流水码  
在规格/描述中, 按步骤指定:  
a) 结构尺寸特性  
b) 塑胶材料特性  
c) 五金材料特性  
d) 其它特定要求

- (4). 封装形式:

1	反折扣 (单件)
2	二件式
3	三件式

批 准: \_\_\_\_\_ 审 核: \_\_\_\_\_ 制 定: 龙永峰

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Cankemeng](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)