

SEMF3V3LC

Low Capacitance Quad Array for ESD Protection Description

Revision:A

General Description

This integrated transient voltage suppressor device (TVS) is designed for applications requiring transient overvoltage protection, printers, business machines, communication systems, medical equipment, and other applications. Its integrated design provides very effective and reliable protection for separate lines using only one package. These devices are ideal for situations where board space is at a premium.

Applications

- Serial and Parallel Ports
- Microprocessor Based Equipment
- Notebooks, Desktops, Servers
- Cellular and Portable Equipment

Features

- Four Separate Unidirectional Configurations for Protection
- Low Leakage Current < 1 μ A @ 3Volts
- Power Dissipation: 380mW
- Small SOT-353 SMT Package
- Low Capacitance
- Complies to USB 1.1 Low Speed & Speed Specifications
- These are Pb-Free Devices

Complies with the following standards

IEC61000-4-2

Level 4 15 kV (air discharge)

8 kV(contact discharge)


MIL STD 883E - Method 3015-7 Class 3

25 KV HBM (Human Body Model)

Functional diagram



SOT-353

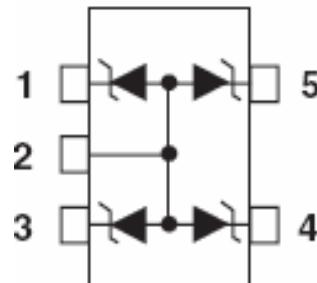


Maximum Ratings ($T_A=25^\circ\text{C}$)

Symbol	Parameter	Value	Units
P_{PK}	Peak Power Dissipation($8 \times 20 \mu\text{s}$ @ $T_A=25^\circ\text{C}$)	30	W
P_D	Steady State Power-1 Diode	380	mW
R_{JA}	Thermal Resistance, Junction-to-Ambient Above 25°C, Derate	327 3.05	°C/W Mw/°C
T_{Jmax}	Maximum Junction Temperature	150	°C
$T_J T_{stg}$	Operation Junction and Storage Temperature Range	-55 to +150	°C
T_L	Lead Solder Temperature(10 seconds duration)	260	°C

Electrical Parameter

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
I_T	Test Current
V_{BR}	Breakdown Voltage @ I_T
I_F	Forward Current
V_F	Forward Voltage @ I_F

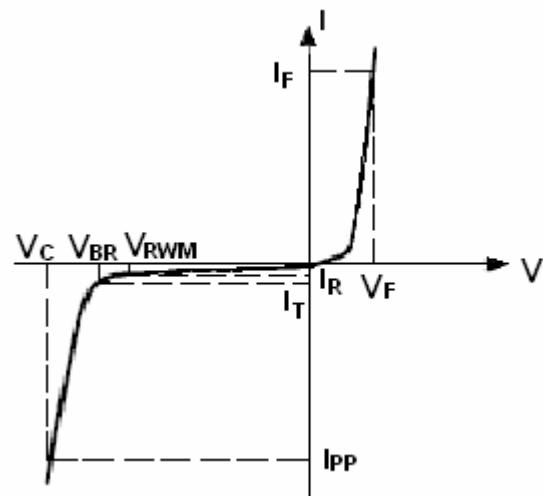

Electrical Characteristics

Part Numbers	V_{BR}			I_T	V_{RWM}	I_R	V_F	I_F	C
	Min.	Typ.	Max.				mA	V	pF
	V	V	V						
MSEMF3V3LC	5.3	5.6	5.88	1	3.3	1.0	1.25	200	28

1. Non-repetitive current per Figure 1.
2. Only 1 diode under power. For 4 diodes under power
3. Capacitance of one diode at $f=1\text{MHz}, T_A=25^\circ\text{C}$

Typical Characteristics

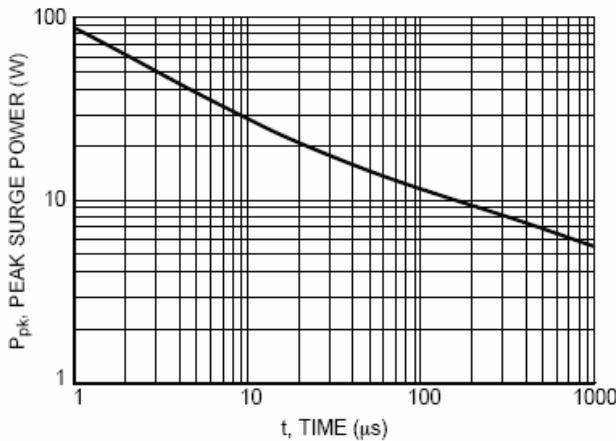


Figure 1 Pulse Width

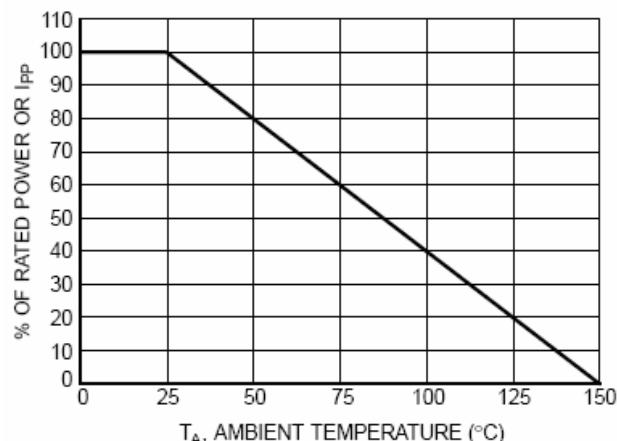


Figure 2 Power Derating Curve

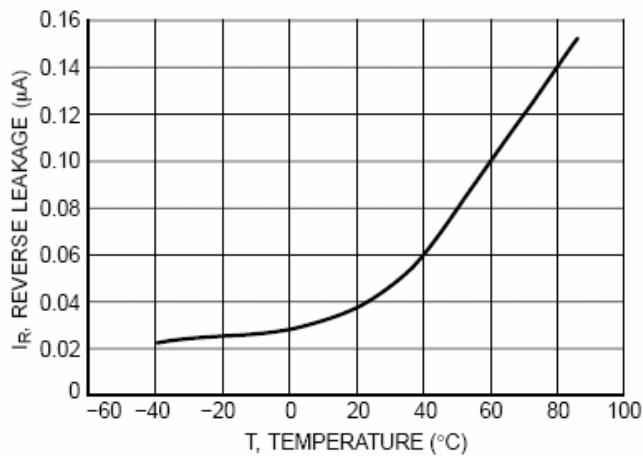


Figure 3 Reverse Leakage versus temperature

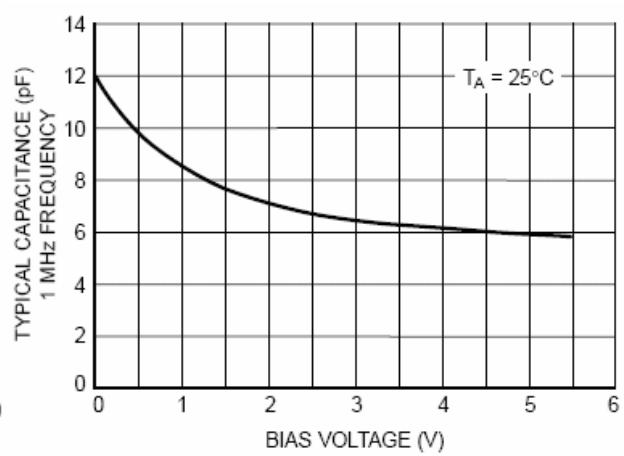


Figure 4 Capacitance

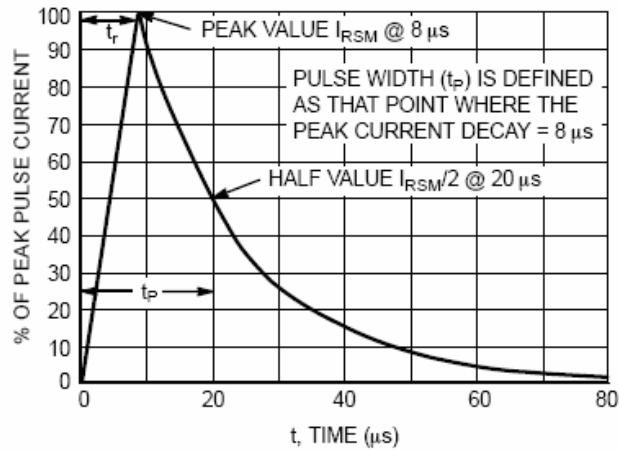


Figure 5 8*20 Pulse Waveform

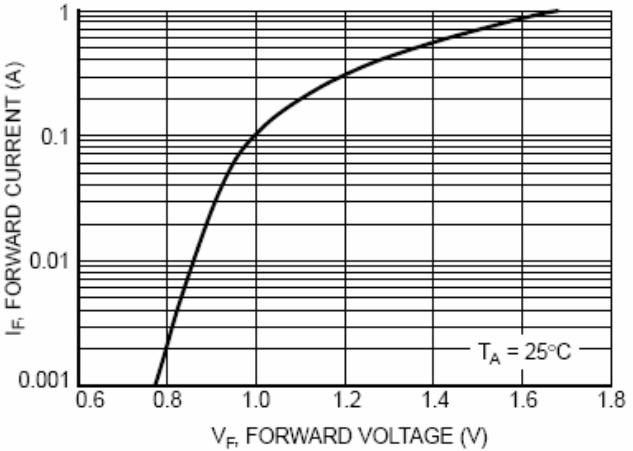


Figure 6 Forward Voltage

SOT-353 Mechanical Data

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.8	1.1	0.031	0.043
A1	0	0.1	0	0.004
A2	0.8	1	0.031	0.039
b	0.15	0.3	0.006	0.012
c	0.1	0.18	0.004	0.007
D	1.8	2.2	0.071	0.086
E	1.15	1.35	0.045	0.053
e	0.65 Typ.		0.025 Typ.	
H	1.8	2.4	0.071	0.094
Q1	0.1	0.4	0.004	0.016

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.8	1.1	0.031	0.043
A1	0	0.1	0	0.004
A2	0.8	1	0.031	0.039
b	0.15	0.3	0.006	0.012
c	0.1	0.18	0.004	0.007
D	1.8	2.2	0.071	0.086
E	1.15	1.35	0.045	0.053
e	0.65 Typ.		0.025 Typ.	
H	1.8	2.4	0.071	0.094
Q1	0.1	0.4	0.004	0.016

The SINO-IC logo is a registered trademark of Shanghai Sino-IC Microelectronics Co., Ltd.
© 2005 SINO-IC – Printed in China – All rights reserved.

SHANGHAI SINO-IC MICROELECTRONICS CO., LTD

Add: Building 3, Room 3401-03, No.200 Zhangheng Road, ZhangJiang Hi-Tech Park, Pudong,
Shanghai 201203, China

Phone: +86-21-33932402 33932403 33932405 33933508 33933608

Fax: +86-21-33932401

Email: webmaster@sino-ic.com

Website: <http://www.sino-ic.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by SINO-IC manufacturer:

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-TP](#)
[MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)