

SPECIFICATION:

Current Rating: 3.0AMP
 Contact Resistance: 20m Ω (max)
 Insulation Resistance: 1000M Ω Min at 500V DC
 Dielectric Strength: 500V AC Per 1 Minute
 Operating Temperature: -40 °C TO +105 °C

MATERIALS:

Insulator: P.B.T.+30% Glass Fibre(UL 94V-0)
 Contact: Brass
 Contact plated: 0.8u" Gold Over Nickel

Poles	Part No.	Dimension mm		
		A	B	C
10	310R-10P	31.90	10.16	18.60
12	310R-12P	34.44	12.70	21.14
14	310R-14P	36.98	15.24	23.68
16	310R-16P	39.52	17.78	26.22
20	310R-20P	44.60	22.86	31.30
24	310R-24P	49.68	27.94	36.38
26	310R-26P	52.22	30.48	38.92
30	310R-30P	57.30	35.56	44.00
34	310R-34P	62.38	40.64	49.08
40	310R-40P	70.10	48.26	56.70
50	310R-50P	82.70	60.96	69.40
60	310R-60P	95.40	73.66	82.10
64	310R-64P	100.48	78.74	87.18


TOLERANCE TABLE

.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:	DATE:	TITLE:	CLIENT P/N	UNIT	SCALE	REV.
CHECKED:	DATE:	310R-XP	/	mm	Free	A
DRAWN:	DATE:	深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRY CO., LTD				
LYP	2008-04-07	FILE NO. Chantw-310-00003				

深圳市灿科盟实业有限公司
SHENZHEN CHANKEMENG INDUSTRY CO., LTD

筒牛、牛角成品编码规则

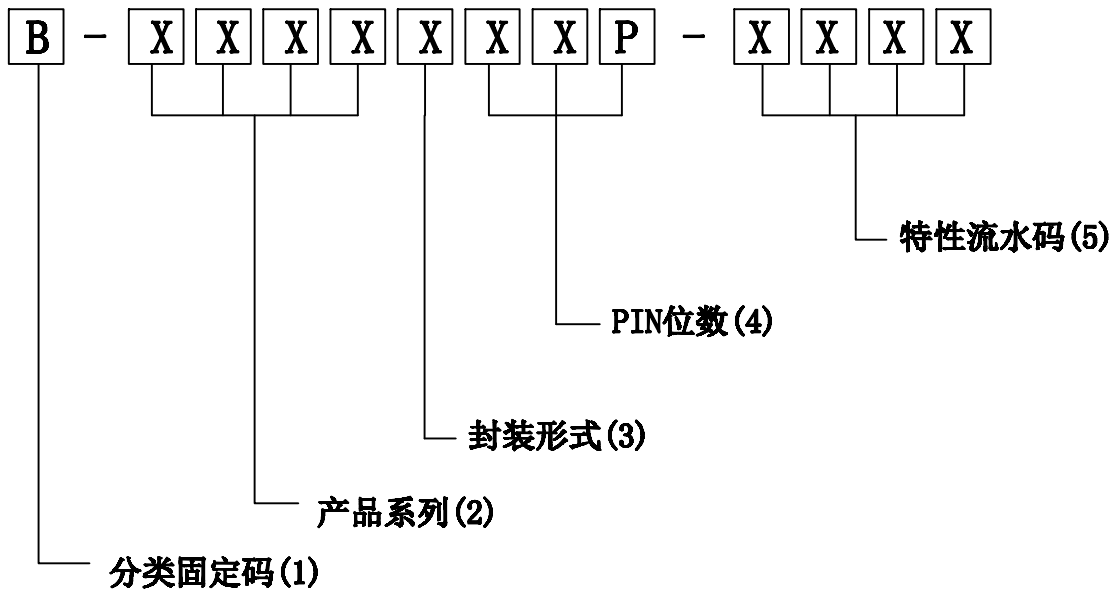

说明:

- (1). 此位数为分类固定码“B”-连接器
- (2). 此数为产品系列,

编码	品名	规格描述
3000	300	筒牛/2.54mm
3001	300-1	筒牛/1.27mm
3002	220-2	筒牛/2.0mm

编码	品名	规格描述
3100	310	牛角/2.54mm
3101	310-1	牛角/1.27mm
3102	310-2	牛角/2.0mm

- (3). 封装形式:

S	直插
R	弯插
M	卧贴
N	立贴

- (4). PIN位数

按实际PIN数编码, 100用“A0”

如: 100位, 编码为“A0P”

- (5). 特性流水码

在规格/描述中, 按步骤指定:

- a) 结构尺寸特性
- b) 塑胶材料特性(颜色+材质)
- c) 五金材料特性(材质+镀层)
- d) 其它特定要求

批 准: _____

审 核: _____

制 定: 龙永峰

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Cankemeng](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)