


- ◇ Fast Switching Speed
- ◇ For General Purpose Switching Applications
- ◇ High Conductance
- ◇ Low Current Leakage
- ◇ Small Outline Surface Mount Package
- ◇ RoHS compliant / Green EMC

Device Marking Code	
BAS16	A6

SOT23

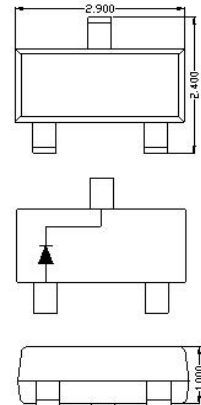

MAXIMUM RATINGS (Ta = 25 °C)

Symbol	Parameter	Value	Units
V _R	Reverse Voltage	75	V
V _{RM}	Peak Reverse Voltage	100	V
I _O	Average Rectified Current	150	mA
P _{tot}	Power Dissipation	250	mW
T _J	Junction Temperature	150	°C
I _{FSM}	NON-Repetitive Peak Forward Surge Current (@t=1S.)	1	A
I _F	Peak Forward Current	300	mA
T _{stg}	Storage Temperature	-55 to 155	°C
R _{th}	Thermal Resistance	555	°C/W

ELECTRICAL CHARACTERISTICS (Ta = 25 °C)


Symbol	Parameter	Test Conditions	Min	Max	Units
V _F	Forward Voltage	I _F =150mA		1.25	V
V _R	Reverse breakdown voltage	I _R =100uA	75		V
I _R	Reverse voltage leakage current	V _R =75V		1	uA
C _J	Typical Junction Capacitance	V _R =0V, f=1.0MHz		2	pF
T _{rr}	Reverse recovery time	I _F =10mA, V _R =6V R _L =100Ω		4	nS

ORDERING INFORMATION

Device	Package	Shipping	Tape wide	Emboss pitch	Tape specification	Notes
BAS16	SOT23	Tape & Reel 3000pcs /7" Reel	8mm	4mm	Conductive	

PACKAGE DIMENSIONS

Package Outline : SOT23

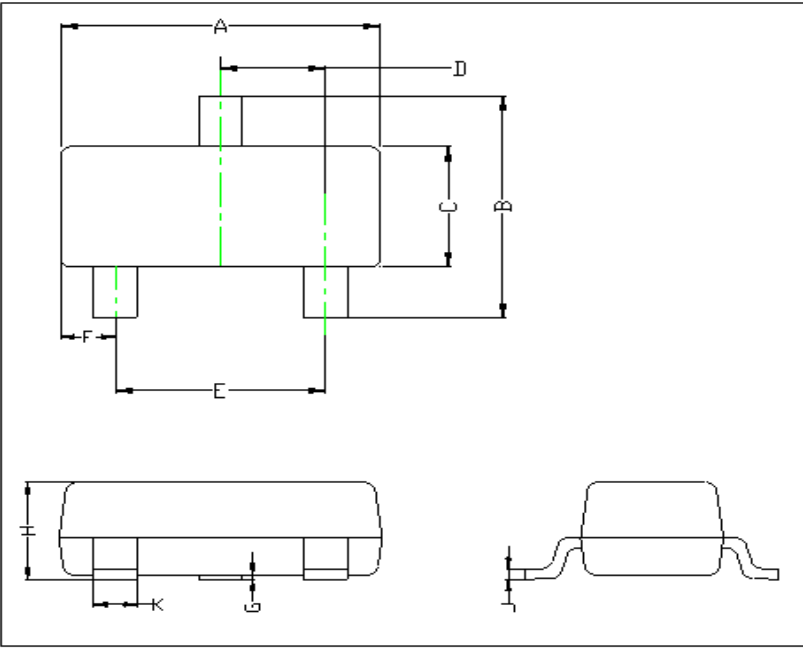

Symbol	Dimensions in mm	
	Min.	Max.
A	2.800	3.040
B	2.100	2.640
C	1.200	1.400
D	0.890	1.030
E	1.780	2.050
F	0.450	0.600
G	0.013	0.100
H	0.900	1.110
J	0.090	0.180
K	0.370	0.510

Note:

1. Halogen free ,EMC
2. Pb free solder
- 3: Lead thickness solder plating
4. Lead frame CAC-5
5. Other Tolerance ± 0.05
6. Dimensions are exclusive of Burrs Mold Flash and Tie Bar extrusions
7. Unit :mm

SOT23 Package Outline

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [Yenji manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RD0506LS-SB-1H](#) [RGP30G-E373](#) [DSE010-TR-E](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [HSC285TRF-E](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMD7000LT3G](#) [FC903-TR-E](#) [1N4449](#) [1N4934-E3/73](#) [1SS226-TP](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)