

MATERIAL
 Insulator: NY6T UL94-V0
 Contact Pin : Brass





SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000M Ω Min. at DC 500V
 Contact Resistance : 20m Ω Max. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

210-9 2- 03 G B 01
 1 2 3 4 5 6

- 1. 7: Green Product
- 2. 9: Green Product High Temp
- 2. 1: Single row
- 2. 2: Dual rows
- 3. No. of contacts per row
- 4. G: Gold flash
- S: Selective
- T: Tin plated
- 5. B: Black Insulator
- W: White Insulator
- 6. Pinrex internal code.

Recommended P.C.B Layout

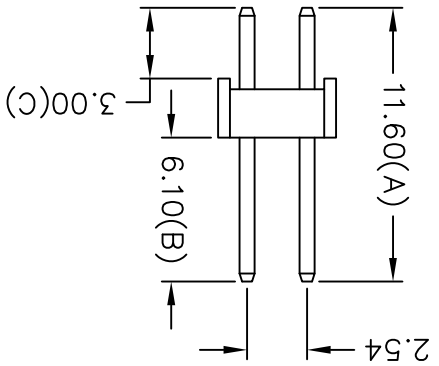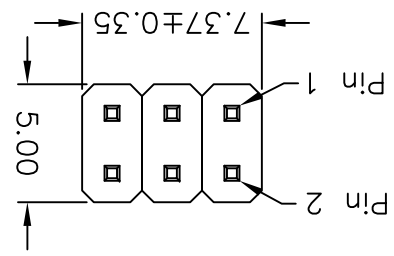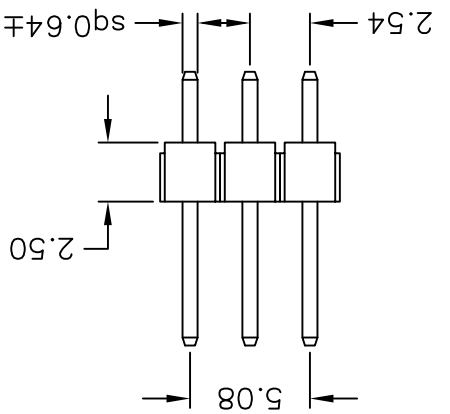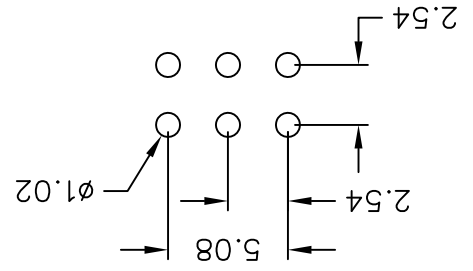

REV.	DESCRIPTION	DATE	ANG. = ±3. 0.000 = ±. .000 = ±.XXX	TOLERANCE	0 = ±.30 .00 = ±.20 .000 = ±.XXX	SCALE	NONE	SIZE	A4	1 OF 1	SHEET	REV.	AP'D	NEW PART NO.	DRAW NO.
A	RELEASE	2005/04/25												210-92-03GB01	210-92-03GB01(D板)
B	REVISE DIMENSIONS	2007/09/27													
C	REVISE HOUSING SIZE	2011/07/21													
D	增加防焊層	2018/06/11													

PINREX TECHNOLOGY CORP.
 频锐科技股份有限公司

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Pinrex](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)