
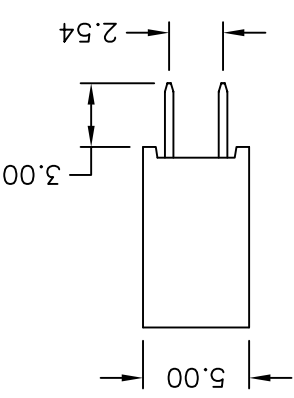
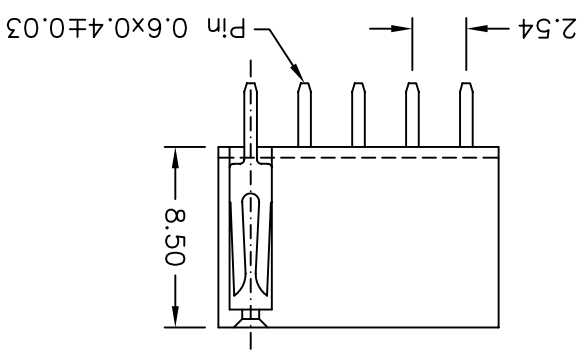
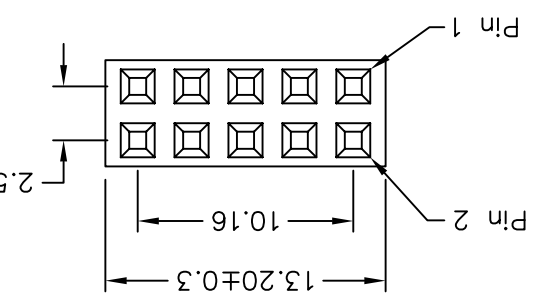


REV. A	RELEASE	DESCRIPTION	DATE	ANG. ±.3°	TOLERANCE	0.0 ±.30 ±.20 ±.00 ±.XXX 0.000 ±.000	SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	AP'D	NEW PART NO. 610-92-05GB00	DRAW NO. 610-92-05GB00
			2006/11/22									OLD PART NO. PS1S84-205GB	PINREX TECHNOLOGY CORP.
												FEMALE HEADER 2.54*2.54mm	
												HEIGHT 8.5mm	
												STRAIGHT TYPE, DUAL ROWS	

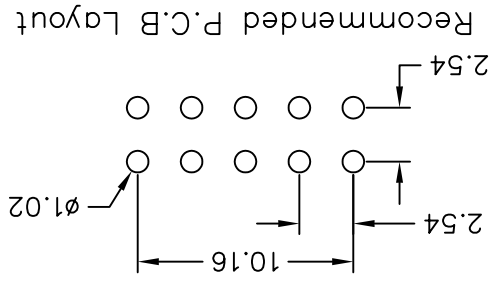


Recommended P.C.B Layout

- 610-92-05GB00
1. 5: Normal parts (30% Glass fiber PBT)
 - 7: Green Product (30% Glass fiber PBT)
 - 9: Green Product High Temp (NYLON 6T or 9T)
 2. 1: Single row
 - 2: Dual rows
 3. No. of contacts per row
 4. G: Gold flash
 - T: Tin plated
 5. B: Black Insulator
 6. Pinrex internal code.

MATERIAL
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin.
 Contact Resistance : 20mΩMax.
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C



FEMALE HEADER 2.54*2.54mm
 STRAIGHT TYPE, DUAL ROWS
 HEIGHT 8.5mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Pinrex](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)