



**VOLTAGE RANGE: 5.1- 200V**  
**POWER: 2.0Watts**

### Features

- Complete Voltage Range 5.1 to 200 Volts
- High peak reverse power dissipation
- High reliability
- Low leakage current

### Mechanical Data

- Case : DO-41 Molded plastic
- Epoxy : UL94V-O rate flame retardant
- Lead : Axial lead solderable per MIL-STD-202, method 208 guaranteed
- Polarity : Color band denotes cathode end
- Mounting position : Any
- Weight : 0.339 gram

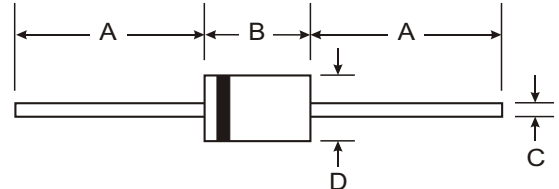

| DO-41                |      |       |
|----------------------|------|-------|
| Dim                  | Min  | Max   |
| A                    | 26.5 | —     |
| B                    | 5.06 | 5.21  |
| C                    | 0.71 | 0.864 |
| D                    | 2.62 | 2.72  |
| All Dimensions in mm |      |       |



### Maximum Ratings and Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load.

| Rating                                                     | Symbol          | Value         | Unit             |
|------------------------------------------------------------|-----------------|---------------|------------------|
| DC Power Dissipation at $T_L = 75^\circ\text{C}$ (Note1)   | $P_D$           | 2.0           | Watts            |
| Maximum Forward Voltage at $I_F = 200\text{ mA}$           | $V_F$           | 1.2           | Volts            |
| Maximum Thermal Resistance Junction to Ambient Air (Note2) | $R_{\theta JA}$ | 60            | K / W            |
| Junction Temperature Range                                 | $T_J$           | - 55 to + 175 | $^\circ\text{C}$ |
| Storage Temperature Range                                  | $T_s$           | - 55 to + 175 | $^\circ\text{C}$ |

**Note :**

- (1)  $T_L$  = Lead temperature at 3/8 " (9.5mm) from body
- (2) Valid provided that leads are kept at ambient temperature at a distance of 10 mm from case.

**Fig. 1 POWER TEMPERATURE DERATING CURVE**

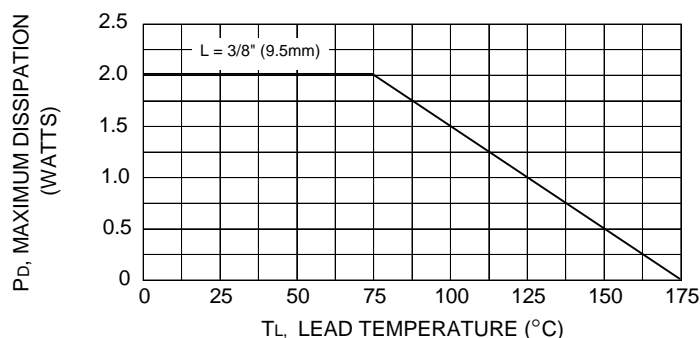



## ELECTRICAL CHARACTERISTICS Rating at = 25 °C ambient temperature unless otherwise specified

| TYPE     | Nominal Zener Voltage |      | Maximum Zener Impedance |           |      | Maximum Reverse Leakage Current |       | Maximum DC Zener Current |
|----------|-----------------------|------|-------------------------|-----------|------|---------------------------------|-------|--------------------------|
|          | Vz @ IzT              | IzT  | ZzT @ IzT               | Zzk @ Izk | Izk  | IR @ VR                         |       | IzM                      |
|          | (V)                   | (mA) | (Ω)                     | (Ω)       | (mA) | (μA)                            | (V)   | (mA)                     |
| 2EZ5.1D5 | 5.1                   | 98.0 | 3.5                     | 600       | 1.0  | 5.0                             | 1.0   | 356                      |
| 2EZ5.6D5 | 5.6                   | 89.5 | 2.5                     | 500       | 1.0  | 5.0                             | 2.0   | 324                      |
| 2EZ6.2D5 | 6.2                   | 80.5 | 1.5                     | 700       | 1.0  | 5.0                             | 3.0   | 292                      |
| 2EZ6.8D5 | 6.8                   | 73.5 | 2.0                     | 700       | 1.0  | 5.0                             | 4.0   | 266                      |
| 2EZ7.5D5 | 7.5                   | 66.5 | 2.0                     | 700       | 0.5  | 50                              | 5.0   | 242                      |
| 2EZ8.2D5 | 8.2                   | 61.0 | 2.3                     | 700       | 0.5  | 50                              | 6.0   | 220                      |
| 2EZ9.1D5 | 9.1                   | 55.0 | 2.5                     | 700       | 0.5  | 50                              | 7.0   | 200                      |
| 2EZ10D5  | 10                    | 50.0 | 3.5                     | 700       | 0.25 | 50                              | 7.6   | 182                      |
| 2EZ11D5  | 11                    | 45.5 | 4.0                     | 700       | 0.25 | 50                              | 8.4   | 166                      |
| 2EZ12D5  | 12                    | 41.5 | 4.5                     | 700       | 0.25 | 1.0                             | 9.1   | 152                      |
| 2EZ13D5  | 13                    | 38.5 | 5.0                     | 700       | 0.25 | 0.5                             | 9.9   | 138                      |
| 2EZ14D5  | 14                    | 35.7 | 5.5                     | 700       | 0.25 | 0.5                             | 10.6  | 130                      |
| 2EZ15D5  | 15                    | 33.4 | 7.0                     | 700       | 0.25 | 0.5                             | 11.4  | 122                      |
| 2EZ16D5  | 16                    | 31.2 | 8.0                     | 700       | 0.25 | 0.5                             | 12.2  | 114                      |
| 2EZ17D5  | 17                    | 29.4 | 9.0                     | 750       | 0.25 | 0.5                             | 13.0  | 107                      |
| 2EZ18D5  | 18                    | 27.8 | 10                      | 750       | 0.25 | 0.5                             | 13.7  | 100                      |
| 2EZ19D5  | 19                    | 26.3 | 11                      | 750       | 0.25 | 0.5                             | 14.4  | 95                       |
| 2EZ20D5  | 20                    | 25.0 | 11                      | 750       | 0.25 | 0.5                             | 15.2  | 90                       |
| 2EZ22D5  | 22                    | 22.8 | 12                      | 750       | 0.25 | 0.5                             | 16.7  | 82                       |
| 2EZ24D5  | 24                    | 20.8 | 13                      | 750       | 0.25 | 0.5                             | 18.2  | 76                       |
| 2EZ27D5  | 27                    | 18.5 | 18                      | 750       | 0.25 | 0.5                             | 20.6  | 68                       |
| 2EZ30D5  | 30                    | 16.6 | 20                      | 1000      | 0.25 | 0.5                             | 22.5  | 60                       |
| 2EZ33D5  | 33                    | 15.1 | 23                      | 1000      | 0.25 | 0.5                             | 25.1  | 55                       |
| 2EZ36D5  | 36                    | 13.9 | 25                      | 1000      | 0.25 | 0.5                             | 27.4  | 50                       |
| 2EZ39D5  | 39                    | 12.8 | 30                      | 1000      | 0.25 | 0.5                             | 29.7  | 47                       |
| 2EZ43D5  | 43                    | 11.6 | 35                      | 1500      | 0.25 | 0.5                             | 32.7  | 43                       |
| 2EZ47D5  | 47                    | 10.6 | 40                      | 1500      | 0.25 | 0.5                             | 35.8  | 39                       |
| 2EZ51D5  | 51                    | 9.8  | 48                      | 1500      | 0.25 | 0.5                             | 38.8  | 36                       |
| 2EZ56D5  | 56                    | 9.0  | 55                      | 2000      | 0.25 | 0.5                             | 42.6  | 32                       |
| 2EZ62D5  | 62                    | 8.1  | 60                      | 2000      | 0.25 | 0.5                             | 47.1  | 29                       |
| 2EZ68D5  | 68                    | 7.4  | 75                      | 2000      | 0.25 | 0.5                             | 51.7  | 27                       |
| 2EZ75D5  | 75                    | 6.7  | 90                      | 2000      | 0.25 | 0.5                             | 56.0  | 24                       |
| 2EZ82D5  | 82                    | 6.1  | 100                     | 3000      | 0.25 | 0.5                             | 62.2  | 22                       |
| 2EZ91D5  | 91                    | 5.5  | 125                     | 3000      | 0.25 | 0.5                             | 69.2  | 20                       |
| 2EZ100D5 | 100                   | 5.0  | 175                     | 3000      | 0.25 | 0.5                             | 76.0  | 18                       |
| 2EZ110D5 | 110                   | 4.5  | 250                     | 4000      | 0.25 | 0.5                             | 83.6  | 17                       |
| 2EZ120D5 | 120                   | 4.2  | 325                     | 4500      | 0.25 | 0.5                             | 91.2  | 15                       |
| 2EZ130D5 | 130                   | 3.8  | 400                     | 5000      | 0.25 | 0.5                             | 98.8  | 14                       |
| 2EZ140D5 | 140                   | 3.6  | 500                     | 5500      | 0.25 | 0.5                             | 106.4 | 13                       |
| 2EZ150D5 | 150                   | 3.3  | 575                     | 6000      | 0.25 | 0.5                             | 114.0 | 12                       |
| 2EZ160D5 | 160                   | 3.1  | 650                     | 6500      | 0.25 | 0.5                             | 121.6 | 11                       |
| 2EZ170D5 | 170                   | 2.9  | 675                     | 7000      | 0.25 | 0.5                             | 130.4 | 11                       |
| 2EZ180D5 | 180                   | 2.8  | 725                     | 7000      | 0.25 | 0.5                             | 136.8 | 10                       |
| 2EZ190D5 | 190                   | 2.6  | 825                     | 8000      | 0.25 | 0.5                             | 144.8 | 10                       |
| 2EZ200D5 | 200                   | 2.5  | 900                     | 8000      | 0.25 | 0.5                             | 152.0 | 9.0                      |

**Note :**

- ( 1 ) Suffix " 5 " indicates ± 5.0% tolerance, suffix " 10 " indicates ± 10.0% tolerance.
- ( 2 ) " EZ " will be omitted in marking on the diode

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Zener Diodes](#) category:*

*Click to view products by [SUNMATE](#) manufacturer:*

Other Similar products are found below :

[MMSZ5245BS-7-F](#) [RKZ13B2KG#P1](#) [RKZ5.6B2KJ#R1](#) [EDZTE6113B](#) [EDZTE6116B](#) [EDZTE616.8B](#) [1N747A](#) [1N966B](#) [NTE5116A](#)  
[NTE5121A](#) [NTE5139A](#) [NTE5147A](#) [NTE5152A](#) [NTE5155A](#) [NTE5156A](#) [NTE5164A](#) [JANS1N4974US](#) [SMAJ4764A-TP](#) [RKZ5.1BKU#P6](#)  
[3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#) [3SMBJ5920B-TP](#) [3SMBJ5925B-TP](#) [TDZTR24](#) [441774C](#) [MMSZ4678-TP](#) [MMSZ5232BQ-13-F](#)  
[BZG04-36](#) [BZG05C9V1-HE3-TR](#) [HZM30NBTR-E](#) [UDZTE-175.1B](#) [3SMAJ5945B-TP](#) [3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#) [DL4746A-TP](#)  
[RKZ18B2KK#R1](#) [RKZ10B2KL#R1](#) [RKZ6.8B2KL#R1](#) [RKZ8.2B2KL#R1](#) [DZ2S240M0L](#) [SMAZ27-TP](#) [SMBZ5920B-E3/52](#) [ZMM3.0](#)  
[RD16UM-T1-A](#) [RD39S-T1-A](#) [RD9.1S-T1-A](#) [RD10S-T1-A](#) [RD20S-T1-A](#) [RD2.2S-T1-A](#) [RD2.7UM-T1-A](#)