

<b>SUPER FAST GLASS PASSIVATED RECTIFIERS</b>	<b>REVERSE VOLTAGE – 600Volts FORWARD CURRENT – 4.0 Amperes</b>
---	---

**FEATURES**

- Glass passivated chip
- Super fast switching time for high efficiency
- Low forward voltage drop and high current capability
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

**MECHANICAL DATA**

- Case: JEDEC DO-201AD molded plastic
- Polarity : Color band denotes cathode
- Weight: 0.04 ounce, 1.1 grams
- Mounting position: Any

**DO-201AD**

DO-201AD		
Dim.	Min.	Max.
A	25.4	-
B	7.30	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in millimeter		


**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**  
Ratings at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	MUR460D	UNIT			
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	600	V			
Maximum DC Blocking Voltage	$V_{DC}$	600	V			
Average Rectified Output Current @ $T_L=120^{\circ}C$	$I_{F(AV)}$	4.0	A			
Peak Forward Surge Current 8.3ms single half sine-wave, $T_j=25^{\circ}C$	$I_{FSM}$	110	A			
$I^2t$ Rating for fusing ( $3ms \leq t \leq 8.3ms$ )	$I^2t$	50	A <sup>2</sup> S			
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +175	°C			
PARAMETER	TEST CONDITIONS	SYMBOL	Min.	Typ.	Max.	UNIT
Forward Voltage (1)	$I_F=4A$ $T_j=25^{\circ}C$	$V_F$	---	---	1.28	V
Maximum DC Reverse Current	$V_R=600V$ $T_j=25^{\circ}C$ $T_j=150^{\circ}C$	$I_R$	---	---	10 250	uA
Reverse Recovery Time (Note1)		$T_{rr}$	---	---	50	ns
Single pulse avalanche energy @15mH		$E_{AS}$	---	---	10.8	mJ
THERMAL CHARACTERISTIC	SYMBOL	Typical			UNIT	
Typical Junction Capacitance per element (Note 2)	$C_j$	40			pF	
Typical thermal Resistance, Junction to Lead (Note 3)	$R_{\theta JL}$	11			°C/W	


Note : **REV. 1, Apr-2013, KDGF10**

1. Measured with  $I_F=0.5A, I_R=1A, I_{RR}=0.25A$ .
2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
3. Measured point from body 1mm by lead.


**FIG.1- FORWARD CURRENT DERATING CURVE**

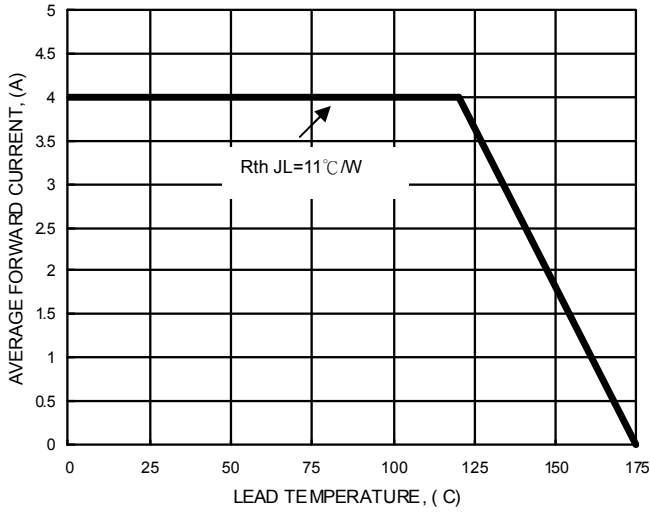


**FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT**

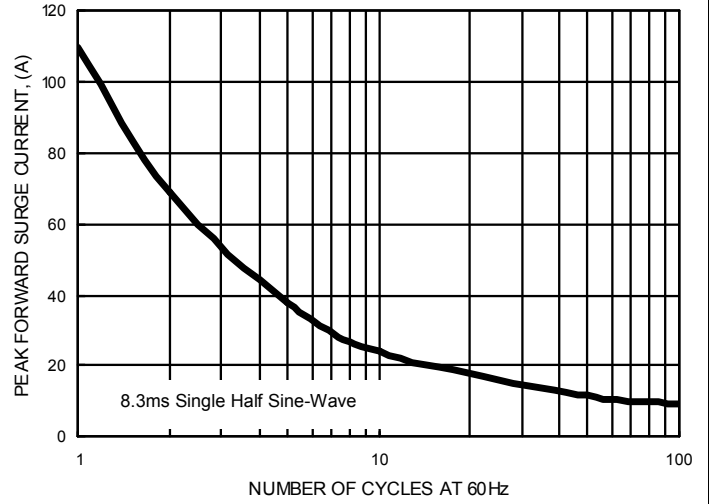


**FIG.3- TYPICAL FORWARD CHARACTERISTICS**

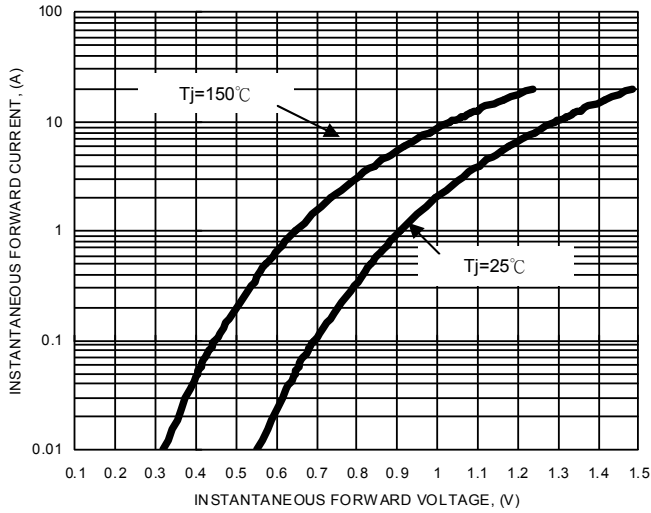


**FIG.4- TYPICAL JUNCTION CAPACITANCE**

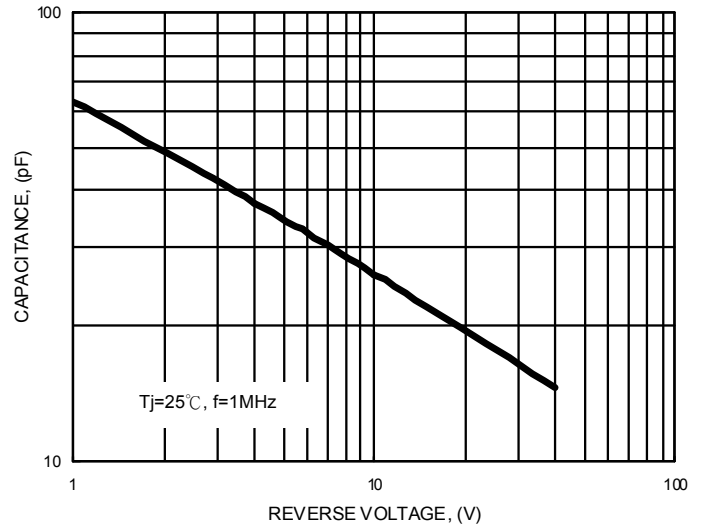

**FIG.5- TYPICAL REVERSE CHARACTERISTICS**

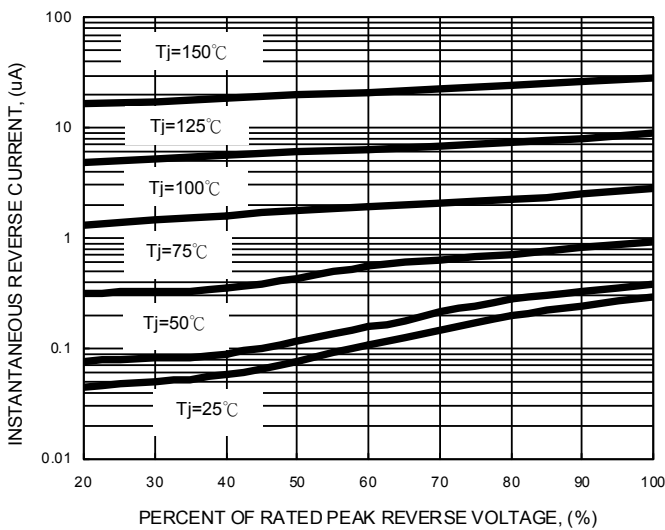

**FIG.6 NON-REPETITIVE SURGE CURRENT**

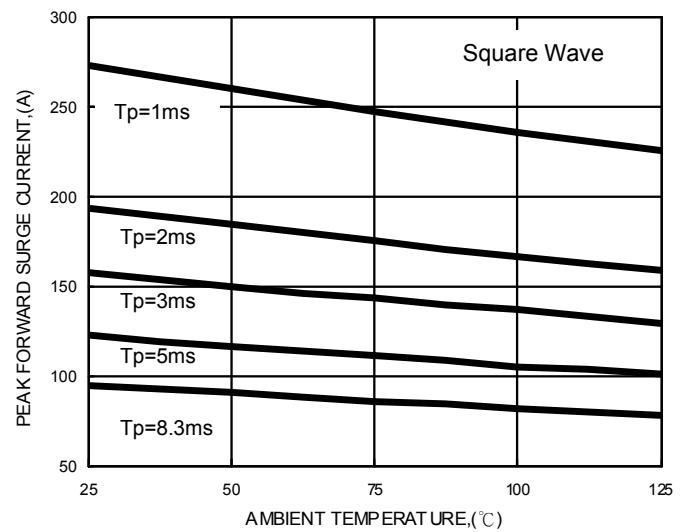

## **Important Notice and Disclaimer**

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rectifiers](#) category:*

*Click to view products by [Lite-On](#) manufacturer:*

Other Similar products are found below :

[D91A](#) [DA24F4100L](#) [DD89N1600K-A](#) [DD89N16K-K](#) [RL252-TP](#) [DLA11C-TR-E](#) [DSA17G](#) [DSEI2X30-06C](#) [1N4005-TR](#) [BAV199-TP](#)  
[UFS120Je3/TR13](#) [JANS1N6640US](#) [VS-80-1293](#) [DD89N16K](#) [DD89N16K-A](#) [481235F](#) [DSP10G-TR-E](#) [067907F](#) [MS306](#) [ND104N08K](#)  
[SPA2003-B-D-A01](#) [VS-80-6193](#) [VS-66-9903](#) [VGF0136AB](#) [US2JFL-TP](#) [UFS105Je3/TR13](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#)  
[RF301B2STL](#) [RF501B2STL](#) [UES1306](#) [UES1302](#) [BAV199E6433HTMA1](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [JANTXV1N5660A](#) [UES1106](#)  
[GS2K-LTP](#) [D126A45C](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [STTH20P035FP](#) [VS-8EWS12S-M3](#) [VS-](#)  
[12FL100S10](#) [ACGRA4001-HF](#)