
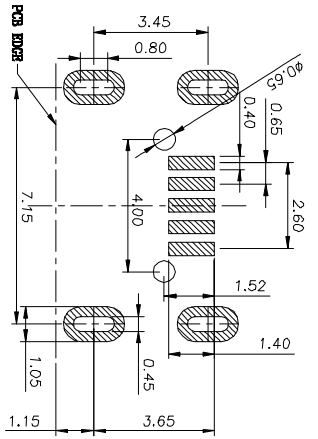

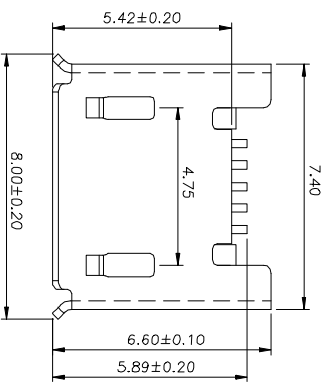
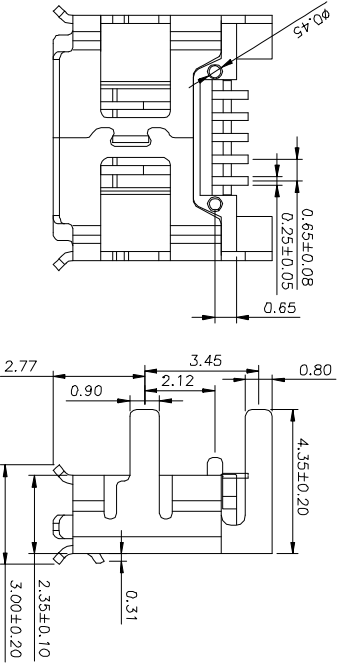


客户确认
日期



RECOMMENDED PCB LAYOUT
(TOL: ±0.05)

规格说明: Specifications:
电气特性: Electrical:

1. 额定电流 Current Rating
1.0A/contact terminal
 2. 额定电压 Voltage Rating
30V DC
 3. 接触阻抗: Contact Resistance
50 milliohms Max
 4. 耐电压: Dielectric Withstanding Voltage
300 V AC AT Sea Level
 5. 绝缘阻抗: Insulation Resistance
100MEGA ohms MIN
- 原材料: Raw material:
1. 塑胶: Plastic cement
Hing Temperature Thermoplastics,
UL 94V-0 LCP Black
2. 端子: Contact: Copper Alloy C5191
3. 外壳: Shell: Copper Alloy C2680
电镀: Electroplate:
1. 端子: Contact: Plated Gold in Mating Area
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating

APPROVED:	DATE:	TITLE: Micro usb 5P 2型 SMT 四脚加长插板 带挂 卷边			
CHECKED:	DATE:	CLIENT P/N U-MICRM05P-BF13			
DRAWN:	DATE:	UNIT	mm	SCALE	Free
SXA	2019-05-22	FILE NO.	/	REV.	A
TOLERANCE TABLE					
.0	±0.30				
.00	±0.20				
.000	±0.05				

深圳市灿科盟实业有限公司
KIMT W CHANKEMENG INDUSTRY CO., LTD

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [Cankemeng](#) manufacturer:

Other Similar products are found below :

[10033527-N3112MLF](#) [17-210561](#) [GMCB05B11124H1EU](#) [17-200931](#) [65-647-8-BK-BU](#) [690-010-295-484](#) [73725-1191BLF](#) [950](#) [E8144-B01021-L](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBB15131](#) [MUSBC111M5](#) [MUSBD11135](#) [217450-1](#) [CA 6 W LD](#) [896-30-004-00-000000](#) [KUSBVX-BS1N-W30](#) [KUSBX-AP-KIT-SCBLK](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W](#) [KUSBX-SMTAS1NBTR](#) [KUSBX-SMTBS1NBTR](#) [30-498-6](#) [SK-60A-2](#) [17-200261](#) [17-210051](#) [1734082-1](#) [FK-37-32SL](#) [30-1574](#) [30-470](#) [30-489](#) [30-541](#) [30-572-3](#) [30-9503](#) [M9177/2-1](#) [MAB 5 S](#) [MIKROE-1451](#) [33UBBR-04SW11R](#) [USBFTV2PEM2G](#) [USBFTVC6ZN](#) [USBFTVSCCG](#) [KUSBX-AS2N-W30](#) [KUSBX-SLAS1N-W](#) [KUSBX-SLAS1N-W30](#) [1-1734084-2](#) [E8110-001-01](#) [MUSBC11135](#) [NK-27-32SL](#)