


N-channel Enhanced mode TO-251N/S/U/TO-252/TO-220F /TO-251/TO-251NX/TO-220/TO-251Q /TO-251MQ MOSFET

Features

- High ruggedness
- Low $R_{DS(ON)}$ (Typ 1.7Ω) @ $V_{GS}=10V$
- Low Gate Charge (Typ 26nC)
- Improved dv/dt Capability
- 100% Avalanche Tested
- Application: TV-Power , LED , Charge

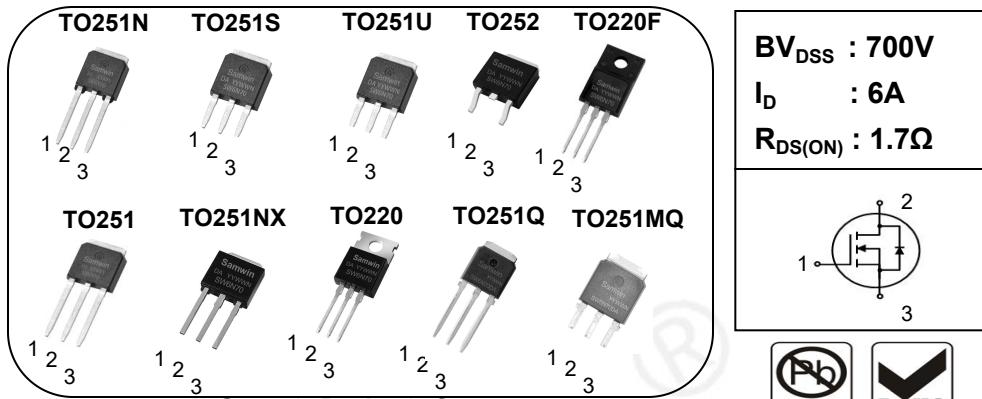


1. Gate 2. Drain 3. Source

BV_{DSS} : 700V

I_D : 6A

$R_{DS(ON)}$: 1.7Ω



General Description

This power MOSFET is produced with advanced technology of SAMWIN.

This technology enable the power MOSFET to have better characteristics, including fast switching time, low on resistance, low gate charge and especially excellent avalanche characteristics.

Order Codes

Item	Sales Type	Marking	Package	Packaging
1	SW N 6N70DA	SW6N70DA	TO-251N	TUBE
2	SW SI 6N70DA	SW6N70DA	TO-251S	TUBE
3	SW UI 6N70DA	SW6N70DA	TO-251U	TUBE
4	SW D 6N70DA	SW6N70DA	TO-252	REEL
5	SW F 6N70DA	SW6N70DA	TO-220F	TUBE
6	SW I 6N70DA	SW6N70DA	TO-251	TUBE
7	SW NX 6N70DA	SW6N70DA	TO-251NX	TUBE
8	SW P 6N70DA	SW6N70DA	TO-220	TUBE
9	SW QI 6N70DA	SW6N70DA	TO-251Q	TUBE
10	SW MQI 6N70DA	SW6N70DA	TO-251MQ	TUBE

Absolute maximum ratings

Symbol	Parameter	Value							Unit
		TO251S/ TO251U	TO252	TO220F	TO251/T O251N	TO251 NX	TO220	TO-251Q/TO- 251MQ	
V_{DSS}	Drain to source voltage				700				V
I_D	Continuous drain current (@ $T_C=25^\circ C$)				6*				A
	Continuous drain current (@ $T_C=100^\circ C$)				3.8*				A
I_{DM}	Drain current pulsed (note 1)				24				A
V_{GS}	Gate to source voltage				± 30				V
E_{AS}	Single pulsed avalanche energy (note 2)				216				mJ
E_{AR}	Repetitive avalanche energy (note 1)				20				mJ
dv/dt	Peak diode recovery dv/dt (note 3)				5				V/ns
P_D	Total power dissipation (@ $T_C=25^\circ C$)	138.8	195.3	21.9	138.8	147	186.6	138.8	W
	Derating factor above 25°C	1.11	1.56	0.18	1.11	1.18	1.49	1.11	W/°C
T_{STG}, T_J	Operating junction temperature & storage temperature				-55 ~ + 150				°C
T_L	Maximum lead temperature for soldering purpose, 1/8 from case for 5 seconds.				300				°C

*. Drain current is limited by junction temperature.

Thermal characteristics

Symbol	Parameter	Value							Unit
		TO251S/ TO251U	TO252	TO220F	TO251/TO 251N	TO251 NX	TO220	TO-251Q/TO-25 1MQ	
R _{thjc}	Thermal resistance, Junction to case	0.9	0.64	5.7	0.9	0.85	0.67	0.9	°C/W
R _{thja}	Thermal resistance, Junction to ambient	80		46.9	80	100	59.2	80	°C/W

Electrical characteristic (T_C = 25°C unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
Off characteristics						
BV _{DSS}	Drain to source breakdown voltage	V _{GS} =0V, I _D =250μA	700			V
ΔBV _{DSS} / ΔT _J	Breakdown voltage temperature coefficient	I _D =250μA, referenced to 25°C		0.42		V/°C
I _{DSS}	Drain to source leakage current	V _{DS} =700V, V _{GS} =0V			1	uA
		V _{DS} =560V, T _C =125°C			50	uA
I _{GSS}	Gate to source leakage current, forward	V _{GS} =30V, V _{DS} =0V			100	nA
	Gate to source leakage current, reverse	V _{GS} =-30V, V _{DS} =0V			-100	nA
On characteristics						
V _{GS(TH)}	Gate threshold voltage	V _{DS} =V _{GS} , I _D =250μA	2.5		4.5	V
R _{DS(ON)}	Drain to source on state resistance	V _{GS} =10V, I _D =3A		1.7	1.9	Ω
G _f	Forward transconductance	V _{DS} =30V, I _D =3A		5		S
Dynamic characteristics						
C _{iss}	Input capacitance	V _{GS} =0V, V _{DS} =25V, f=1MHz		1040		pF
C _{oss}	Output capacitance			88		
C _{rss}	Reverse transfer capacitance			18		
t _{d(on)}	Turn on delay time	V _{DS} =350V, I _D =6A, R _G =25Ω, V _{GS} =10V (note 4,5)		21		ns
t _r	Rising time			34		
t _{d(off)}	Turn off delay time			65		
t _f	Fall time			33		
Q _g	Total gate charge	V _{DS} =560V, V _{GS} =10V, I _D =6A (note 4,5)		26		nC
Q _{gs}	Gate-source charge			5.5		
Q _{gd}	Gate-drain charge			11		
R _g	Gate resistance	V _{DS} =0V, Scan F mode		2.5		Ω

Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I _S	Continuous source current	Integral reverse p-n Junction diode in the MOSFET			6	A
I _{SM}	Pulsed source current				24	A
V _{SD}	Diode forward voltage drop.	I _S =6A, V _{GS} =0V			1.4	V
t _{rr}	Reverse recovery time	I _S =6A, V _{GS} =0V, dI _F /dt=100A/us		315		ns
Q _{rr}	Reverse recovery charge	dI _F /dt=100A/us		2.95		uC

※. Notes

- Repetitive rating : pulse width limited by junction temperature.
- L = 12mH, I_{AS} = 6A, V_{DD} = 100 V, R_G = 25Ω, Starting T_J = 25°C
- I_{SD} ≤ 6A, di/dt = 100A/us, V_{DD} ≤ BV_{DSS}, Starting T_J = 25°C
- Pulse Test : Pulse Width ≤ 300us, duty cycle ≤ 2%
- Essentially independent of operating temperature.

Fig. 1. On-state characteristics

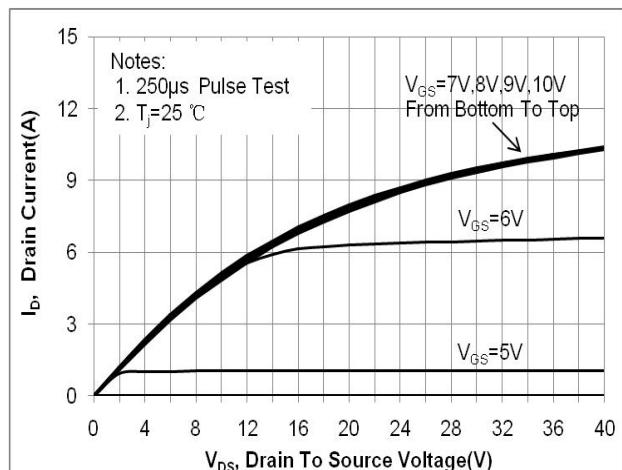


Fig. 2. Transfer Characteristics

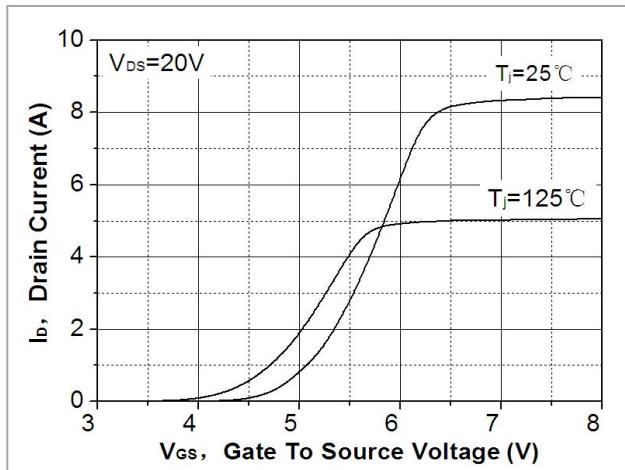


Fig. 3. On-resistance variation vs. drain current and gate voltage

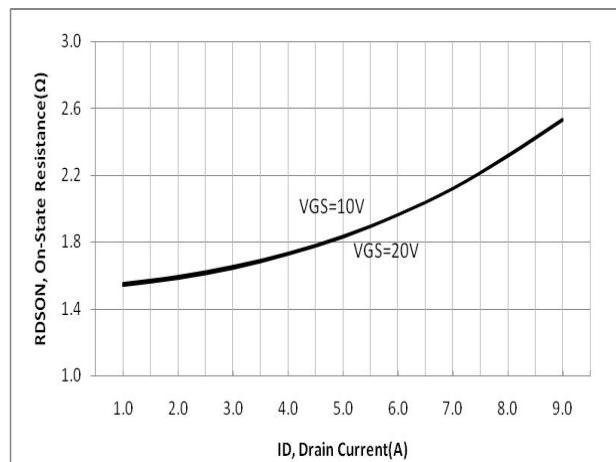


Fig. 4. On state current vs. diode forward voltage

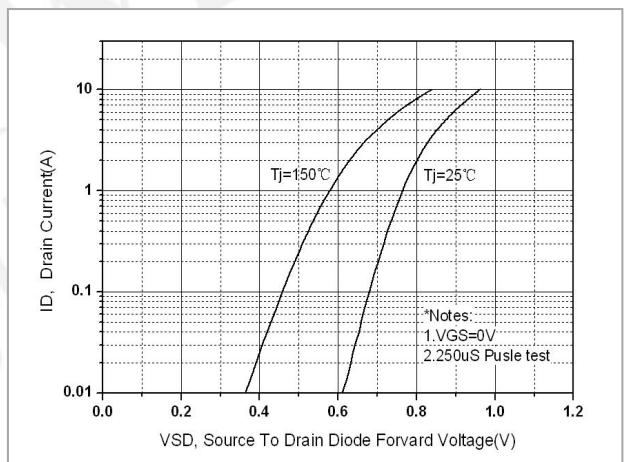


Fig 5. Breakdown Voltage Variation vs. Junction Temperature

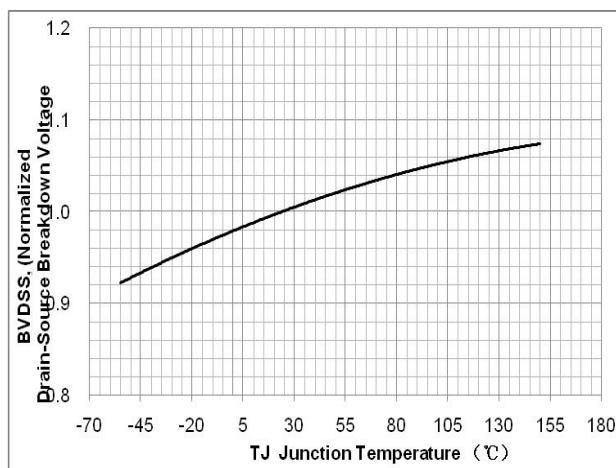


Fig. 6. On resistance variation vs. junction temperature

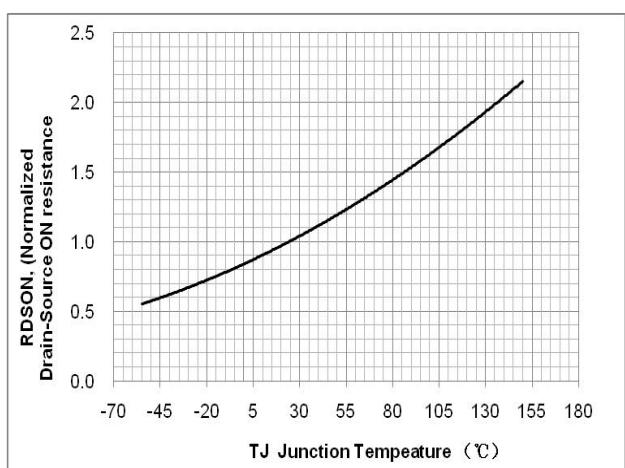


Fig. 7. Gate charge characteristics

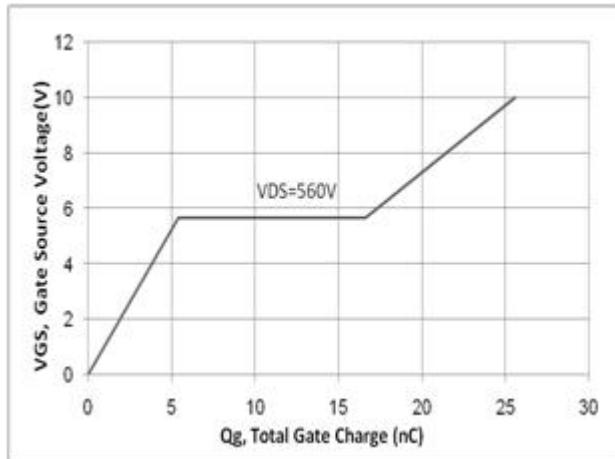


Fig. 8. Capacitance Characteristics

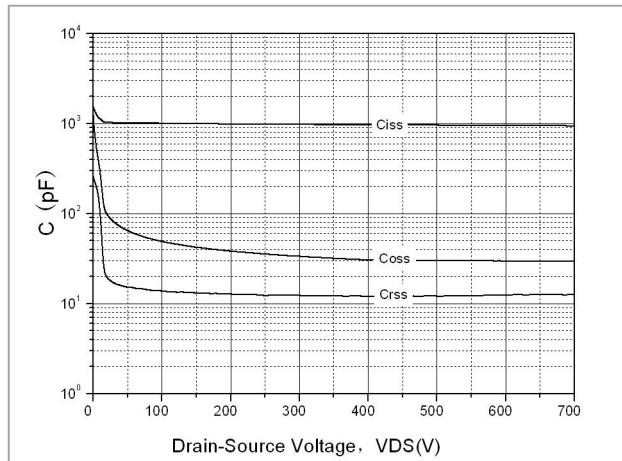


Fig. 9. Maximum safe operating area (TO-251S&TO-251U)

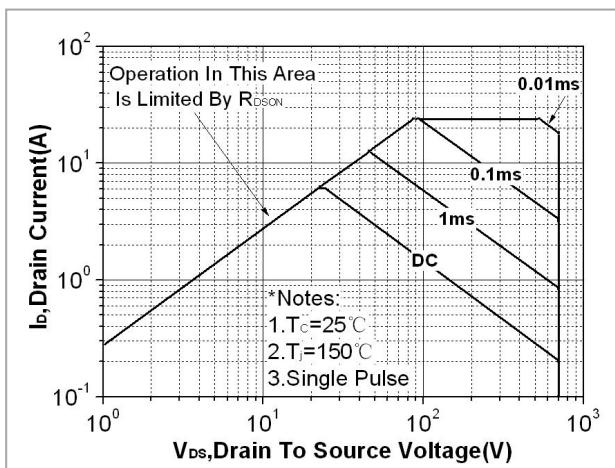


Fig.10. Maximum safe operating area(TO-252)

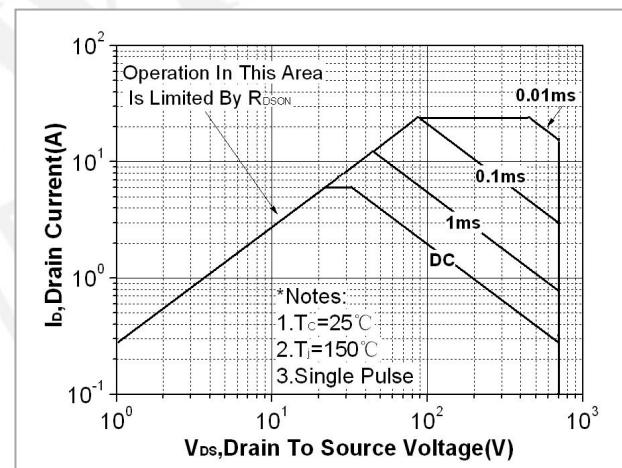


Fig. 11. Maximum safe operating area(TO-220F)

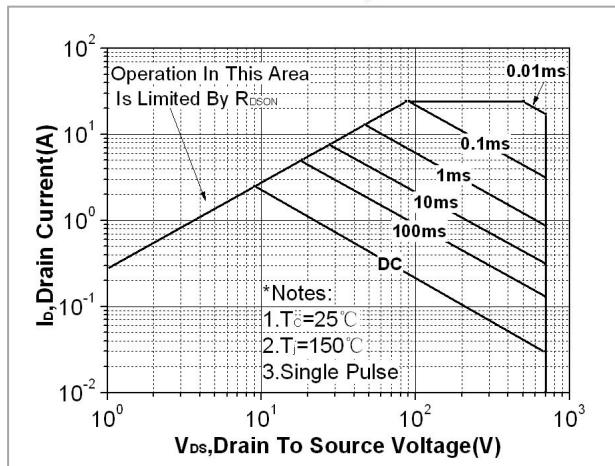


Fig. 12. Maximum safe operating area(TO-251&TO-251N)

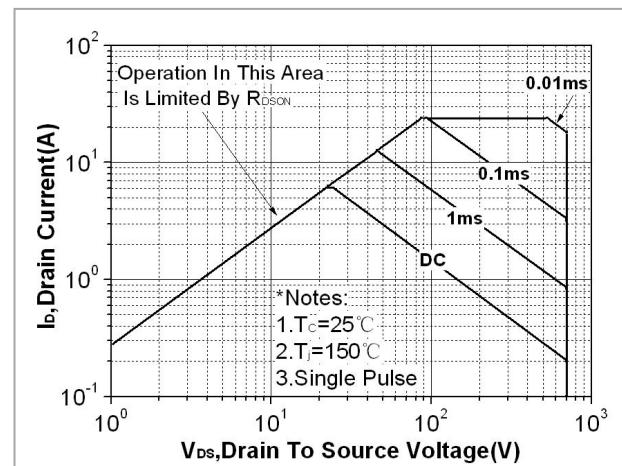


Fig. 13. Maximum safe operating area(TO-251NX)

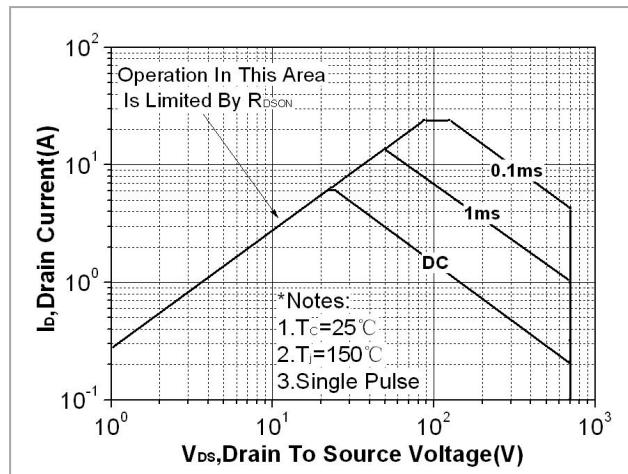


Fig. 14. Maximum safe operating area(TO-220)

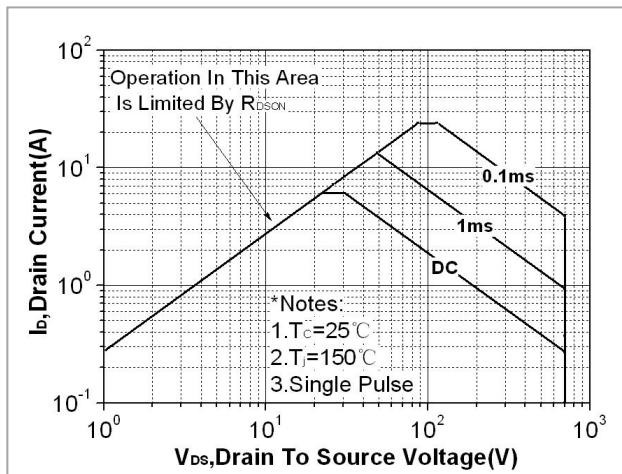


Fig. 15. Maximum safe operating area(TO-251Q&TO-251MQ)

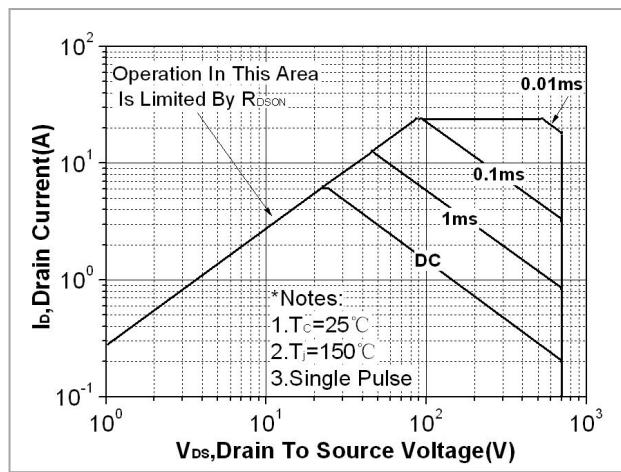


Fig. 16. Transient thermal response curve(TO-251S&TO-251U)

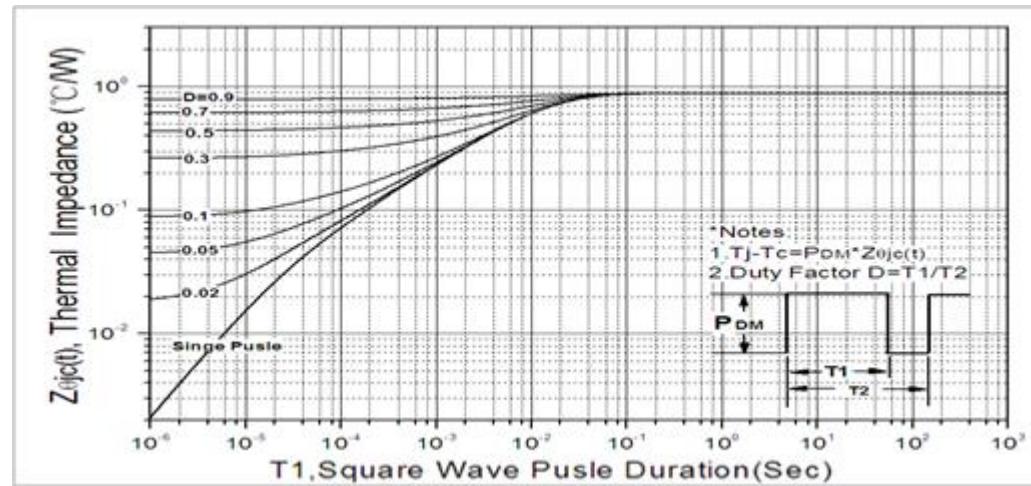


Fig. 17. Transient thermal response curve(TO-252)

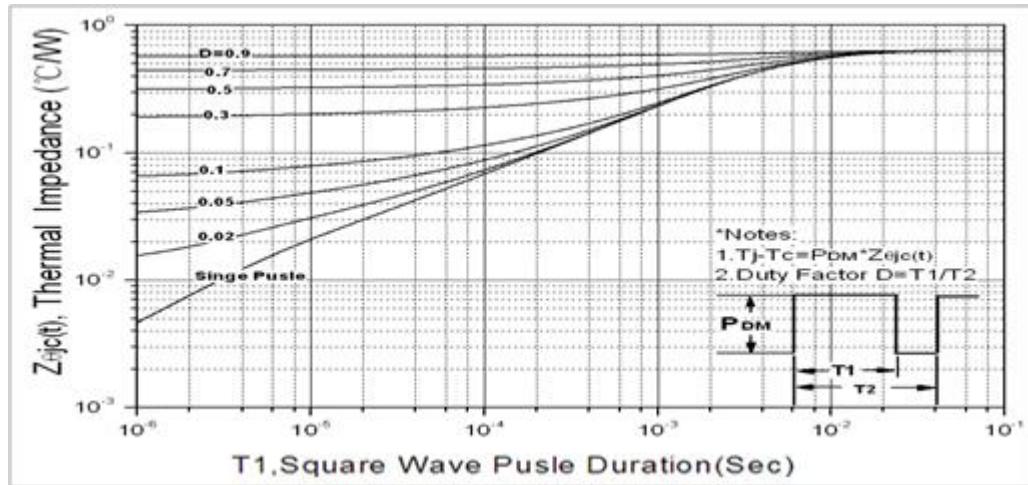


Fig. 18. Transient thermal response curve(TO-220F)

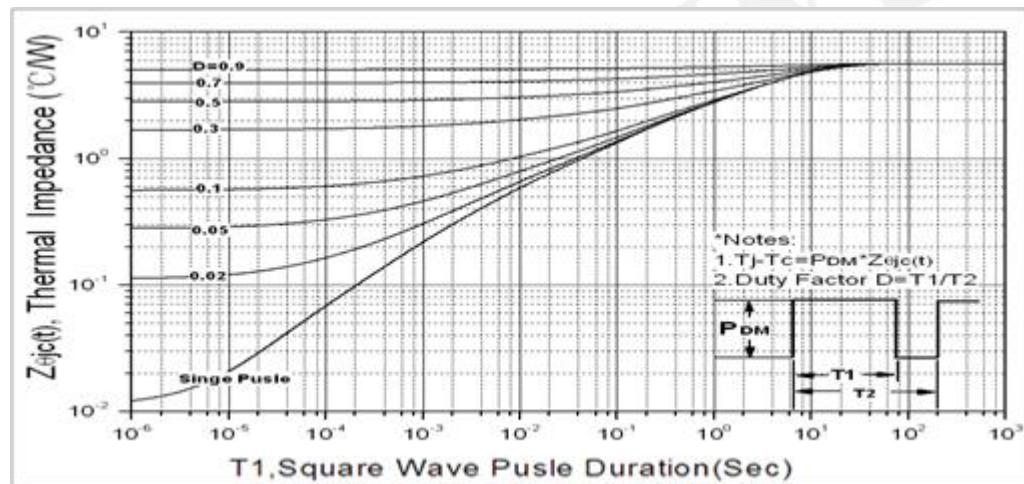


Fig. 19. Transient thermal response curve(TO-251&TO-251N)

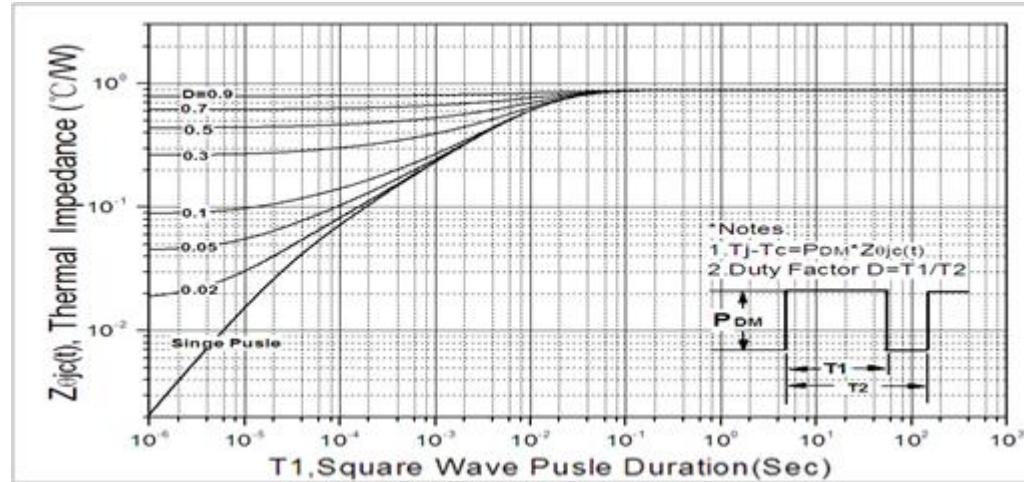


Fig. 20 Transient thermal response curve(TO-251NX)

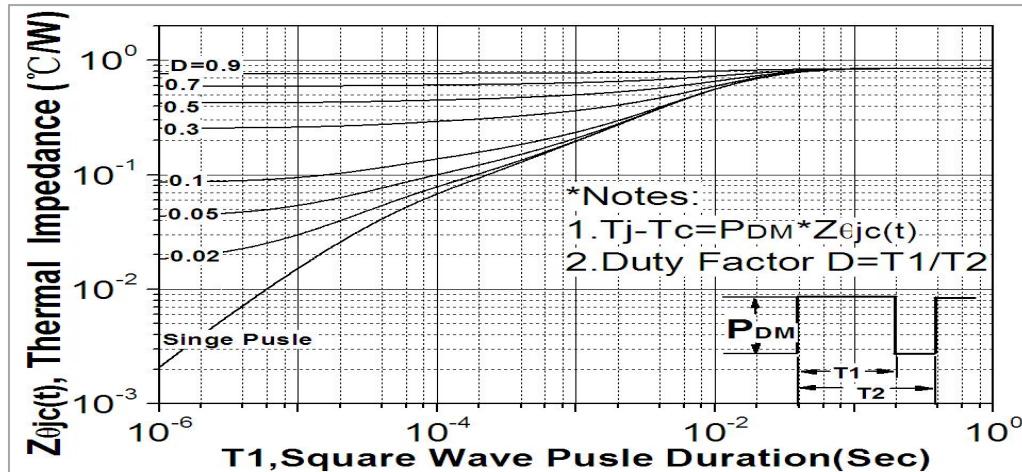


Fig. 21. Transient thermal response curve(TO-220)

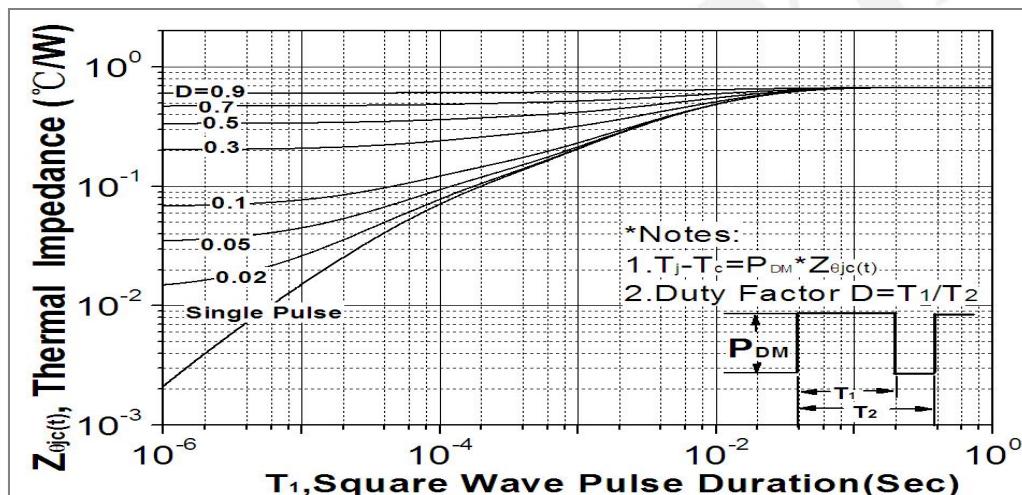


Fig. 22. Transient thermal response curve(TO-251Q&TO-251MQ)

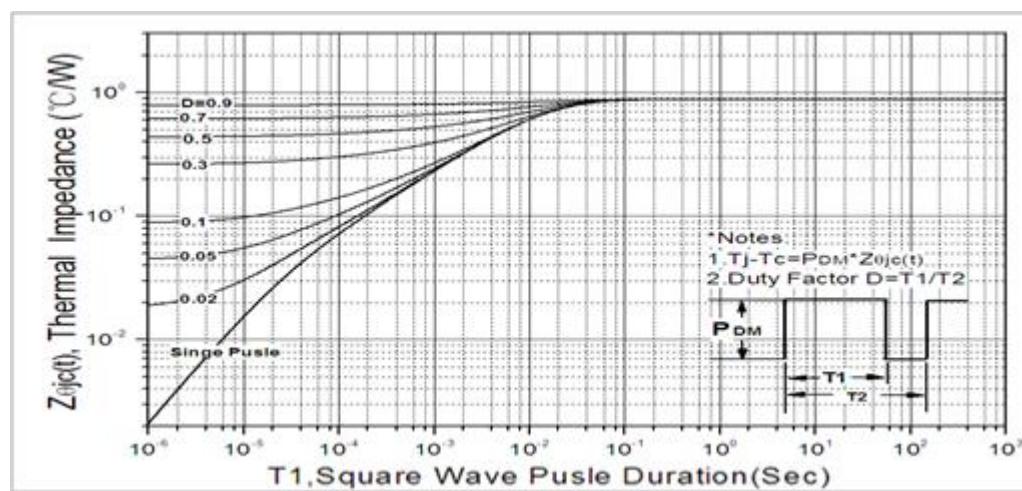


Fig. 23. Gate charge test circuit & waveform

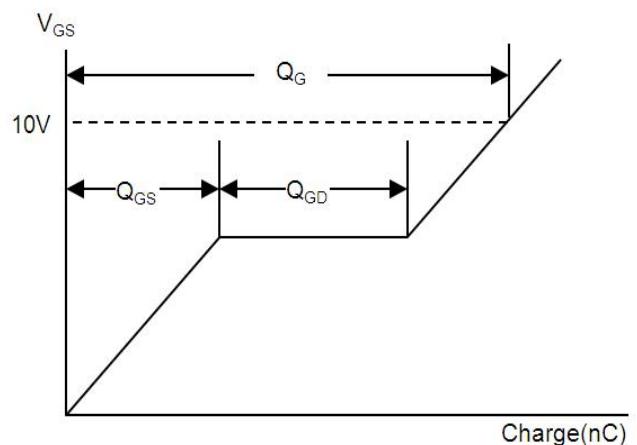
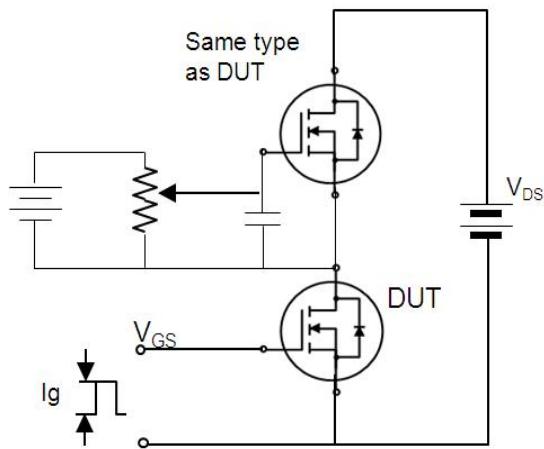


Fig. 24. Switching time test circuit & waveform

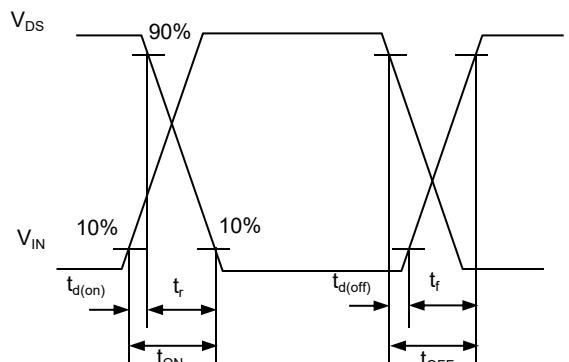
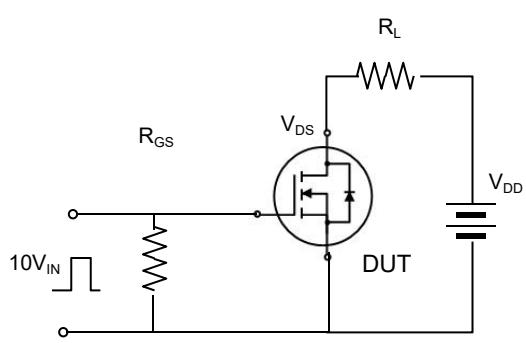


Fig. 25. Unclamped Inductive switching test circuit & waveform



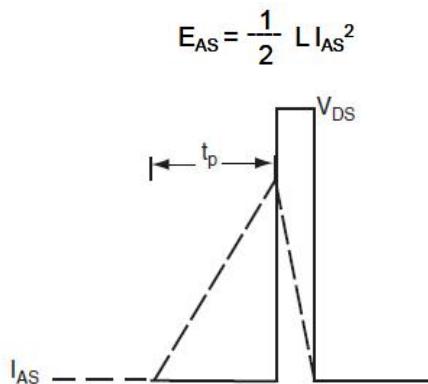


Fig. 26. Peak diode recovery dv/dt test circuit & waveform

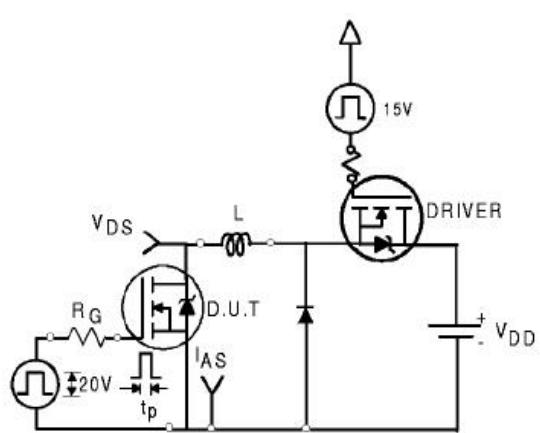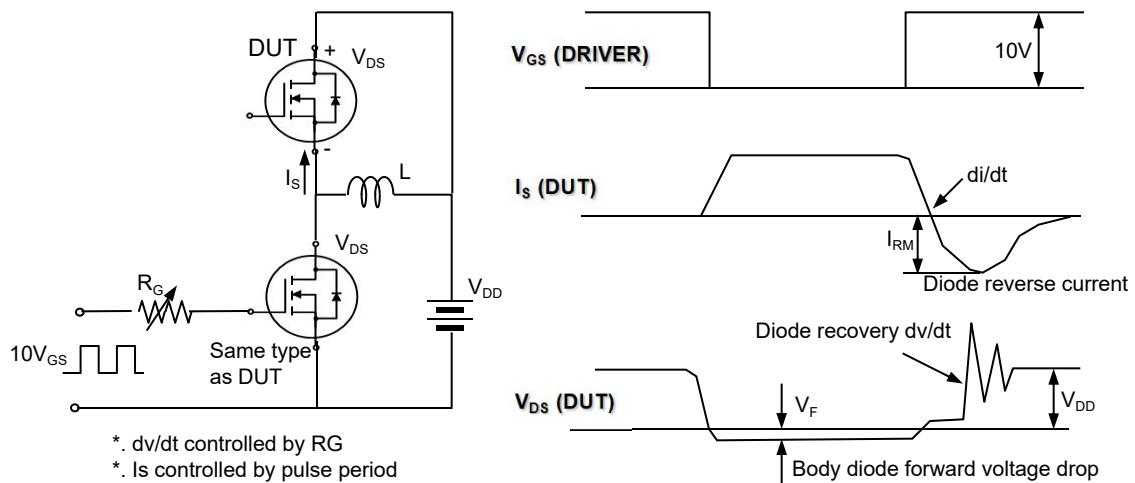

DISCLAIMER

- * All the data & curve in this document was tested in XI'AN SEMIPOWER TESTING & APPLICATION CENTER.
- * This product has passed the PCT, TC, HTRB, HTGB, HAST, PC and Solderdunk reliability testing.
- * Qualification standards can also be found on the Web site (<http://www.semipower.com.cn>)
- * Suggestions for improvement are appreciated, Please send your suggestions to samwin@samwinsemi.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Sam&wing manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)