


P. C. B LAYOUT TOP VIEW

- NOTES:
1. CONTACT CURRENT RATING: 10 A;
  2. CONTACT RESISTANCE: 50 mΩ MAX.;
  3. INSULATION RESISTANCE: 100MΩ MIN.;
  4. DIELECTRIC WITHSTANDING: 36 V AC MIN.;
  5. DURABILITY: 5,000 CYCLES MIN.;
  6. CONNECTOR MATING FORCES:  
29.4N (3.00Kgf) MAX.;
  7. CONNECTOR UNMATING FORCES:  
2.94N(0.30Kgf) MIN.;

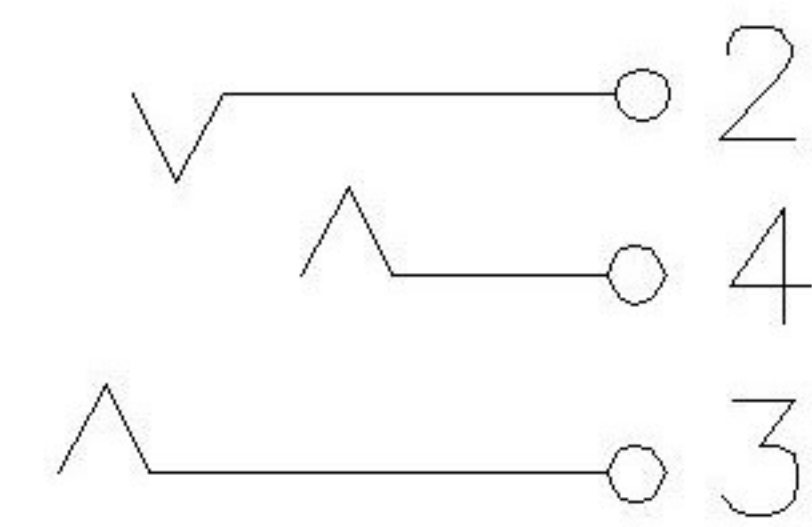

ΔX						ANGULAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE:	DC JACK
ΔX						L ≤ 4	±0.2	DWN		DATE		VIEW:	PART NO.:	
ΔX						4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm	DWG NO.:	DC-042E
MARK	DESCRIPTION	REVISIONS	DATE	REVISED	APPROVED	16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4	WEIGHT	SHEET
						L > 63	±0.5						1.0g	1/1
						UNSPECIFIED TOLERANCES							REVISION	A0
								XKB INDUSTRIAL PRECISION CO., LIMITED						

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DC Power Connectors](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[1600206-1](#) [163-0301-EX](#) [163-0302](#) [163-0308-EX](#) [163-0310-EX](#) [163-1061-EX](#) [163-1100-EX](#) [163-4024](#) [163-4117-EX](#) [163-4118-EX](#) [163-5005-E](#) [163-7421](#) [163-MJ22-EX](#) [171-0721-EX](#) [171-0725-EX](#) [171-3118-EX](#) [171-3210-E](#) [171-3221-EX](#) [171-3222-EX](#) [171-A1326-EX](#) [173-23507-ST-EX](#) [173-5521TIP-EX](#) [173-6330TIP-EX](#) [KLDVX-SMT-02-ATR](#) [KLDX-0201-AHT-1](#) [KLDX-0202-AHT](#) [KLDX-SMT-0202-BP](#) [KLDX-SMT-0202-BPTR](#) [163-0179-EX](#) [163-0307-E](#) [163-0309-EX](#) [163-4007-EX](#) [163-4015-EX](#) [163-4025](#) [163-4119-E](#) [163-4303-E](#) [16PJ101-EX](#) [171-0702-EX](#) [171-0722-E](#) [171-0726-EX](#) [171-2122-EX](#) [171-3216-EX](#) [171-3218-EX](#) [171-3219-EX](#) [171-3220-EX](#) [171-7391](#) [173-3413-ST-EX](#) [173-4017-ST-EX](#) [RAPCBRK](#) [K596](#)