


SWITCH CONNECTOR

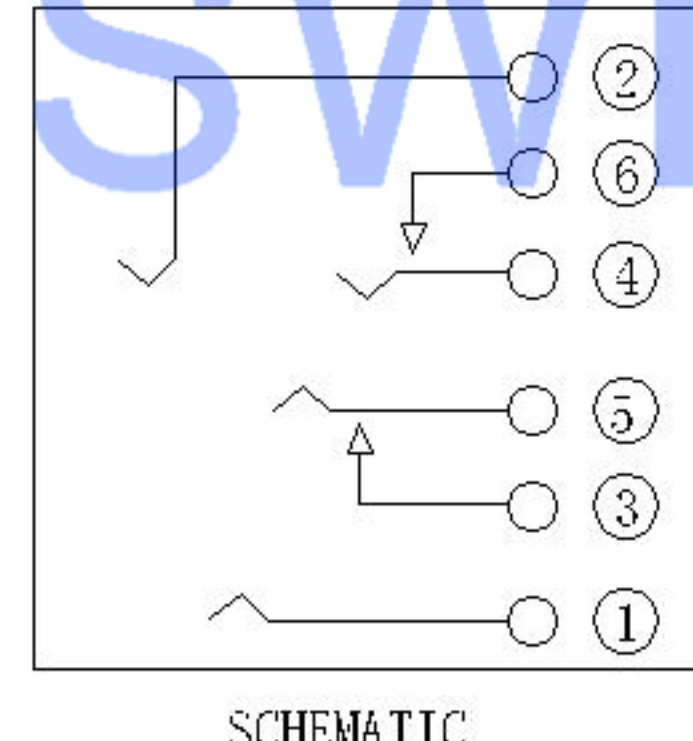

SCHMATIC

(3.50mm 1 POLE PLUG DETAIL DRAFTING)

- NOTES:
- REFER TO GFS025, REQUEST OF THE SPECIFICATION:
 - (1) CONTACT RESISTANCE: 50mΩ MAX.;
 - (2) INSULATION RESISTANCE: 100MΩ MIN.;
 - (3) DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - (4) DURABILITY: SEE TABLE B;
 - (5) CONNECTOR MATING FORCES: 2.91*29. IN (0.3*3.00kgf);
 - (6) CONNECTOR UNMATING FORCES: 2.91*29. IN (0.3*3.00kgf);

	MATERIAL	PLATING
terminal 1	copper alloy	silver
terminal 2	copper alloy	silver
terminal 3	copper alloy	silver
terminal 4	copper alloy	silver
plastic	PA10T	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK		
△X					ANGULAR ±5°	DWN	DATE	VIEW:	PART NO. :		
△X					L ≤ 4 ±0.2	CHKD	DATE	UNIT: mm	DWG NO. :		
△X					4 < L ≤ 16 ±0.3	APPD	DATE	SIZE: A1	PJ-2065-SMT		
					16 < L ≤ 63 ±0.4				WEIGHT	SHEET	REVISION
					L > 63 ±0.5				1.0g	1/1	A0
						KXB INDUSTRIAL PRECISTON CO., LIMITED					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[60KD4M](#) [12DL6MX](#) [12JL6M](#) [17DN100-EX](#) [17DN101-EX](#) [SMD7FRA011](#) [16PJ224-E](#) [M55116/1-2](#) [KQLAX-8P](#) [164-229-6-5](#) [M55116/10-0](#)
[SMD5FRA021](#) [15AN84X](#) [13AL6FX](#) [61GA5F](#) [152-002-2-4](#) [0134 05](#) [MDC-004](#) [MDC-104](#) [MDC-204](#) [MDC-208](#) [12BPKG](#) [DC-001](#) [591-](#)
[0400](#) [591-0500](#) [DS1093-01-BN40](#) [593-0700](#) [MJ-372-4](#) [MJ-372-6](#) [MJ-372-8](#) [57PC5M](#) [591-0800](#) [592-0301](#) [592-0511](#) [164-377](#) [610-0520](#)
[0105 05](#) [0105 08](#) [0107 08-1](#) [690-0300](#) [0132 05](#) [930009200 MAB 4](#) [930071200 MAB 5 S](#) [930303517 MAB 3100 S GRAU](#) [930345200 MAB](#)
[8 S](#) [930356517 MAS 70 S GRAU](#) [930778500 MAB 6 H](#) [930959517 MAK 4100](#) [930961517 MAK 5100 S](#) [930964517 MAS 5100](#)