APPROVAL SHEET

MULTILAYER CERAMIC CAPACITORS

Soft Termination Series

(SH_6.3V to 3000V)

NP0, X7R, X5R & Y5V Dielectrics

0402 to 1812 Sizes

Halogen Free & RoHS Compliance

*Contents in this sheet are subject to change without prior notice.

Copyright © by Walsin Technology Corporation. | All rights reserved.

1. INTRODUCTION

WTC soft termination series MLCC is designed and with a polymer layer within end terminations of product, which can absorb mechanical stress caused by PCB handling in SMT line and reduce the mechanical impact for product. It will offer more robust and reliable performance in applications.

2. FEATURES

a. MLCC's termination are with a soft & flexible polymer layer to withstand high bending stress in SMT line.
b. Available for any item in standard series range.

3. APPLICATIONS

a. Automotive industry.
b. Power supply and related industries.
c. Lighting industry.
d. The other mechanical stress concerned products.

4. HOW TO ORDER

SH	31	B	104	K	500	C	T
Series	**Size**	**Dielectric**	**Capacitance**	**Tolerance**	**Rated voltage**	**Termination**	**Packaging**
SH=Soft termination	**15**=0402 (1005) **18**=0603 (1608) **21**=0805 (2012) **31**=1206 (3216) **32**=1210 (3225) **43**=1812 (4532)	**N**=NP0 (C0G) **B**=X7R **X**=X5R **F**=Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point. Eg. 104=10x10^4 =100nF	**B**=±0.1pF **C**=±0.25pF **D**=±0.5pF **F**=±1% **G**=±2% **J**=±5% **K**=±10% **M**=±20% **Z**=-20/+80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. **6R3**=6.3 VDC **100**=10 VDC **160**=16 VDC **250**=25 VDC **500**=50 VDC **101**=100 VDC **201**=200 VDC **251**=250 VDC **401**=400 VDC **451**=450 VDC **501**=500 VDC **631**=630 VDC **102**=1000 VDC **152**=1500 VDC **202**=2000 VDC **302**=3000 VDC	**C**=Ag Polymer /Ni/Sn	**T**=7" reeled **G**=13" reeled

Copyright © by Walsin Technology Corporation. | All rights reserved.

5. EXTERNAL DIMENSIONS & CONSTRUCTIONS

Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		Remark	M_B (mm)
0402 (1005)	1.00±0.20	0.50±0.20	0.50±0.20	E	#	0.25 +0.05/-0.10
0603 (1608)	1.60±0.20	0.80±0.10	0.80±0.07	S		0.40±0.15
	1.60±0.30	0.80±0.30	0.80±0.30	X		
0805 (2012)	2.00±0.20	1.25±0.10	0.60±0.10	A		0.50±0.20
			0.80±0.10	B		
			1.25±0.10	D	#	
	2.00±0.30	1.25±0.30	1.25±0.30	I	#	
1206 (3216)	3.20+0.4/-0.1	1.60±0.15	0.80±0.10	B		0.60±0.20 (0.50±0.25)*
			0.95±0.10	C	#	
			1.15±0.15	J	#	
			1.25±0.10	D	#	
	3.20+0.4/-0.1	1.60±0.20	1.60±0.20	G	#	
	3.20±0.50	1.60±0.50	1.60±0.50	P	#	
1210 (3225)	3.20±0.40	2.50±0.20	0.95±0.10	C	#	0.75±0.25
			1.25±0.10	D	#	
	3.20±0.60	2.50±0.50	1.60±0.20	G	#	
			2.00±0.20	K	#	
			2.50±0.50	M	#	
1808 (4520)	4.50+0.6/-0.4	2.03±0.25	1.25±0.10	D	#	0.50±0.25
			2.00±0.20	K	#	
1812 (4532)	4.50+0.6/-0.4	3.20±0.30	1.25±0.10	D	#	0.75±0.25 (0.50±0.25)*
			1.60±0.20	G	#	
			2.00±0.20	K	#	
		3.20±0.40	2.50±0.50	M	#	



Fig. 1 The outline of MLCC

Reflow soldering only is recommended.
* For 1206≧1000V, 1812_200V~4000V products.

6. GENERAL ELECTRICAL DATA

Dielectric	NP0	X7R	X5R	Y5V
Size	0402, 0603, 0805, 1206, 1210, 1812			
Capacitance range*	0.1pF to 0.039μF	100pF to 47μF	0.027μF to 10μF	0.01μF to 4.7μF
Capacitance tolerance**	Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%)	K (±10%), M (±20%)		Z (-20/+80%)
Rated voltage (WVDC)	6.3V to 3000V			
Operating temperature	-55 to +125℃	-55 to +125℃	-55 to +85℃	-25 to +85 ℃
Capacitance characteristic	±30ppm	±15%	±15%	+30/-80%
Termination	Ni/Sn (lead-free termination)			

* Measured at the condition of 30~70% related humidity.
NP0: Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap≤1000pF and 1.0±0.2Vrms, 1.0kHz±10% for Cap>1000pF, 25℃ at ambient temperature
X7R, X5R: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 25℃ am bient temperature.
Y5V: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 20℃ ambient temperature.
** Preconditioning for Class II MLCC: Perform a heat treatment at 150±10℃ for 1 hour, then leave in a mbient condition for 24±2 hours before measurement.

Copyright © by Walsin Technology Corporation. | All rights reserved.

7. CAPACITANCE RANGE (NP0 Dielectric)

NP0 Dielectric 0402, 0603 Sizes

DIELECTRIC		NP0												
SIZE		0402					0603							
RATED VOLTAGE (VDC)		10	16	25	50	100	10	16	25	50	100	200	250
Capacitance	0.1pF (0R1)	E	E	E	E								
	0.2pF (0R2)	E	E	E	E								
	0.3pF (0R3)	E	E	E	E		S	S	S	S			
	0.4pF (0R4)	E	E	E	E		S	S	S	S			
	0.5pF (0R5)	E	E	E	E	E	S	S	S	S	S	S	S
	0.6pF (0R6)	E	E	E	E	E	S	S	S	S	S	S	S
	0.7pF (0R7)	E	E	E	E	E	S	S	S	S	S	S	S
	0.8pF (0R8)	E	E	E	E	E	S	S	S	S	S	S	S
	0.9pF (0R9)	E	E	E	E	E	S	S	S	S	S	S	S
	1.0pF (1R0)	E	E	E	E	E	S	S	S	S	S	S	S
	1.2pF (1R2)	E	E	E	E	E	S	S	S	S	S	S	S
	1.5pF (1R5)	E	E	E	E	E	S	S	S	S	S	S	S
	1.8pF (1R8)	E	E	E	E	E	S	S	S	S	S	S	S
	2.2pF (2R2)	E	E	E	E	E	S	S	S	S	S	S	S
	2.7pF (2R7)	E	E	E	E	E	S	S	S	S	S	S	S
	3.3pF (3R3)	E	E	E	E	E	S	S	S	S	S	S	S
	3.9pF (3R9)	E	E	E	E	E	S	S	S	S	S	S	S
	4.7pF (4R7)	E	E	E	E	E	S	S	S	S	S	S	S
	5.6pF (5R6)	E	E	E	E	E	S	S	S	S	S	S	S
	6.8pF (6R8)	E	E	E	E	E	S	S	S	S	S	S	S
	8.2pF (8R2)	E	E	E	E	E	S	S	S	S	S	S	S
	10pF (100)	E	E	E	E	E	S	S	S	S	S	S	S
	12pF (120)	E	E	E	E	E	S	S	S	S	S	S	S
	15pF (150)	E	E	E	E	E	S	S	S	S	S	S	S
	18pF (180)	E	E	E	E	E	S	S	S	S	S	S	S
	22pF (220)	E	E	E	E	E	S	S	S	S	S	S	S
	27pF (270)	E	E	E	E	E	S	S	S	S	S	S	S
	33pF (330)	E	E	E	E	E	S	S	S	S	S	S	S
	39pF (390)	E	E	E	E	E	S	S	S	S	S	S	S
	47pF (470)	E	E	E	E	E	S	S	S	S	S	S	S
	56pF (560)	E	E	E	E	E	S	S	S	S	S	S	S
	68pF (680)	E	E	E	E	E	S	S	S	S	S	S	S
	82pF (820)	E	E	E	E	E	S	S	S	S	S	S	S
	100pF (101)	E	E	E	E	E	S	S	S	S	S	S	S
	120pF (121)	E	E	E	E	E	S	S	S	S	S	S	S
	150pF (151)	E	E	E	E	E	S	S	S	S	S	S	S
	180pF (181)	E	E	E	E	E	S	S	S	S	S	S	S
	220pF (221)	E	E	E	E	E	S	S	S	S	S	S	S
	270pF (271)	E	E	E	E		S	S	S	S	S	X	X
	330pF (331)	E	E	E	E		S	S	S	S	S	X	X
	390pF (391)	E	E	E	E		S	S	S	S	S	X	X
	470pF (471)	E	E	E	E		S	S	S	S	S	X	X
	560pF (561)	E	E	E	E		S	S	S	S	S		
	680pF (681)	E	E	E	E		S	S	S	S	S		
	820pF (821)	E	E	E	E		S	S	S	S	S		
	1,000pF (102)	E	E	E	E		S	S	S	S	S		
	1,200pF (122)						X	X	X	X			
	1,500pF (152)						X	X	X	X			
	1,800pF (182)						X	X	X	X			
	2,200pF (222)						X	X	X	X			
	2,700pF (272)						X	X	X	X			
	3,300pF (332)						X	X	X	X			
	3,900pF (392)												
	4,700pF (472)												
	5,600pF (562)												
	6,800pF (682)												
	8,200pF (822)												
	0.010uF (103)												
	0.012uF (123)												

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

NP0 Dielectric 0805 Size

DIELECTRIC		NP0									
SIZE		0805									
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000
Capacitance	0.5pF (0R5)	A	A	A	A	A	A	A	A	A	D
	0.6pF (0R6)	A	A	A	A	A	A	A	A	A	D
	0.7pF (0R7)	A	A	A	A	A	A	A	A	A	D
	0.8pF (0R8)	A	A	A	A	A	A	A	A	A	D
	0.9pF (0R9)	A	A	A	A	A	A	A	A	A	D
	1.0pF (1R0)	A	A	A	A	A	A	A	A	A	D
	1.2pF (1R2)	A	A	A	A	A	A	A	A	A	D
	1.5pF (1R5)	A	A	A	A	A	A	A	A	A	D
	1.8pF (1R8)	A	A	A	A	A	A	A	A	A	D
	2.2pF (2R2)	A	A	A	A	A	A	A	A	A	D
	2.7pF (2R7)	A	A	A	A	A	A	A	A	A	D
	3.3pF (3R3)	A	A	A	A	A	A	A	A	A	D
	3.9pF (3R9)	A	A	A	A	A	A	A	A	A	D
	4.7pF (4R7)	A	A	A	A	A	A	A	A	A	D
	5.6pF (5R6)	A	A	A	A	A	A	A	A	A	D
	6.8pF (6R8)	A	A	A	A	A	A	A	A	A	D
	8.2pF (8R2)	A	A	A	A	A	A	A	A	A	D
	10pF (100)	A	A	A	A	A	A	A	A	A	D
	12pF (120)	A	A	A	A	A	A	A	A	A	D
	15pF (150)	A	A	A	A	A	A	A	A	A	D
	18pF (180)	A	A	A	A	A	A	A	A	A	D
	22pF (220)	A	A	A	A	A	A	A	A	A	D
	27pF (270)	A	A	A	A	A	A	A	A	A	D
	33pF (330)	A	A	A	A	A	A	A	A	A	D
	39pF (390)	A	A	A	A	A	A	A	A	A	D
	47pF (470)	A	A	A	A	A	A	A	A	A	D
	56pF (560)	A	A	A	A	A	A	A	A	A	D
	68pF (680)	A	A	A	A	A	A	A	A	A	D
	82pF (820)	A	A	A	A	A	A	A	B	B	D
	100pF (101)	A	A	A	A	A	A	B	B	B	D
	120pF (121)	A	A	A	A	A	A	B	D	D	D
	150pF (151)	A	A	A	A	A	B	D	D	D	D
	180pF (181)	A	A	A	A	A	B	D	D	D	D
	220pF (221)	A	A	A	A	A	D	D	D	D	D
	270pF (271)	A	A	A	A	A	D	D	D	D	D
	330pF (331)	A	A	A	A	A	D	D	D	D	D
	390pF (391)	B	B	B	B	B	D	D	D	D	D
	470pF (471)	B	B	B	B	B	D	D	I	I	
	560pF (561)	B	B	B	B	B	D	D	I	I	
	680pF (681)	B	B	B	B	B	D	D	I	I	
	820pF (821)	B	B	B	B	B	D	D	I	I	
	1,000pF (102)	B	B	B	B	B	D	D	I	I	
	1,200pF (122)	B	B	B	B	B	D	D			
	1,500pF (152)	B	B	B	B	B	D	D			
	1,800pF (182)	B	B	B	B	B	D	D			
	2,200pF (222)	B	B	B	B	B	D	D			
	2,700pF (272)	D	D	D	D	D					
	3,300pF (332)	D	D	D	D	D					
	3,900pF (392)	D	D	D	D	D					
	4,700pF (472)	D	D	D	D	D					
	5,600pF (562)	D	D	D	D	D					
	6,800pF (682)	D	D	D	D	D					
	8,200pF (822)	D	D	D	D						
	0.010μF (103)	D	D	D	D						

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

NP0 Dielectric 1206 Size

DIELECTRIC		NP0											
SIZE		1206											
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000	1500	2000
Capacitance	1.0pF (1R0)												
	1.2pF (1R2)	B	B	B	B	B							
	1.5pF (1R5)	B	B	B	B	B	B	B	B	B	B	B	B
	1.8pF (1R8)	B	B	B	B	B	B	B	B	B	B	B	B
	2.2pF (2R2)	B	B	B	B	B	B	B	B	B	B	B	B
	2.7pF (2R7)	B	B	B	B	B	B	B	B	B	B	B	B
	3.3pF (3R3)	B	B	B	B	B	B	B	B	B	B	B	B
	3.9pF (3R9)	B	B	B	B	B	B	B	B	B	B	B	B
	4.7pF (4R7)	B	B	B	B	B	B	B	B	B	B	B	B
	5.6pF (5R6)	B	B	B	B	B	B	B	B	B	B	B	B
	6.8pF (6R8)	B	B	B	B	B	B	B	B	B	B	B	B
	8.2pF (8R2)	B	B	B	B	B	B	B	B	B	B	B	B
	10pF (100)	B	B	B	B	B	B	B	B	B	B	B	B
	12pF (120)	B	B	B	B	B	B	B	B	B	B	B	B
	15pF (150)	B	B	B	B	B	B	B	B	B	B	B	B
	18pF (180)	B	B	B	B	B	B	B	B	B	B	B	B
	22pF (220)	B	B	B	B	B	B	B	B	B	B	B	B
	27pF (270)	B	B	B	B	B	B	B	B	B	B	B	B
	33pF (330)	B	B	B	B	B	B	B	B	B	B	C	C
	39pF (390)	B	B	B	B	B	B	B	B	B	B	C	C
	47pF (470)	B	B	B	B	B	B	B	B	B	C	C	C
	56pF (560)	B	B	B	B	B	B	B	B	B	C	D	D
	68pF (680)	B	B	B	B	B	B	B	B	B	C	D	D
	82pF (820)	B	B	B	B	B	B	B	B	B	D	D	D
	100pF (101)	B	B	B	B	B	B	B	B	B	D	D	D
	120pF (121)	B	B	B	B	B	B	B	B	B	D	G	G
	150pF (151)	B	B	B	B	B	B	B	B	B	D	G	G
	180pF (181)	B	B	B	B	B	B	B	B	B	G	G	G
	220pF (221)	B	B	B	B	B	B	B	B	B	G	G	G
	270pF (271)	B	B	B	B	B	B	C	C	C	G	P	P
	330pF (331)	B	B	B	B	B	B	C	C	C	G	P	P
	390pF (391)	B	B	B	B	B	B	C	C	C	G	P	P
	470pF (471)	B	B	B	B	B	C	C	C	C	G		
	560pF (561)	B	B	B	B	B	C	D	D	D	G		
	680pF (681)	B	B	B	B	B	C	D	D	D	G		
	820pF (821)	B	B	B	B	B	C	G	G	G	G		
	1,000pF (102)	B	B	B	B	B	C	G	G	G	G		
	1,200pF (122)	B	B	B	B	B	C	G	G	G			
	1,500pF (152)	B	B	B	B	B	D	G	G	G			
	1,800pF (182)	B	B	B	B	B	D	G	G	G			
	2,200pF (222)	B	B	B	B	B	D	G	G	G			
	2,700pF (272)	B	B	B	B	B	D	G	G	G			
	3,300pF (332)	B	B	B	B	B	D	G	G	G			
	3,900pF (392)	B	B	B	B	B	D	G	G	G			
	4,700pF (472)	B	B	B	B	B	D	G	G	G			
	5,600pF (562)	B	B	B	B	B							
	6,800pF (682)	C	C	C	C	C							
	8,200pF (822)	D	D	D	D	D							
	0.010μF (103)	D	D	D	D	D							
	0.012μF (123)	P	P	P	P	P							
	0.015μF (153)	P	P	P	P	P							
	0.018μF (183)	P	P	P	P	P							
	0.022μF (223)	P	P	P	P	P							
	0.027μF (273)	P	P	P	P								
	0.033μF (333)	P	P	P	P								
	0.039μF (393)	P	P	P	P								

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

NP0 Dielectric 1210 Size

DIELECTRIC		NP0											
SIZE		1210											
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000	1500	2000
Capacitance	10pF (100)	C	C	C	C	C	C	C	C	C	C	C	C
	12pF (120)	C	C	C	C	C	C	C	C	C	C	C	C
	15pF (150)	C	C	C	C	C	C	C	C	C	C	C	C
	18pF (180)	C	C	C	C	C	C	C	C	C	C	C	C
	22pF (220)	C	C	C	C	C	C	C	C	C	C	C	C
	27pF (270)	C	C	C	C	C	C	C	C	C	C	C	C
	33pF (330)	C	C	C	C	C	C	C	C	C	C	C	C
	39pF (390)	C	C	C	C	C	C	C	C	C	C	C	C
	47pF (470)	C	C	C	C	C	C	C	C	C	C	C	C
	56pF (560)	C	C	C	C	C	C	C	C	C	C	D	D
	68pF (680)	C	C	C	C	C	C	C	C	C	C	D	D
	82pF (820)	C	C	C	C	C	C	C	C	C	C	D	D
	100pF (101)	C	C	C	C	C	C	C	C	C	D	D	D
	120pF (121)	C	C	C	C	C	C	C	C	C	D	D	D
	150pF (151)	C	C	C	C	C	C	C	C	C	D	G	G
	180pF (181)	C	C	C	C	C	C	C	C	C	D	G	G
	220pF (221)	C	C	C	C	C	C	C	C	C	G	G	G
	270pF (271)	C	C	C	C	C	C	C	C	C	G	K	K
	330pF (331)	C	C	C	C	C	C	C	C	C	G	K	K
	390pF (391)	C	C	C	C	C	C	C	C	C	G	M	M
	470pF (471)	C	C	C	C	C	C	C	C	C	G	M	M
	560pF (561)	C	C	C	C	C	C	C	C	C	G		
	680pF (681)	C	C	C	C	C	C	C	C	C	G		
	820pF (821)	C	C	C	C	C	C	C	C	C	G		
	1,000pF (102)	C	C	C	C	C	D	D	D	D	G		
	1,200pF (122)	C	C	C	C	C	D	D	D	D	G		
	1,500pF (152)	C	C	C	C	C	D	D	D	D	K		
	1,800pF (182)	C	C	C	C	C	D	D	D	D	M		
	2,200pF (222)	C	C	C	C	C	D	D	D	D	M		
	2,700pF (272)	C	C	C	C	C	D	D	D	D	M		
	3,300pF (332)	C	C	C	C	C	D	D	D	D	M		
	3,900pF (392)	C	C	C	C	C	D	D	D	D	M		
	4,700pF (472)	C	C	C	C	C	G	G					
	5,600pF (562)	C	C	C	C	C	G	G					
	6,800pF (682)	C	C	C	C	C	G	G					
	8,200pF (822)	C	C	C	C	C	G	G					
	0.010μF (103)	C	C	C	C	C	G	G					
	0.012μF (123)	D	D	D	D	D							
	0.015μF (153)	D	D	D	D	D							
	0.018μF (183)												
	0.022μF (223)												
	0.027μF (273)												
	0.033μF (333)												
	0.039μF (393)												
	0.047μF (473)												

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

NP0 Dielectric 1808 Size

DIELECTRIC		NP0					
SIZE		1808					
RATED VOLTAGE (VDC)		500	630	1000	1500	2000	3000
Capacitance	2.0pF (2R0)						
	2.2pF (2R2)	D	D	D	D	D	D
	2.7pF (2R7)	D	D	D	D	D	D
	3.3pF (3R3)	D	D	D	D	D	D
	3.9pF (3R9)	D	D	D	D	D	D
	4.7pF (4R7)	D	D	D	D	D	D
	5.6pF (5R6)	D	D	D	D	D	D
	6.8pF (6R8)	D	D	D	D	D	D
	8.2pF (8R2)	D	D	D	D	D	D
	10pF (100)	D	D	D	D	D	D
	12pF (120)	D	D	D	D	D	D
	15pF (150)	D	D	D	D	D	D
	18pF (180)	D	D	D	D	D	D
	22pF (220)	D	D	D	D	D	D
	27pF (270)	D	D	D	D	D	D
	33pF (330)	D	D	D	D	D	D
	39pF (390)	D	D	D	D	D	D
	47pF (470)	D	D	D	D	D	D
	56pF (560)	D	D	D	D	D	D
	68pF (680)	D	D	D	D	D	D
	82pF (820)	D	D	D	D	D	D
	100pF (101)	D	D	D	D	D	K
	120pF (121)	D	D	D	D	D	K
	150pF (151)	D	D	D	K	K	K
	180pF (181)	D	D	D	K	K	K
	220pF (221)	D	D	D	K	K	K
	270pF (271)	K	K	K	K	K	K
	330pF (331)	K	K	K	K	K	K
	390pF (391)	K	K	K	K	K	K
	470pF (471)	K	K	K	K	K	
	560pF (561)	K	K	K	K	K	
	680pF (681)	K	K	K	K	K	
	820pF (821)	K	K	K	D	D	
	1,000pF (102)	K	K	K	G	G	
	1,200pF (122)	K	K	G			
	1,500pF (152)	K	K	G			
	1,800pF (182)	K	K	K			
	2,200pF (222)	K	K	K			
	2,700pF (272)	K	K				
	3,300pF (332)	K	K				
	3,900pF (392)						

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

NP0 Dielectric 1812 Size

DIELECTRIC		NP0												
SIZE		1812												
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000	1500	2000	3000
Capacitance	10pF (100)	D	D	D	D	D	D	D	D	D	D	D	D	D
	12pF (120)	D	D	D	D	D	D	D	D	D	D	D	D	D
	15pF (150)	D	D	D	D	D	D	D	D	D	D	D	D	D
	18pF (180)	D	D	D	D	D	D	D	D	D	D	D	D	D
	22pF (220)	D	D	D	D	D	D	D	D	D	D	D	D	D
	27pF (270)	D	D	D	D	D	D	D	D	D	D	D	D	D
	33pF (330)	D	D	D	D	D	D	D	D	D	D	D	D	D
	39pF (390)	D	D	D	D	D	D	D	D	D	D	D	D	D
	47pF (470)	D	D	D	D	D	D	D	D	D	D	D	D	D
	56pF (560)	D	D	D	D	D	D	D	D	D	D	D	D	D
	68pF (680)	D	D	D	D	D	D	D	D	D	D	D	D	D
	82pF (820)	D	D	D	D	D	D	D	D	D	D	D	D	D
	100pF (101)	D	D	D	D	D	D	D	D	D	D	D	D	D
	120pF (121)	D	D	D	D	D	D	D	D	D	D	D	D	D
	150pF (151)	D	D	D	D	D	D	D	D	D	D	D	D	D
	180pF (181)	D	D	D	D	D	D	D	D	D	D	D	D	K
	220pF (221)	D	D	D	D	D	D	D	D	D	D	D	D	K
	270pF (271)	D	D	D	D	D	D	D	D	D	D	K	K	K
	330pF (331)	D	D	D	D	D	D	D	D	D	D	K	K	K
	390pF (391)	D	D	D	D	D	D	D	D	D	D	K	K	K
	470pF (471)	D	D	D	D	D	D	D	D	D	K	K	K	K
	560pF (561)	D	D	D	D	D	D	D	D	D	K	K	K	
	680pF (681)	D	D	D	D	D	D	D	D	D	K	K	K	
	820pF (821)	D	D	D	D	D	D	D	D	D	K	K	K	
	1,000pF (102)	D	D	D	D	D	D	D	D	D	K	K	K	
	1,200pF (122)	D	D	D	D	D	D	D	D	D	K			
	1,500pF (152)	D	D	D	D	D	D	D	D	D	K			
	1,800pF (182)	D	D	D	D	D	D	D	D	D	K			
	2,200pF (222)	D	D	D	D	D	D	D	D	D	K			
	2,700pF (272)	D	D	D	D	D	D	D	D	D	K			
	3,300pF (332)	D	D	D	D	D	D	D	D	D	K			
	3,900pF (392)	D	D	D	D	D	D	D	D	D	M			
	4,700pF (472)	D	D	D	D	D	D	D	D	D				
	5,600pF (562)	D	D	D	D	D	D	D	D	D				
	6,800pF (682)	D	D	D	D	D	D	D	D	D				
	8,200pF (822)	D	D	D	D	D			D	D				
	0.010μF (103)	D	D	D	D	D			D	D				
	0.012μF (123)	D	D	D	D	D			G	G				
	0.015μF (153)	D	D	D	D	D			G	G				
	0.018μF (183)	D	D	D	D	D			K	K				
	0.022μF (223)	D	D	D	D	D			K	K				
	0.027μF (273)	D	D	D	D	D								
	0.033μF (333)	D	D	D	D	D								
	0.039μF (393)													
	0.047μF (473)													

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

7-1. CAPACITANCE RANGE (X7R Dielectric)

0402, 0603 Sizes

DIELECTRIC		X7R											
SIZE		0402					0603						
RATED VOLTAGE (VDC)		10	16	25	50	100	10	16	25	50	100	200	250
Capacitance	100pF (101)	E	E	E	E	E	S	S	S	S	S	X	X
	120pF (121)	E	E	E	E	E	S	S	S	S	S	X	X
	150pF (151)	E	E	E	E	E	S	S	S	S	S	X	X
	180pF (181)	E	E	E	E	E	S	S	S	S	S	X	X
	220pF (221)	E	E	E	E	E	S	S	S	S	S	X	X
	270pF (271)	E	E	E	E	E	S	S	S	S	S	X	X
	330pF (331)	E	E	E	E	E	S	S	S	S	S	X	X
	390pF (391)	E	E	E	E	E	S	S	S	S	S	X	X
	470pF (471)	E	E	E	E	E	S	S	S	S	S	X	X
	560pF (561)	E	E	E	E	E	S	S	S	S	S	X	X
	680pF (681)	E	E	E	E	E	S	S	S	S	S	X	X
	820pF (821)	E	E	E	E	E	S	S	S	S	S	X	X
	1,000pF (102)	E	E	E	E	E	S	S	S	S	S	X	X
	1,200pF (122)	E	E	E	E	E	S	S	S	S	S	X	X
	1,500pF (152)	E	E	E	E	E	S	S	S	S	S	X	X
	1,800pF (182)	E	E	E	E	E	S	S	S	S	S	X	X
	2,200pF (222)	E	E	E	E	E	S	S	S	S	S	X	X
	2,700pF (272)	E	E	E	E	E	S	S	S	S	S	X	X
	3,300pF (332)	E	E	E	E	E	S	S	S	S	S	X	X
	3,900pF (392)	E	E	E	E	E	S	S	S	S	S	X	X
	4,700pF (472)	E	E	E	E	E	S	S	S	S	S	X	X
	5,600pF (562)	E	E	E	E		S	S	S	S	S	X	X
	6,800pF (682)	E	E	E	E		S	S	S	S	S	X	X
	8,200pF (822)	E	E	E	E		S	S	S	S	S	X	X
	0.010μF (103)	E	E	E	E		S	S	S	S	S	X	X
	0.012μF (123)	E	E	E			S	S	S	S	X		
	0.015μF (153)	E	E	E			S	S	S	S	X		
	0.018μF (183)	E	E	E			S	S	S	S	X		
	0.022μF (223)	E	E	E			S	S	S	S	X		
	0.027μF (273)	E	E	E			S	S	S	S	X		
	0.033μF (333)	E	E	E			S	S	S	X	X		
	0.039μF (393)	E	E	E			S	S	S	X	X		
	0.047μF (473)	E	E	E			S	S	S	X	X		
	0.056μF (563)	E	E				S	S	S	X	X		
	0.068μF (683)	E	E				S	S	S	X	X		
	0.082μF (823)	E	E				S	S	S	X	X		
	0.10μF (104)	E	E				S	S	S	X	X		
	0.12μF (124)						S	S	X				
	0.15μF (154)						S	S	X				
	0.18μF (184)						S	S	X				
	0.22μF (224)						S	S	X	X			
	0.27μF (274)						X	X	X				
	0.33μF (334)						X	X	X				
	0.39μF (394)						X	X	X				
	0.47μF (474)						X	X	X				
	0.56μF (564)						X	X					
	0.68μF (684)						X	X					
	0.82μF (824)						X	X					
	1.0μF (105)						X	X	X				
	1.5μF (155)												
	2.2μF (225)												
	4.7μF (475)												

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

X7R Dielectric 0805 Size

DIELECTRIC		X7R									
SIZE		0805									
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000
Capacitance	100pF (101)	D	D	D	D	D	D	D	B	B	B
	120pF (121)	D	D	D	D	D	D	D	B	B	B
	150pF (151)	D	D	D	D	D	D	D	B	B	B
	180pF (181)	D	D	D	D	D	D	D	B	B	B
	220pF (221)	D	D	D	D	D	D	D	B	B	B
	270pF (271)	D	D	D	D	D	D	D	B	B	B
	330pF (331)	D	D	D	D	D	D	D	B	B	B
	390pF (391)	D	D	D	D	D	D	D	B	B	B
	470pF (471)	D	D	D	D	D	D	D	B	B	B
	560pF (561)	D	D	D	D	D	D	D	B	B	B
	680pF (681)	D	D	D	D	D	D	D	B	B	B
	820pF (821)	D	D	D	D	D	D	D	B	B	B
	1,000pF (102)	D	D	D	D	D	D	D	B	B	B
	1,200pF (122)	D	D	D	D	D	D	D	B	B	B
	1,500pF (152)	D	D	D	D	D	D	D	B	B	D
	1,800pF (182)	D	D	D	D	D	D	D	B	B	D
	2,200pF (222)	D	D	D	D	D	D	D	B	B	D
	2,700pF (272)	D	D	D	D	D	D	D	B	B	
	3,300pF (332)	D	D	D	D	D	D	D	B	B	
	3,900pF (392)	D	D	D	D	D	D	D	B	B	
	4,700pF (472)	D	D	D	D	D	D	D	D	D	
	5,600pF (562)	D	D	D	D	D	D	D	D	D	
	6,800pF (682)	D	D	D	D	D	D	D	D	D	
	8,200pF (822)	D	D	D	D	D	D	D	D	D	
	0.010μF (103)	D	D	D	D	D	D	D	D	D	
	0.012μF (123)	D	D	D	D	D	D	D	D	D	
	0.015μF (153)	D	D	D	D	D	D	D	D	D	
	0.018μF (183)	D	D	D	D	D	D	D	D	D	
	0.022μF (223)	D	D	D	D	D	D	D	D	D	
	0.027μF (273)	D	D	D	D	D	D	D	D	D	
	0.033μF (333)	D	D	D	D	D	D	D	D		
	0.039μF (393)	D	D	D	D	D	D	D			
	0.047μF (473)	D	D	D	D	D	D	D			
	0.056μF (563)	D	D	D	D	D	D	D			
	0.068μF (683)	D	D	D	D	D	D	D			
	0.082μF (823)	D	D	D	D	D	D				
	0.10μF (104)	D	D	D	D	D	D				
	0.12μF (124)	D	D	D	D	I					
	0.15μF (154)	D	D	D	D	I					
	0.18μF (184)	D	D	D	D	I					
	0.22μF (224)	D	D	D	D	I					
	0.27μF (274)	I	I	I	I						
	0.33μF (334)	I	I	I	I						
	0.39μF (394)	I	I	I	I						
	0.47μF (474)	I	I	I	I						
	0.56μF (564)	I	I	I							
	0.68μF (684)	I	I	I							
	0.82μF (824)	I	I	I							
	1.0μF (105)	I	I	I	I						
	1.5μF (155)	I	I	I							
	2.2μF (225)	I	I	I							
	4.7μF (475)		I								
	10μF (106)										

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

X7R Dielectric 1206 Size

DIELECTRIC		X7R													
SIZE		1206													
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	400	450	500	630	1000	1500	2000
Capacitance	100pF (101)						D	D			D	D	D	D	D
	120pF (121)						D	D			D	D	D	D	D
	150pF (151)	D	D	D	D	D	D	D			D	D	D	D	D
	180pF (181)	D	D	D	D	D	D	D			D	D	D	D	D
	220pF (221)	D	D	D	D	D	D	D			D	D	D	D	D
	270pF (271)	D	D	D	D	D	D	D			D	D	D	D	D
	330pF (331)	D	D	D	D	D	D	D			D	D	D	D	D
	390pF (391)	D	D	D	D	D	D	D			D	D	D	D	D
	470pF (471)	D	D	D	D	D	D	D			D	D	D	D	D
	560pF (561)	D	D	D	D	D	D	D			D	D	D	D	D
	680pF (681)	D	D	D	D	D	D	D			D	D	D	D	D
	820pF (821)	D	D	D	D	D	D	D			D	D	D	G	G
	1,000pF (102)	D	D	D	D	D	D	D			D	D	D	G	G
	1,200pF (122)	D	D	D	D	D	D	D			D	D	D	G	G
	1,500pF (152)	D	D	D	D	D	D	D			D	D	D	G	G
	1,800pF (182)	D	D	D	D	D	D	D			D	D	D	G	G
	2,200pF (222)	D	D	D	D	D	D	D			D	D	D	G	G
	2,700pF (272)	D	D	D	D	D	D	D			D	D	D	G	G
	3,300pF (332)	D	D	D	D	D	D	D			D	D	D	G	G
	3,900pF (392)	D	D	D	D	D	D	D			D	D	D	G	
	4,700pF (472)	D	D	D	D	D	D	D			D	D	D	G	
	5,600pF (562)	D	D	D	D	D	D	D			D	D	D	G	
	6,800pF (682)	D	D	D	D	D	D	D			D	D	D	G	
	8,200pF (822)	D	D	D	D	D	D	D			D	D	D	G	
	0.010μF (103)	D	D	D	D	D	D	D			D	D	D	G	
	0.012μF (123)	D	D	D	D	D	D	D			D	D	G		
	0.015μF (153)	D	D	D	D	D	D	D			D	D	G		
	0.018μF (183)	D	D	D	D	D	D	D			D	D			
	0.022μF (223)	D	D	D	D	D	D	D			G	G			
	0.027μF (273)	D	D	D	D	D	D	D			G	G			
	0.033μF (333)	D	D	D	D	D	G	G			G	G			
	0.039μF (393)	D	D	D	D	D	G	G			G	G			
	0.047μF (473)	D	D	D	D	D	G	G			G	G			
	0.056μF (563)	D	D	D	D	D	G	G			G	G			
	0.068μF (683)	D	D	D	D	D	G	G	G	G					
	0.082μF (823)	D	D	D	D	D	G	G	G	G					
	0.10μF (104)	D	D	D	D	D	G	G	G	G					
	0.12μF (124)	D	D	D	D	D									
	0.15μF (154)	C	C	C	C	G									
	0.18μF (184)	C	C	C	C	G									
	0.22μF (224)	C	C	C	C	G									
	0.27μF (274)	C	C	C	D	G									
	0.33μF (334)	C	C	C	D	G									
	0.39μF (394)	C	C	J	P	G									
	0.47μF (474)	J	J	J	P	G									
	0.56μF (564)	J	J	J	P	P									
	0.68μF (684)	J	J	J	P	P									
	0.82μF (824)	J	J	J	P	P									
	1.0μF (105)	J	J	J	P	P									
	1.5μF (155)	J	J	P											
	2.2μF (225)	J	J	P	P										
	3.3μF (335)	P	P	P											
	4.7μF (475)	P	P	P											
	10μF (106)	P	P	P											
	22μF (226)	P													
	47μF (476)														

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

X7R Dielectric 1210 Size

DIELECTRIC		X7R														
SIZE		1210														
RATED VOLTAGE (VDC)		6.3	10	16	25	50	100	200	250	400	450	500	630	1000	1500	2000
Capacitance	100pF (101)											D	D	D	D	D
	120pF (121)											D	D	D	D	D
	150pF (151)											D	D	D	D	D
	180pF (181)											D	D	D	D	D
	220pF (221)											D	D	D	D	D
	270pF (271)											D	D	D	D	D
	330pF (331)											D	D	D	D	D
	390pF (391)											D	D	D	D	D
	470pF (471)											D	D	D	D	D
	560pF (561)											D	D	D	D	D
	680pF (681)											D	D	D	D	D
	820pF (821)											D	D	D	D	D
	1,000pF (102)		C	C	C	C	C	C	C			D	D	D	D	D
	1,200pF (122)		C	C	C	C	C	C	C			D	D	D	M	M
	1,500pF (152)		C	C	C	C	C	C	C			D	D	D	M	M
	1,800pF (182)		C	C	C	C	C	C	C			D	D	D	M	M
	2,200pF (222)		C	C	C	C	C	C	C			D	D	D	M	M
	2,700pF (272)		C	C	C	C	C	C	C			D	D	D	M	M
	3,300pF (332)		C	C	C	C	C	C	C			D	D	D	M	M
	3,900pF (392)		C	C	C	C	C	C	C			D	D	G	M	M
	4,700pF (472)		C	C	C	C	C	C	C			D	D	G	M	M
	5,600pF (562)		C	C	C	C	C	C	C			D	D	G	M	M
	6,800pF (682)		C	C	C	C	C	C	C			D	D	G	M	M
	8,200pF (822)		C	C	C	C	C	C	C			D	D	G	M	M
	0.010μF (103)		C	C	C	C	C	C	C			D	D	G		
	0.012μF (123)		C	C	C	C	C	C	C			D	D	G		
	0.015μF (153)		C	C	C	C	C	C	C			D	D	G		
	0.018μF (183)		C	C	C	C	C	C	C			D	D	G		
	0.022μF (223)		C	C	C	C	C	C	C			D	D	G		
	0.027μF (273)		C	C	C	C	C	C	C			G	G	G		
	0.033μF (333)		C	C	C	C	C	C	C			G	G	G		
	0.039μF (393)		C	C	C	C	C	C	C			G	G	K		
	0.047μF (473)		C	C	C	C	C	D	D			G	G	M		
	0.056μF (563)		C	C	C	C	C	D	D			G	G			
	0.068μF (683)		C	C	C	C	C	G	G			K	K			
	0.082μF (823)		C	C	C	C	C	G	G			K	K			
	0.10μF (104)		C	C	C	C	C	G	G			K	K			
	0.12μF (124)		C	C	C	C	C	G	G	M	M					
	0.15μF (154)		C	C	C	C	D	M	M	M	M					
	0.18μF (184)		C	C	C	C	D	M	M	M	M					
	0.22μF (224)		C	C	C	C	D	M	M	M	M					
	0.27μF (274)		C	C	C	C	G	M	M	M	M					
	0.33μF (334)		C	C	C	D	G	M	M	M	M					
	0.39μF (394)		C	C	C	D	M	M	M							
	0.47μF (474)		C	C	C	D	M	M	M							
	0.56μF (564)		D	D	D	D	M	M	M							
	0.68μF (684)		D	D	D	D	K	M	M							
	0.82μF (824)		D	D	D	D	K									
	1.0μF (105)		D	D	D	D	K									
	1.5μF (155)			K	G	M	M									
	2.2μF (225)			K	G	M	M									
	3.3μF (335)			K	G	M										
	4.7μF (475)		K	K	K											
	10μF (106)		K	K	M	M										
	22μF (226)			M												
	47μF (476)	M														

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

X7R Dielectric 1808, 1812 Sizes

DIELECTRIC		X7R																		
SIZE		1808						1812												
RATED VOLTAGE (VDC)		500	630	1000	1500	2000	3000	10	16	25	50	100	200	250	500	630	1000	1500	2000	3000
Capacitance	100pF (101)																			
	120pF (121)																			
	150pF (151)	D	D	D	D	D	D													
	180pF (181)	D	D	D	D	D	D													
	220pF (221)	D	D	D	D	D	D													
	270pF (271)	D	D	D	D	D	D						D	D	D	D	D	D	D	K
	330pF (331)	D	D	D	D	D	K						D	D	D	D	D	D	D	K
	390pF (391)	D	D	D	D	D	K						D	D	D	D	D	D	D	K
	470pF (471)	D	D	D	D	D	K						D	D	D	D	D	D	D	K
	560pF (561)	D	D	D	D	D	K						D	D	D	D	D	D	D	K
	680pF (681)	D	D	D	D	D	K						D	D	D	D	D	D	D	K
	820pF (821)	D	D	D	D	D	K						D	D	D	D	D	D	D	K
	1,000pF (102)	D	D	D	K	K	K	D	D	D	D	D	D	D	D	D	D	D	D	K
	1,200pF (122)	D	D	D	K	K	K	D	D	D	D	D	D	D	D	D	D	D	D	K
	1,500pF (152)	D	D	D	K	K	K	D	D	D	D	D	D	D	D	D	D	D	D	K
	1,800pF (182)	D	D	D	K	K	K	D	D	D	D	D	D	D	D	D	D	G	G	M
	2,200pF (222)	D	D	D	K	K		D	D	D	D	D	D	D	D	D	D	G	G	M
	2,700pF (272)	D	D	D	K	K		D	D	D	D	D	D	D	D	D	D	G	G	M
	3,300pF (332)	D	D	D	K	K		D	D	D	D	D	D	D	D	D	D	K	K	M
	3,900pF (392)	D	D	D	K	K		D	D	D	D	D	D	D	D	D	D	K	K	M
	4,700pF (472)	D	D	D	K	K		D	D	D	D	D	D	D	D	D	D	K	K	M
	5,600pF (562)	K	K	K	K	K		D	D	D	D	D	D	D	D	D	D	M	M	M
	6,800pF (682)	K	K	K	K	K		D	D	D	D	D	D	D	D	D	D	M	M	M
	8,200pF (822)	K	K	K				D	D	D	D	D	D	D	D	D	D	M	M	
	0.010μF (103)	K	K	K				D	D	D	D	D	D	D	D	D	D	M	M	
	0.012μF (123)	K	K	K				D	D	D	D	D	D	D	D	D	K			
	0.015μF (153)	K	K	K				D	D	D	D	D	D	D	D	D	K			
	0.018μF (183)	K	K	K				D	D	D	D	D	D	D	D	D	M			
	0.022μF (223)	K	K	K				D	D	D	D	D	D	D	D	D	M			
	0.027μF (273)	K	K	K				D	D	D	D	D	D	D	D	D	M			
	0.033μF (333)	K	K	K				D	D	D	D	D	D	D	D	D	M			
	0.039μF (393)	K	K	K				D	D	D	D	D	D	D	D	D	M			
	0.047μF (473)	K	K	K				D	D	D	D	D	D	D	D	D	M			
	0.056μF (563)	K	K	K				D	D	D	D	D	D	D	K	K	M			
	0.068μF (683)	K	K					D	D	D	D	D	D	D	K	K	M			
	0.082μF (823)	K	K					D	D	D	D	D	D	D	K	K	M			
	0.10μF (104)							D	D	D	D	D	D	D	K	K	M			
	0.12μF (124)							D	D	D	D	D	D	D	M	M				
	0.15μF (154)							D	D	D	D	D	K	K	M	M				
	0.18μF (184)							D	D	D	D	D	K	K	M	M				
	0.22μF (224)							D	D	D	D	D	K	K	M	M				
	0.27μF (274)							D	D	D	D	D	K	K	M					
	0.33μF (334)							D	D	D	D	D	K	K	M					
	0.39μF (394)							D	D	D	D	D	K	K	M					
	0.47μF (474)							D	D	D	D	K	K	K	M					
	0.56μF (564)							D	D	D	D	K	M	M						
	0.68μF (684)							D	D	D	K	K	M	M						
	0.82μF (824)							D	D	D	K	K	M	M						
	1.0μF (105)							D	D	D	K	K	M	M						
	1.5μF (155)											K								
	2.2μF (225)										M	M								
	3.3μF (335)																			
	4.7μF (475)																			

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

7-2. CAPACITANCE RANGE (X5R Dielectric)

Dielectric		X5R																				
Size		0402				0603					0805					1206					1210				
Rated Voltage (VDC)		6.3	10	16	25	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	0.027μF (273)			E																					
	0.033μF (333)			E																					
	0.039μF (393)			E																					
	0.047μF (473)			E																					
	0.056μF (563)		E	E																					
	0.068μF (683)		E	E																					
	0.082μF (823)	E	E	E																					
	0.10μF (104)	E	E	E	E																				
	0.15μF (154)	E	E	E	E																				
	0.22μF (224)	E	E	E	E			X	X																
	0.27uF (274)						X	X	X																
	0.33μF (334)	E	E			X	X	X	X																
	0.39μF (394)						X	X	X																
	0.47μF (474)	E	E				X	X	X																
	0.68μF (684)	E	E			X	X	X	X																
	0.82uF (824)					X	X	X																	
	1.0μF (105)					X	X	X	X																
	1.5μF (155)					X					I	I	I	I			J	J				K	K		
	2.2μF (225)					X	X	X			I	I	I	I			J	J	P			K	K		
	3.3μF (335)					X					I	I	I	I			P	P	P						
	4.7μF (475)					X										P	P	P	P			K	K	K	
	6.8uF (685)															P	P								
	10μF (106)															P	P	P	P		K	K	K		
	22μF (226)																								

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

7-3. CAPACITANCE RANGE (Y5V Dielectric)

DIELECTRIC		Y5V								
SIZE		0402					0603			
RATED VOLTAGE		6.3	10	16	25	50	10	16	25	50
Capacitance	0.010μF (103)		E	E	E	E	S	S	S	S
	0.015μF (153)		E	E	E	E	S	S	S	S
	0.022μF (223)		E	E	E	E	S	S	S	S
	0.033μF (333)		E	E	E	E	S	S	S	S
	0.047μF (473)		E	E	E		S	S	S	S
	0.068μF (683)		E	E	E		S	S	S	S
	0.10μF (104)		E	E	E		S	S	S	S
	0.15μF (154)		E				S	S	S	S
	0.22μF (224)	E	E				S	S	S	S
	0.33μF (334)	E	E				S	S	S	
	0.47μF (474)						S	S		
	0.68μF (684)						S	X		
	1.0μF (105)						S	X		
	2.2μF (225)						S			
	4.7μF (475)									

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

8. PACKAGING STYLE AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0402 (1005)	0.50±0.20	E	10k	-	-	-
0603 (1608)	0.80±0.07	S	4k	15k	-	-
	0.80±0.30	X	4k	15k	-	-
0805 (2012)	0.60±0.10	A	4k	15k	-	-
	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
	1.25±0.30	I	-	-	3k	10k
1206 (3216)	0.80±0.10	B	4k	15k	-	-
	0.95±0.10	C	-	-	3k	10k
	1.15±0.15	J	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	10k
	1.60±0.50	P	-	-	2k	9k
1210 (3225)	0.95±0.10	C	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	-
	2.00±0.20	K	-	-	1k	6k
	2.50±0.50	M	-	-	1k	6k
1812 (4532)	1.25±0.10	D	-	-	1k	5k
	1.60±0.20	G	-	-	1k	-
	2.00±0.20	K	-	-	1k	-
	2.50±0.50	M	-	-	0.5k	3k

Unit: pieces

著作權所有 侵害必究
華新科技股份有限公司
PSA
PASSIVE SYSTEM ALLIANCE
Walsin Technology Corporation
COPYRIGHT © WALSIN TECHNOLOGY CORPORATION. ALL RIGHTS RESERVED.

Copyright © by Walsin Technology Corporation. | All rights reserved.

9. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

<table>
<tr><th>No.</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>1.</td><td>Visual and Mechanical</td><td>---</td><td>* No remarkable defect.
* Dimensions to conform to individual specification sheet.</td></tr>
<tr><td>2.</td><td>Capacitance</td><td>Class I: (NP0)
C≦1000pF, 1.0±0.2Vrms，1MHz±10%
C＞1000pF, 1.0±0.2Vrms，1KHz±10%
Class II: (X7R, X7E, X6S, X5R,X7S,Y5V)
C≦10μF, 1.0±0.2Vrms，1KHz±10% **
C＞10μF, 0.5±0.2Vrms，120Hz±20%

** Test condition: 0.5±0.2Vrms，1KHz±10%
X7R:
0805=106(6.3V), 0603/475(6.3V)
X5R:
0201≧224 (6.3V,10V,16V)#1,
0402≧475 (6.3V,16V), 0402≧225(10V),
0603=106 (6.3V,10V),
TT18X≧475(10V) , TT15X series
X6S:
0201/474(4V),0201≧104 (6.3V,10V#1),
0402≧225 (6.3V),
0402/475 (10V), 0603/106 (6.3V),
X7S:
0402/225(6.3V)

#1 Excluding
X5R/0201/105(6.3V);225(10V),
X6S/0201/104(10V)
(1.0±0.2Vrms，1KHz±10%)

*Before initial measurement (Class II only):
To apply de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.</td><td>* Shall not exceed the limits given in the detailed spec.</td></tr>
<tr><td>3.</td><td>Q/ D.F. (Dissipation Factor)</td><td></td><td>NP0: Cap≥30pF, Q≥1000; Cap<30pF,Q≥400+20C
X7R,X5R,X6S,X7S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="3">≧100V</td><td rowspan="3">≦2.5%</td><td>≦3%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦5%</td><td>0805＞0.1μF;0603≧0.068μF;1206>1μF;1210≧2.2μF;TT series</td></tr>
<tr><td>≦10%</td><td>0805＞0.22μF;1210≧3.3μF</td></tr>
<tr><td rowspan="3">50V</td><td rowspan="3">≦2.5%</td><td>≦3%</td><td>0201(50V);0603≧0.047μF;0805≧0.18μF;1206≧0.47μF</td></tr>
<tr><td>≦5%</td><td>0201≧0.01uF;1210≧4.7μF</td></tr>
<tr><td>≦10%</td><td>0402≧0.012μF; 0603>0.1μF; 0805≧1μF(0805/X7R>0.47μF);
1206≧2.2μF; 1210≧10μF; TT series</td></tr>
<tr><td>35V</td><td>≦3.5%</td><td>≦10%</td><td>0603≧1μF;0805≧2.2μF;1206≧2.2μF;1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF;0805≧1μF;1210≧10μF</td></tr>
<tr><td>≦7%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.1μF;0402≧0.10μF&(0402/X7R≧0.056μF);TT series;
0603≧0.47μF;0805≧2.2μF;1206≧4.7μF;1210≧22μF</td></tr>
<tr><td>≦12.5%</td><td>0402≧0.47μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF;0402≧0.033μF;0603≧0.15μF;
0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.1uF(0201/X7R≧0.022μF);0402≧0.22uF;TT series
0603≧0.68μF;0805≧2.2μF;1206≧4.7μF;1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.012μF;0402≧0.33μF(0402/X7R≧0.22μF);TT series
0603≧0.33μF;0805≧2.2μF;1206≧2.2μF;1210≧22μF;01R5</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF</td></tr>
<tr><td rowspan="2">6.3V</td><td rowspan="2">≦10%</td><td>≦15%</td><td>0201≧0.1μF;0402≧1μF(0402/X6S≧0.47μF);0603≧10μF;
0805≧4.7μF;1206≧47μF;1210≧100μF;TT series</td></tr>
<tr><td>≦20%</td><td>0402≧2.2μF</td></tr>
<tr><td>4V</td><td>≦15%</td><td>---</td><td>---</td></tr>
</table>
Y5V:
<table>
<tr><th>Rated vol.</th><th>D.F. ≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td rowspan="2">≧50V</td><td rowspan="2">≦5%</td><td>≦7%</td><td>0603≧0.1μF; 0805≧0.47μF; 1206≧4.7μF; TT series</td></tr>
<tr><td>≦12.5%</td><td>1210≧6.8μF</td></tr>
<tr><td>35V</td><td>≦7%</td><td>---</td><td>---</td></tr>
<tr><td rowspan="2">25V</td><td rowspan="2">≦5%</td><td>≦7%</td><td>0402≧0.047μF;0603≧0.1μF; 0805≧0.33μF;
1206≧1μF; 1210≧4.7μF</td></tr>
<tr><td>≦9%</td><td>0402≧0.068μF;0603≧0.47μF; 1206≧4.7μF;
1210≧22μF; TT series</td></tr>
<tr><td rowspan="2">16V
(C<1.0μF)</td><td rowspan="2">≦7%</td><td>≦9%</td><td>0402≧0.068μF; 0603≧0.68μF</td></tr>
<tr><td>≦12.5%</td><td>0402≧0.22μF</td></tr>
<tr><td>16V
(C≧1.0μF)</td><td>≦9%</td><td>≦12.5%</td><td>0603≧2.2μF; 0805≧3.3μF;1206≧10μF;
1210≧22μF; 1812≧47μF; TT series</td></tr>
<tr><td>10V</td><td>≦12.5%</td><td>≦20%</td><td>0402≧0.47μF</td></tr>
<tr><td>6.3V</td><td>≦20%</td><td>---</td><td>---</td></tr>
</table></td></tr>
<tr><td>4.</td><td>Dielectric Strength</td><td>*To apply voltage:
≦100V: 250% of rated voltage.
200V ~ 300V: 200% of rated voltage.
400V ~ 450V: 120% of rated voltage.
500V ~ 999V: 150% of rated voltage.
1000V ~ 3000V: 120% of rated voltage.
4000V: 110% of rated voltage.
*Duration: 1 to 5 sec.
Charge & discharge current less than 50mA.</td><td> No evidence of damage or flash over during test.</td></tr>
</table>

Copyright © by Walsin Technology Corporation. | All rights reserved.

<table>
<tr><th>No.</th><th>Item</th><th colspan="2">Test Condition</th><th>Requirements</th></tr>
<tr><td rowspan="3">5.</td><td rowspan="3">Insulation Resistance</td><td colspan="2" rowspan="2">To apply rated voltage for MAX. 120sec.</td><td>10GΩ or RxC≧500Ω-F whichever is smaller.
Class II (X7R, X7E, X5R,X6S,X7S,Y5V:)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R</td><td rowspan="6">10GΩ or RxC≧100 Ω-F whichever is smaller.</td></tr>
<tr><td>50V:0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V:0805≥2.2μF;1206≧2.2μF;1210≧10μF</td></tr>
<tr><td>25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1μF,0402≥0.22μF;0603≥1μF;
0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V ; 4V ; TT series; Size≥1812</td><td></td></tr>
</table>
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>All X6S items, All X7S items</td><td rowspan="9">RxC≧50 Ω-F.</td></tr>
<tr><td>100V: 1210≥3.3μF</td></tr>
<tr><td>50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF;1206≥10μF</td></tr>
<tr><td>35V: 0603≥1μF;</td></tr>
<tr><td>25V: 0201≥0.1μF; 0402≥2.2μF;0603≥10μF; 0805≥10μF;1206≥22μF</td></tr>
<tr><td>16V: 0603≥10μF; 0402≥1μF; 0201≥0.22μF</td></tr>
<tr><td>10V: 0201>0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF; TT21>4.7μF</td></tr>
<tr><td>6.3V: 0201≥0.1μF; 0603>4.7μF; 0805≥47μF;1206≥10μF; TT15>1.0μF</td></tr>
<tr><td>4V:0603≥22μF; 0805≥47μF; 1206≥100μF</td></tr>
</table></td></tr>
<tr><td>Rated voltage: 200~630V</td><td>To apply rated voltage (500V max.) for 60 sec.</td><td>≥10GΩ or RxC≥100Ω-F whichever is smaller</td></tr>
<tr><td>Rated voltage: >630V</td><td>To apply 500V for 60 sec.</td><td></td></tr>
</table>

華新科技股份有限公司 版權所有 侵害必究
PSA PASSIVE SYSTEM ALLIANCE
Walsin Technology Corporation
COPYRIGHT © WALSIN TECHNOLOGY CORPORATION. ALL RIGHTS RESERVED.

Copyright © by Walsin Technology Corporation. | All rights reserved.

<table>
<tr><th>No.</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>6.</td><td>Temperature Coefficient</td><td>With no electrical load.
<table>
<tr><td>T.C.</td><td>Operating Temp</td></tr>
<tr><td>NPO</td><td>-55~125℃ at 25℃</td></tr>
<tr><td>X7R</td><td>-55~125℃ at 25℃</td></tr>
<tr><td>X7S</td><td>-55 ~ 125℃ at 25℃</td></tr>
<tr><td>X5R</td><td>-55~ 85℃ at 25℃</td></tr>
<tr><td>X6S</td><td>-55~105℃ at 25℃</td></tr>
<tr><td>Y5V</td><td>-25~ 85℃ at 20℃</td></tr>
</table>
*Before initial measurement (Class II only):
To apply de-aging at 150℃ for 1hr then set for 24± 2 hrs at room temp.
* Measurement voltage for Class II:
<table>
<tr><td>01005</td><td>0201</td></tr>
<tr><td>Cap≤0.01μF: 0.5V</td><td>Cap<0.1μF:1V</td></tr>
<tr><td>Cap>0.01μF: 0.2V</td><td>0.1μF*≤Cap<1μF: 0.2V</td></tr>
<tr><td></td><td>Cap≥1μF: 0.1V</td></tr>
<tr><td></td><td>*0201X104/16V: 0.5V</td></tr>
<tr><td>0402</td><td>0603</td></tr>
<tr><td>Cap<1μF: 1V</td><td>Cap≤1μF: 1V</td></tr>
<tr><td>Cap=1μF: 0.5V</td><td>1μF<Cap≤4.7μF: 0.5V</td></tr>
<tr><td>1μF<Cap<10μF: 0.2V</td><td>Cap>4.7μF: 0.2V</td></tr>
<tr><td>Cap≥10μF: 0.1V</td><td></td></tr>
<tr><td>0805</td><td>1206/1210</td></tr>
<tr><td>Cap<10μF: 1V</td><td>Cap≤10μF: 1V</td></tr>
<tr><td>Cap=10μF: 0.5V</td><td>10μF<Cap≤100μF: 0.5V</td></tr>
<tr><td>Cap>10μF: 0.2V</td><td>Cap>100μF: 0.2V</td></tr>
</table></td><td>
<table>
<tr><td>T.C.</td><td>Capacitance Change</td></tr>
<tr><td>NPO</td><td>Within ±30ppm/℃</td></tr>
<tr><td>X7R</td><td>Within ±15%</td></tr>
<tr><td>X7S</td><td>Within ±22%</td></tr>
<tr><td>X5R</td><td>Within ±15%</td></tr>
<tr><td>X6S</td><td>Within ±22%</td></tr>
<tr><td>Y5V</td><td>Within +30%/-80%</td></tr>
</table></td></tr>
<tr><td>7.</td><td>Adhesive Strength of Termination</td><td>* Pressurizing force：
2N (0201) and 5N (≤0603) and 10N (>0603)
* Test time: 10±1 sec.</td><td>* No remarkable damage or removal of the terminations.</td></tr>
<tr><td>8.</td><td>Vibration Resistance</td><td>* Vibration frequency: 10~55 Hz/min.
* Total amplitude: 1.5mm
* Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.)
*Before initial measurement (Class II only):
To apply de-aging at 150℃ for 1hr then set for 24± 2 hrs at room temp.
Cap./DF(Q) Measurement to be made after de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.</td><td> No remarkable damage.
* Cap change and Q/D.F.: To meet initial spec.</td></tr>
<tr><td>9.</td><td>Solderability</td><td>* Solder temperature: 235±5℃
* Dipping time: 2±0.5 sec.</td><td>* 75% min. coverage of all metalized area.</td></tr>
<tr><td>10.</td><td>Bending Test</td><td>* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 5 mm and then the pressure shall be maintained for 5±1 sec.
*Before initial measurement (Class II only):
To apply de-aging at 150℃ for 1hr then set for 24± 2 hrs at room temp.
* Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>* No remarkable damage.
* Cap change：
NP0: within ±5% or 0.5pF whichever is larger
X7R, X5R, X6S, X7S: within ±12.5%
Y5V: within ±30%
(This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)</td></tr>
<tr><td>11.</td><td>Resistance to Soldering Heat</td><td>* Solder temperature: 260±5℃
* Dipping time: 10±1 sec
* Preheating: 120 to 150℃ for 1 minute before imme rse the capacitor in a eutectic solder.
*Before initial measurement (Class II only): To apply de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.
Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.</td><td> No remarkable damage.
* Cap change:
NP0: within ±2.5% or 0.25pF whichever is larger
X7R, X5R, X6S, X7S: within ±7.5%
Y5V: within ±20%
* Q/D.F., I.R. and dielectric strength: To meet initial requirements.
* 25% max. leaching on each edge.</td></tr>
<tr><td>12.</td><td>Temperature Cycle</td><td>* Conduct the five cycles according to the temperatures and time.
<table>
<tr><td>Step</td><td>Temp. (℃)</td><td>Time (min.)</td></tr>
<tr><td>1</td><td>Min. operating temp. +0/-3</td><td>30±3</td></tr>
<tr><td>2</td><td>Room temp.</td><td>2~3</td></tr>
<tr><td>3</td><td>Max. operating temp. +3/-0</td><td>30±3</td></tr>
<tr><td>4</td><td>Room temp.</td><td>2~3</td></tr>
</table>
*Before initial measurement (Class II only): To apply de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.
* Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.</td><td>* No remarkable damage.
* Cap change：
NP0: within ±2.5% or 0.25pF whichever is larger
X7R, X5R, X6S, X7S: within ±7.5%
Y5V: within ±20%
* Q/D.F., I.R. and dielectric strength: To meet initial requirements.</td></tr>
</table>

Copyright © by Walsin Technology Corporation. | All rights reserved.

<table>
<tr><th>No.</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>13.</td><td>Humidity (Damp Heat) Steady State</td><td>*Test temp.: 40±2℃
*Humidity: 90~95%RH
*Test time: 500+24/-0hrs.
*Before initial measurement (Class II only): To apply de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.
* Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.</td><td>* No remarkable damage.
* Cap change:
NP0: within ±5% or 0.5pF whichever is larger
X7R, X5R, X6S, X7S: ≥10V**,within ±12.5%; ≦6.3V within ±25%;
TT series & C≥ 1uF,within ±25%
**10V: 0603≧4.7μF;0402≧1μF;0201≧0.1μF, within ±25%;
Y5V: ≥10V, within ±30%; ≦6.3V, within +30/-40%
* Q/D.F. value:
NP0: More than 30pF Q≥350, 10pF≤C≤30pF, Q≥275+2.5C
Less than 10pF Q≥200+10C
X7R, X5R, X6S, X7S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td rowspan="3">≧100V</td><td rowspan="3">≦3%</td><td>≦6%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦7.5%</td><td>0805＞0.1μF, 0603≧0.068μF, 1206>1μF;1210≧2.2μF;TT series</td></tr>
<tr><td>≦20%</td><td>0805＞0.22μF;1210≧3.3μF</td></tr>
<tr><td rowspan="3">50V</td><td rowspan="3">≦3%</td><td>≦6%</td><td>0201(50V);0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.01uF;1210≧4.7μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.012μF; 0603>0.1μF; 0805≧1μF(0805/X7R>0.47μF);
1206≧2.2μF; 1210≧10μF; TT series</td></tr>
<tr><td>35V</td><td>≦5%</td><td>≦20%</td><td>0603≧1μF;0805≥2.2μF;1206≧2.2μF;1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦5%</td><td>≦10%</td><td>0201≧0.01μF;0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦14%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF;0402≧0.10μF&(0402/X7R≧0.056μF); TT series
;0603≧0.47μF;0805≧2.2μF;1206≧4.7μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.47μF</td></tr>
<tr><td>16V</td><td>≦5%</td><td>≦10%</td><td>0603≧0.15μF;0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦7.5%</td><td>≦15%</td><td>0201≧0.01μF(0201/X7R≧0.022μF);0402≧0.033μF;
0603≧0.68μF;0805≧2.2μF;1206≧4.7μF; 1210≧22μF; TT series</td></tr>
<tr><td>≦15%</td><td>0201≧0.012μF; 0402≧0.33μF(0402/X7R≧0.22μF);
0603≧0.33μF;0805≧2.2μF;1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">6.3V</td><td rowspan="2">≦15%</td><td>≦20%</td><td>0201≧0.1μF ;0402≧1μF; TT series; 01R5</td></tr>
<tr><td>≦30%</td><td>0201≧0.1μF;0402≧1μF(0402/X6S≧0.47μF);0603≧10μF;
0805≧4.7μF;1206≧47μF;1210≧100μF;TT series</td></tr>
<tr><td>4V</td><td>≦20%</td><td>---</td><td>---</td></tr>
</table>
Y5V:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td rowspan="2">≧50V</td><td rowspan="2">≦7.5%</td><td>≦10%</td><td>0603≧0.1μF; 0805≧0.47μF;
1206≧4.7μF</td></tr>
<tr><td>≦20%</td><td>1210≧6.8μF</td></tr>
<tr><td>35V</td><td>≦10%</td><td>---</td><td>---</td></tr>
<tr><td rowspan="2">25V</td><td rowspan="2">≦7.5%</td><td>≦10%</td><td>0402≧0.047μF;0603≧0.1μF;
0805≧0.33μF;1206≧1μF; 1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0402≧0.068μF;0603≧0.47μF;
1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td>16V
(C<1.0μF)</td><td>≦10%</td><td>≦12.5%</td><td>0402≧0.068μF; 0603≧0.68μF</td></tr>
<tr><td>16V
(C≧1.0μF)</td><td>≦12.5%</td><td>≦20%</td><td>0402≧0.22μF
0603≧2.2μF; 0805≧3.3μF;
1206≧10μF;1210≧22μF; 1812≧47μF;</td></tr>
<tr><td>10V</td><td>≦20%</td><td>≦30%</td><td>0402≧0.47μF</td></tr>
<tr><td>6.3V</td><td>≦30%</td><td>---</td><td>---</td></tr>
</table>
*I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller.
Class II (X7R, X5R, X6S, X7S, Y5V)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="7">1GΩ or RxC≧10 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V:0603≥1μF;0805≥2.2μF; 1206≧2.2μF;1210≧10μF</td></tr>
<tr><td>25V:0201≧0.1uF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF;
1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≧0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF;
1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V ; 4V ; TT series ; All X6S/X7S items; Size≥1812</td></tr>
</table></td></tr>
</table>

Copyright © by Walsin Technology Corporation. | All rights reserved.

<table>
<tr><th>No</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>14</td><td>Humidity (Damp Heat) Load</td><td>*Test temp.：40±2℃
*Humidity：90~95%RH
*Test time：500+24/-0 hrs.
*To apply voltage：
Rated voltage (MAX. 500V)
*Before initial measurement (Class II only): To apply de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.
* Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.</td><td>* No remarkable damage.
Cap change:
NP0: ±7.5% or 0.75pF whichever is larger.
X7R, X5R, X6S, X7S: ≥10V**,within ±12.5%; ≦6.3V within ±25%;
TT series & C≥ 1uF,within ±25%
**10V: 0603≧4.7μF;0402≧1μF;0201≧0.1μF, within ±25%;
Y5V: ≥10V, within ±30%; ≦6.3V, within +30/-40%
Q/D.F. value:
NP0: C≥30pF,Q≥200;C<30pF, Q≥100+10/3C
X7R, X5R, X6S, X7S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td rowspan="3">≧100V</td><td rowspan="3">≦3%</td><td>≦6%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦7.5%</td><td>0805＞0.1μF, 0603≧0.068μF, 1206>1μF;1210≧2.2μF;TT series</td></tr>
<tr><td>≦20%</td><td>0805＞0.22μF;1210≧3.3μF</td></tr>
<tr><td rowspan="3">50V</td><td rowspan="3">≦3%</td><td>≦6%</td><td>0201(50V);0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.01uF;1210≧4.7μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.012μF; 0603>0.1μF; 0805≧1μF(0805/X7R>0.47μF); 1206≧2.2μF; 1210≧10μF; TT series</td></tr>
<tr><td>35V</td><td>≦5%</td><td>≦20%</td><td>0603≧1μF;0805≥2.2μF;1206≧2.2μF;1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦5%</td><td>≦10%</td><td>0201≧0.01μF;0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦14%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF;0402≧0.10μF&(0402/X7R≧0.056μF); TT series :0603≧0.47μF:0805≧2.2μF;1206≧4.7μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.47μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0603≧0.15μF;0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.01μF(0201/X7R≧0.022μF);0402≧0.033μF; 0603≧0.68μF:0805≧2.2μF;1206≧4.7μF; 1210≧22μF; TT series</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦7.5%</td><td>≦15%</td><td>0201≧0.012μF; 0402≧0.33μF(0402/X7R≧0.22μF); 0603≧0.33μF;0805≧2.2μF;1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0201≧0.1μF ;0402≧1μF; TT series; 01R5</td></tr>
<tr><td>6.3V</td><td>≦15%</td><td>≦30%</td><td>0201≧0.1μF;0402≧1μF(0402/X6S≧0.47μF);0603≧10μF; 0805≧4.7μF;1206≧47μF;1210≧100μF;TT series</td></tr>
<tr><td>4V</td><td>≦20%</td><td>---</td><td>---</td></tr>
</table>
Y5V:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td>≧50V</td><td>≦7.5%</td><td>≦10%</td><td>0603≧0.1μF; 0805≧0.47μF;1206≧4.7μF</td></tr>
<tr><td></td><td></td><td>≦20%</td><td>1210≧6.8μF</td></tr>
<tr><td>35V</td><td>≦10%</td><td>---</td><td>---</td></tr>
<tr><td rowspan="2">25V</td><td rowspan="2">≦7.5%</td><td>≦10%</td><td>0402≧0.047μF;0603≧0.1μF; 0805≧0.33μF;1206≧1μF; 1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0402≧0.068μF;0603≧0.47μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">16V (C<1.0μF)</td><td rowspan="2">≦10%</td><td>≦12.5%</td><td>0402≧0.068μF; 0603≧0.68μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.22μF</td></tr>
<tr><td>16V (C≧1.0μF)</td><td>≦12.5%</td><td>≦20%</td><td>0603≧2.2μF; 0805≧3.3μF; 1206≧10μF;1210≧22μF; 1812≧47μF;</td></tr>
<tr><td>10V</td><td>≦20%</td><td>≦30%</td><td>0402≧0.47μF</td></tr>
<tr><td>6.3V</td><td>≦30%</td><td>---</td><td>---</td></tr>
</table>
*I.R.: ≥10V, 500MΩ or 25 Ω-F whichever is smaller.
Class II (X7R, X5R, X6S, X7S, Y5V)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="7">500MΩ or RxC≧5 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V:0603≥1μF;0805≥2.2μF; 1206≧2.2μF;1210≧10μF</td></tr>
<tr><td>25V:0201≧0.1uF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≧0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V ; 4V ; TT series ; All X6S/X7S items; Size≥1812</td></tr>
</table></td></tr>
</table>

Copyright © by Walsin Technology Corporation. | All rights reserved.

<table>
<tr><th>No</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>15.</td><td>High Temperature Load (Endurance)</td><td>
*Test temp. :
NP0, X7R/X7E/X7S: 125±3℃
X6S: 105±3℃
X5R, Y5V: 85±3℃
*Test time: 1000+24/-0 hrs.
*To apply voltage:
(1) ≦6.3V or C≧10μF or TT series: 150% of rated voltage.
(2) 10V~250V: 200% of rated voltage.
(3) 400V~450V: 120% of rated voltage.
(4) 500V: 150% of rated voltage.
(5) 630V~3000V: 120% of rated voltage.
(6) 4000V: 110% of rated voltage
(7) 100% of rated voltage for below range.
<table>
<tr><th>Size</th><th>Dielectric</th><th>Rated voltage</th><th>Capacitance range</th></tr>
<tr><td>0201</td><td>X5R/X7R/X6S</td><td>≦10V</td><td>C≧0.1μF</td></tr>
<tr><td></td><td></td><td>≧16V</td><td>C >0.1μF</td></tr>
<tr><td rowspan="5">0402</td><td rowspan="2">X5R</td><td>≦16V</td><td>C >1.0μF</td></tr>
<tr><td>25V,50V</td><td>C≧1.0μF</td></tr>
<tr><td rowspan="2">X6S</td><td>6.3V</td><td>C >1.0μF</td></tr>
<tr><td>10V~25V</td><td>C≧1.0μF</td></tr>
<tr><td>X7R/X7S/Y5V</td><td>6.3V,10V</td><td>C≧1.0μF</td></tr>
<tr><td rowspan="3">0603</td><td rowspan="3">X5R/X7R/ X6S/X7S</td><td>4V</td><td>C≧22μF</td></tr>
<tr><td>6.3V,10V</td><td>C≧4.7μF</td></tr>
<tr><td>25V,35V</td><td>C≧1.0μF</td></tr>
<tr><td rowspan="3">0805</td><td rowspan="3">X5R/X7R/ X6S/X7S</td><td>4V</td><td>C≧47μF</td></tr>
<tr><td>6.3V</td><td>C≧22μF</td></tr>
<tr><td>10V~50V</td><td>C≧10μF</td></tr>
<tr><td>1206</td><td>X5R/X7R/X6S</td><td>≦6.3V</td><td>C≧47μF</td></tr>
<tr><td rowspan="2">1210</td><td>X5R/X7R/X6S</td><td>16V</td><td>C≧47μF</td></tr>
<tr><td>X7R</td><td>100V</td><td>C≧3.3μF</td></tr>
<tr><td>TT15</td><td>X5R</td><td>6.3V</td><td>C >1.0μF</td></tr>
<tr><td>TT18</td><td>Y5V</td><td>6.3V,10V</td><td>C≧2.2μF</td></tr>
<tr><td rowspan="2">TT21</td><td>Y5V</td><td>6.3V</td><td>C≧10μF</td></tr>
<tr><td>X5R/X7R/X6S</td><td>≦10V</td><td>C≧10μF</td></tr>
<tr><td>TT31</td><td>Y5V</td><td>6.3V</td><td>C≧22μF</td></tr>
</table>
**1WV items must follow de-rating conditions.
(8) 150% of rated voltage for below range.
<table>
<tr><th>Size</th><th>Dielectric</th><th>Rated voltage</th><th>Capacitance range</th></tr>
<tr><td rowspan="2">0201</td><td>X5R/X6S</td><td>16V,25V</td><td>C=0.1μF</td></tr>
<tr><td>X7R</td><td>16V</td><td>C≧0.022μF</td></tr>
<tr><td rowspan="3">0402</td><td rowspan="3">X7R/X5R/ X6S</td><td>50V</td><td>C>0.1μF</td></tr>
<tr><td>10~25V</td><td>C≧0.22μF</td></tr>
<tr><td>Y5V</td><td>16V</td><td>C≧0.47μF</td></tr>
<tr><td rowspan="4">0603</td><td>X7S</td><td>50V~100V</td><td>C>0.22μF</td></tr>
<tr><td>X7R</td><td>50V</td><td>C>0.1μF</td></tr>
<tr><td>X5R</td><td>50V</td><td>C≧1.0μF</td></tr>
<tr><td>X5R/X7R/ X6S/X7S</td><td>10V,16V,</td><td>C≧1.0μF</td></tr>
<tr><td></td><td>Y5V</td><td>16V</td><td>C≧2.2μF</td></tr>
<tr><td rowspan="5">0805</td><td rowspan="5">X5R/X7R/ X6S/X7S</td><td>100V</td><td>C≧0.47μF</td></tr>
<tr><td>50V</td><td>C≧1.0μF</td></tr>
<tr><td>35V</td><td>C≧2.2μF</td></tr>
<tr><td>10~25V</td><td>C≧4.7μF</td></tr>
<tr><td>Y5V</td><td>16V</td><td>C≧4.7μF</td></tr>
<tr><td rowspan="2">1206</td><td rowspan="2">X5R/X7R/ X6S/X7S</td><td>100V</td><td>C>1.0μF</td></tr>
<tr><td>50V</td><td>C=4.7μF</td></tr>
<tr><td>1210</td><td>X5R/X7R/ X6S/X7S</td><td>50V~100V</td><td>C≧2.2μF</td></tr>
<tr><td>1825
2220
2225</td><td>X7R</td><td>100V~250V</td><td>C≧1.0μF</td></tr>
</table>
* Before initial measurement (Class II only): To apply de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.
* Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.
** De-rating conditions:
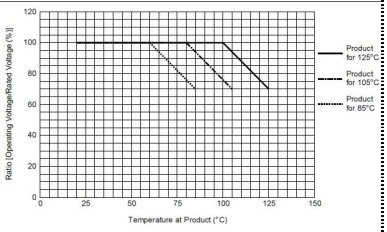

</td><td>
* No remarkable damage.
Cap change:
NP0: ±3.0% or ±0.3pF whichever is larger
X7R, X5R, X6S, X7S: ≥10V**,within ±12.5%; ≦6.3V within ±25%;
TT series & C≥ 1uF,within ±25%
**10V: 0603≧4.7μF;0402≧1μF;0201≧0.1μF, within ±25%;
Y5V: ≥10V, within ±30%; ≦6.3V, within +30/-40%
Q/D.F. value:
NP0: More than 30pF, Q≥350
10pF≤C<30pF, Q≥275+2.5C
Less than 10pF, Q≥200+10C
X7R, X5R, X6S, X7S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td rowspan="3">≧100V</td><td rowspan="3">≦3%</td><td>≦6%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦7.5%</td><td>0805＞0.1μF,0603≧0.068μF,1206>1μF;1210≧2.2μF;TT series</td></tr>
<tr><td>≦20%</td><td>0805＞0.22μF;1210≧3.3μF</td></tr>
<tr><td rowspan="3">50V</td><td rowspan="3">≦3%</td><td>≦6%</td><td>0201(50V);0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.01uF;1210≧4.7μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.012μF; 0603>0.1μF; 0805≧1μF(0805/X7R>0.47μF); 1206≧2.2μF; 1210≧10μF; TT series</td></tr>
<tr><td>35V</td><td>≦5%</td><td>≦20%</td><td>0603≧1μF;0805≥2.2μF;1206≧2.2μF;1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦5%</td><td>≦10%</td><td>0201≧0.01μF;0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦14%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF;0402≧0.10μF&(0402/X7R≧0.056μF); TT series ;0603≧0.47μF;0805≧2.2μF;1206≧4.7μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.47μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0603≧0.15μF;0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.01μF(0201/X7R≧0.022μF);0402≧0.033μF; 0603≧0.68μF;0805≧2.2μF;1206≧4.7μF; 1210≧22μF; TT ser</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦7.5%</td><td>≦15%</td><td>0201≧0.012μF; 0402≧0.33μF(0402/X7R≧0.22μF); 0603≧0.33μF;0805≧2.2μF;1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0201≧0.1μF ;0402≧1μF; TT series; 01R5</td></tr>
<tr><td>6.3V</td><td>≦15%</td><td>≦30%</td><td>0201≧0.1μF;0402≧1μF(0402/X6S≧0.47μF);0603≧10μF; 0805≧4.7μF;1206≧47μF;1210≧100μF;TT series</td></tr>
<tr><td>4V</td><td>≦20%</td><td>---</td><td>---</td></tr>
</table>
Y5V:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td rowspan="2">≧50V</td><td rowspan="2">≦7.5%</td><td>≦10%</td><td>0603≧0.1μF; 0805≧0.47μF;1206≧4.7μF</td></tr>
<tr><td>≦20%</td><td>1210≧6.8μF</td></tr>
<tr><td>35V</td><td>≦10%</td><td>---</td><td>---</td></tr>
<tr><td rowspan="2">25V</td><td rowspan="3">≦7.5%</td><td>≦10%</td><td>0402≧0.047μF;0603≧0.1μF; 0805≧0.33μF;1206≧1μF; 1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0402≧0.068μF;0603≧0.47μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td>16V (C<1.0μF)</td><td>≦10%</td><td>≦12.5%</td><td>0402≧0.068μF; 0603≧0.68μF</td></tr>
<tr><td>16V (C≧1.0μF)</td><td>≦12.5%</td><td>≦20%</td><td>0402≧0.22μF</td></tr>
<tr><td>10V</td><td>≦20%</td><td>≦30%</td><td>0402≧0.47μF</td></tr>
<tr><td>6.3V</td><td>≦30%</td><td>---</td><td>---</td></tr>
</table>
*I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller.
Class II (X7R, X5R, X6S, X7S, Y5V)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="6">1GΩ or RxC≧ 10 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V:0603≥1μF;0805≥2.2μF; 1206≧2.2μF;1210≧10μF</td></tr>
<tr><td>25V:0201≧0.1uF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≧0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V ; 4V ; TT series ; All X6S/X7S items; Size≥1812</td><td></td></tr>
</table>
</td></tr>
</table>

Copyright © by Walsin Technology Corporation. | All rights reserved.

APPENDIXES

◙ Tape & reel dimensions

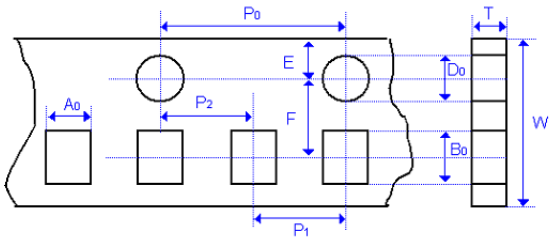

Fig. 2 The dimension of paper tape

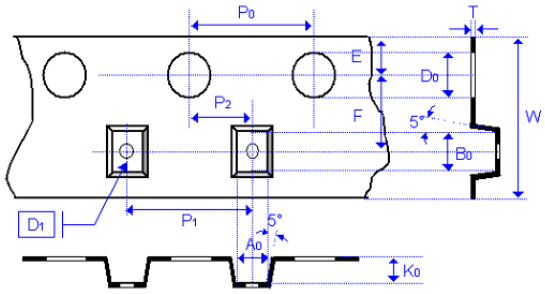

Fig. 3 The dimension of plastic tape

Size	0402	0603	0805			1206			1210		1808	1812	
Thickness	E	S, X	A	B	C, D, I	B	C, J, D	G, P	C,D,G,K	M	D, G, K	D, G, K	M, U
A_0	0.70 +/-0.20	1.05 +/-0.30	1.50 +/-0.20	1.50 +/-0.20	< 1.80	1.90 +/-0.50	< 2.00	<2.30	< 3.05	< 3.05	< 3.20	< 2.50	< 3.90
B_0	1.20 +/-0.20	1.80 +/-0.30	2.30 +/-0.20	2.30 +/-0.20	< 2.70	3.50 +/-0.50	< 3.70	< 4.00	< 3.80	< 3.80	<4.00	< 5.30	< 5.30
T	≦0.80	≦1.20	≦1.15	≦1.20	0.23 +/-0.1	≦1.20	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.25 +/-0.1	0.25 +/-0.1
K_0	-	-	-	-	< 2.50	-	< 2.50	< 2.50	< 1.50	< 2.50	< 3.20	< 2.50	< 2.50
W	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30
P_0	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10
$10xP_0$	40.00 +/-0.10	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20
P_1	2.00 +/-0.05	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	8.00 +/-0.10
P_2	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.10	2.00 +/-0.10
D_0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0
D_1	-	-	-	-	1.00 +/-0.10	-	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.50 +/-0.10	1.50 +/-0.10
E	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10
F	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	5.50 +/-0.10	5.50 +/-0.10



Fig. 4 The dimension of reel

Size	0402, 0603, 0805, 1206, 1210			1808, 1812
Reel size	7”	10”	13”	7”
C	13.0+0.5/-0.2	13.0+0.5/-0.2	13.0+0.5/-0.2	13.0+0.5/-0.2
W_1	8.4+1.5/-0	8.4+1.5/-0	8.4+1.5/-0	12.4+2.0/-0
A	178.0±1.0	250.0±1.0	330.0±1.0	178.0±1.00
N	60.0+1.0/-0	100.0±1.0	100±1.0	60.0+1.0/-0

Copyright © by Walsin Technology Corporation. | All rights reserved.

◙ Example of customer label

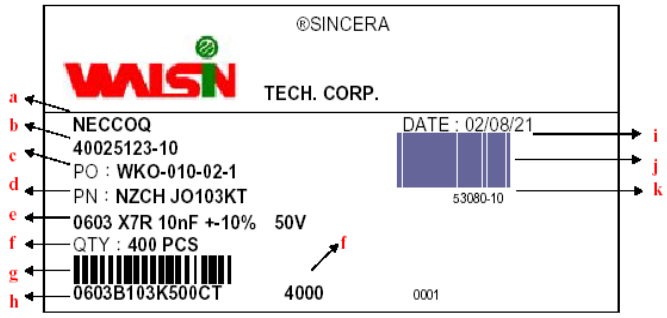

*Customized label is available upon request

a. Customer name
b. WTC order series and item number
c. Customer P/O
d. Customer P/N
e. Description of product
f. Quantity
g. Bar code including quantity & WTC P/N or customer
h. WTC P/N
i. Shipping date
j. Order bar code including series and item numbers
k. Serial number of label

◙ Constructions

No.	Name		NPO	X7R, X5R, Y5V
①	Ceramic material		$CaZrO_3$ based	$BaTiO_3$ based
②	Inner electrode		Ni	
③	Termination	Inner layer	Cu + Ag Polymer	
④		Middle layer	Ni	
⑤		Outer layer	Sn	

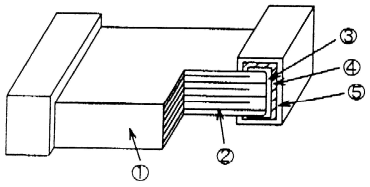

Fig. 5 The construction of MLCC

◙ Storage and handling conditions

(1) To store products at 5 to 40°C ambient temperature and 20 to 70%. related humidity conditions.

(2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)

b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.

c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight,the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

Copyright © by Walsin Technology Corporation. | All rights reserved.

◙ Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N_2 within oven are recommended.

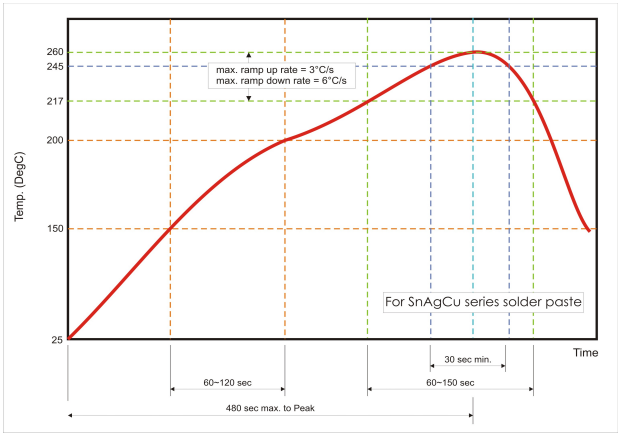

Fig. 6 Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

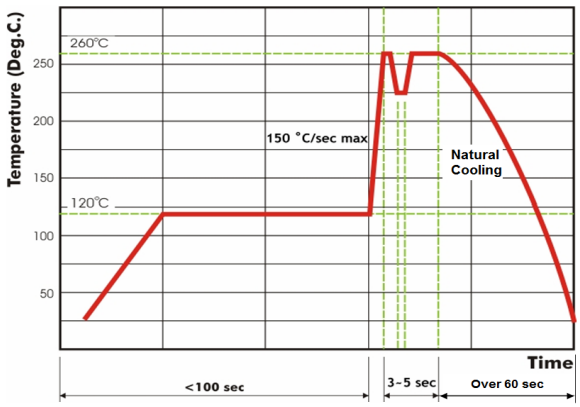

Fig. 7 Recommended wave soldering profile for SMT process with SnAgCu series solder.

版權所有 翻印必究
華新科技股份有限公司
PSA
PASSIVE SYSTEM ALLIANCE
Walsin Technology Corporation
COPYRIGHT © WALSIN TECHNOLOGY CORPORATION. ALL RIGHTS RESERVED.

Copyright © by Walsin Technology Corporation. | All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Multilayer Ceramic Capacitors MLCC - SMD/SMT ***category:***

Click to view products by Walsin ***manufacturer:***

Other Similar products are found below :

M39014/01-1467 M39014/02-1218V M39014/02-1225V M39014/02-1262V M39014/02-1301 M39014/22-0631 1210J5000102JCT 1210J2K00102KXT 1210J5000103KXT 1210J5000223KXT D55342E07B379BR-TR D55342E07B523DR-T/R 1812J1K00103KXT 1812J1K00473KXT 1812J2K00680JCT 1812J4K00102MXT 1812J5000102JCT 1812J5000103JCT 1812J5000682JCT NIN-FB391JTRF NIN-FC2R7JTRF NPIS27H102MTRF C1206C101J1GAC C1608C0G1E472JT000N C2012C0G2A472J 2220J2K00101JCT KHC201E225M76N0T00 LRC-LRF1206LF-01R025FTR1K 1812J1K00222JCT 1812J2K00102KXT 1812J2K00222KXT 1812J2K00472KXT 2-1622820-7-CUT-TAPE 2220J3K00102KXT 2225J2500824KXT CCR07CG103KM CGA2B2C0G1H010C CGA2B2C0G1H040C CGA2B2C0G1H050C CGA2B2C0G1H060D CGA2B2C0G1H070D CGA2B2C0G1H151J CGA2B2C0G1H1R5C CGA2B2C0G1H2R2C CGA2B2C0G1H3R3C CGA2B2C0G1H680J CGA2B2C0G1H6R8D CGA2B2X8R1H221K CGA2B2X8R1H472K CGA3E1X7R1C474K