

# DORABO®

# Cixi Dibo Electronics Co., LTD

产品规格书  
product specification

### 电气性能/Electrical

参考标准/Standard: UL IEC  
 额定电压/Rated voltage: 300V 320V  
 额定电流/Rated current: 15A 20A

接触电阻/Contact resistance: 20m $\Omega$

耐电压/Withstanding voltage: AC2000V/1Min

绝缘电阻/Insulation resistance: 500M $\Omega$ /DC500V

### 机械性能/Mechanical

温度范围/Temp Range: -40 $^{\circ}$ C~+105 $^{\circ}$ C

瞬间温度/MAX Soldering: +250 $^{\circ}$ C, for 5 Sec

### 尺寸/Dimensions

间距/Pitch: 7.5mm, 7.62mm




极数/Poles: 2P~24P

### 材料及电镀/Material

塑件/Housing: PA66, UL94V-0

焊针/Pin header: Brass, Tin plated


螺母/Nut: M2.5 Brass

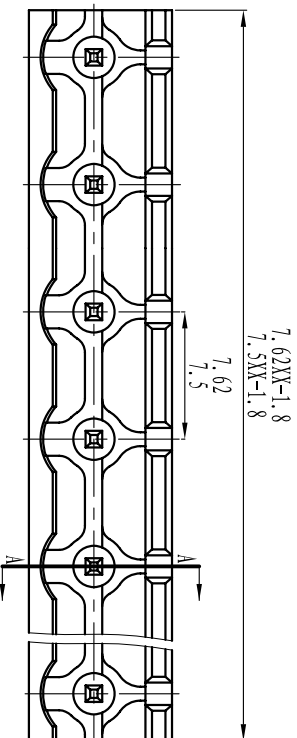

### TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle sid	≡	□	//	⊥
variable range	6 to 30 over 30	all to 6 over 6	6 to 10 over 10	10 to 50 over 50	all to 5 over 5	5 to 30 over 30	30 to 120 over 120	120 to 480 over 480
tolerance	±0.1 to ±0.2 over ±0.2	±0.2 to ±0.5 over ±0.5	±1 to 1 $^{\circ}$ over 1 $^{\circ}$	10 $^{\circ}$ to 20 $^{\circ}$ over 20 $^{\circ}$	0.5 to 0.025 over 0.025	0.06 to 0.12 over 0.12	0.4 to 0.4 over 0.4	0.4 to 0.4 over 0.4

### 订购方式 : HOW TO ORDER

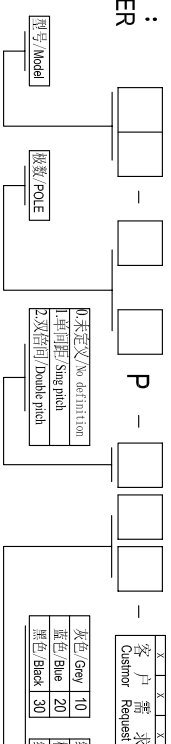

1.未定义/No definition  
 2.单间距/Sing Pitch  
 2.双间距/Double Pitch

灰色/Gray 10  
 蓝色/Blue 20  
 黑色/Black 30

绿色/Green 40  
 棕色/Orange 50  
 红色/Red 60

透明/Transparent 70  
 黄色/Yellow 80  
 白色/White 90

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE

# Cixi Dibo Electronics Co., LTD

第一视角/FIRST ANGLE PROJECTION



名称/NAME DB2EV-7.62-XXP

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [DIBO](#) manufacturer:*

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [1546228-5](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXH071G0E](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1703243](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1729386](#)