
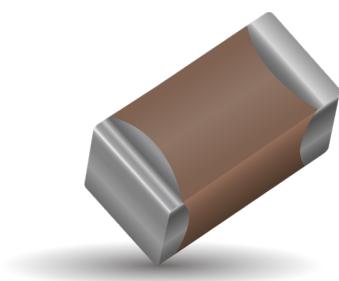


# High Voltage MLC Chip Capacitors

## For 600V to 3000V Automotive Applications - AEC-Q200

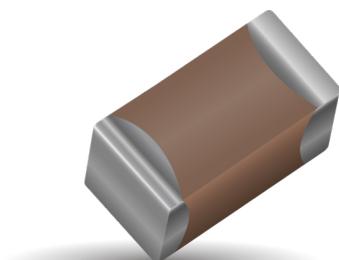

Modern automotive electronics could require components capable to work with high voltage (e.g. xenon lamp circuits or power converters in hybrid cards). AVX offers high voltage ceramic capacitors qualified according to AEC-Q200 standard.

High value, low leakage and small size are difficult parameters to obtain in capacitors for high voltage systems. AVX special high voltage MLC chip capacitors meet these performance characteristics and are designed for applications such as snubbers in high frequency power converters, resonators in SMPS, and high voltage coupling/dc blocking. These high voltage chip designs exhibit low ESRs at high frequencies.

Due to high voltage nature, larger physical dimensions are necessary. These larger sizes require special precautions to be taken in applying of MLC chips. The temperature gradient during heating or cooling cycles should not exceed 4°C per second. The preheat temperature must be within 50°C of the peak temperature reached by the ceramic bodies through the soldering process. Chip sizes 1210 and larger should be reflow soldered only. Capacitors may require protective surface coating to prevent external arcing.

To improve mechanical and thermal resistance, AVX recommend to use flexible terminations system - FLEXITERM®.

### HOW TO ORDER


1210	C	C	223	K	4	T	1	A
Size	Voltage	Dielectric	Capacitance Code	Capacitance Tolerance	Failure Rate	Terminations	Packaging	Special Code
1206	C = 630V	X7R = C		J = ±5% ( $\leq$ 1μF)	4=Automotive	T = Plated Ni and Sn	1 or 2 = 7" Reel	
1210	A = 1000V			K = ±10%		Z = FLEXITERM®	3 or 4 = 13" Reel	
1808	S = 1500V			M = ±20%				
1812	G = 2000V							
2220	W = 2500V							
	H = 3000V							

\*AVX offers nonstandard case size. Contact factory for details.

Notes: Capacitors with X7R dielectrics are not intended for applications across AC supply mains or AC line filtering with polarity reversal.  
Please contact AVX for recommendations

### CHIP DIMENSIONS DESCRIPTION

(See capacitance range chart on page 109)

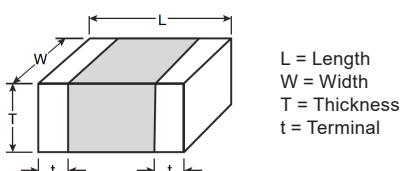

### X7R DIELECTRIC PERFORMANCE CHARACTERISTICS

Parameter/Test	Specification Limits	Measuring Conditions
Operating Temperature Range	-55°C to +125°C	Temperature Cycle Chamber
Capacitance Dissipation Factor Capacitance Tolerance	within specified tolerance 2.5% max. ±5% (J), ±10% (K), ±20% (M)	Freq.: 1kHz ±10% Voltage: 1.0Vrms s ±0.2Vrms T = +25°C, V = 0Vdc
Temperature Characteristics	X7R = ±15%	Vdc = 0V, T = (-55°C to +125°C)
Insulation Resistance	100GΩ min. or 1000MΩ • μF min. (whichever is less) 10GΩ min. or 100MΩ • μF min. (whichever is less)	T = +25°C, V = 500Vdc T = +125°C, V = 500Vdc (t ≥ 120 sec, I ≤ 50mA)
Dielectric Strength	No breakdown or visual defect	120% of rated voltage t ≤ 5 sec, I ≤ 50mA

# High Voltage MLC Chips FLEXITERM®

## For 600V to 3000V Automotive Applications – AEC-Q200

**X7R CAPACITANCE RANGE**  
**PREFERRED SIZES ARE SHADED**

CaseSize	1206				1210				1808				1812				2220				
Soldering	Reflow/Wave				ReflowOnly				ReflowOnly				ReflowOnly				ReflowOnly				
(L) Length mm (in.)	3.20 ± 0.20 (0.126 ± 0.008)	3.20 ± 0.20 (0.126 ± 0.008)	4.57 ± 0.25 (0.180 ± 0.010)	4.50 ± 0.30 (0.177 ± 0.012)													5.70 ± 0.40 (0.224 ± 0.016)				
(W) Width mm (in.)	1.60 ± 0.20 (0.063 ± 0.008)	2.50 ± 0.20 (0.098 ± 0.008)	2.03 ± 0.25 (0.080 ± 0.010)	3.20 ± 0.20 (0.126 ± 0.008)													5.00 ± 0.40 (0.197 ± 0.016)				
(T) Thickness mm (in.)	1.52 (0.060)	1.70 (0.067)	2.03 (0.080)	2.54 (0.100)													3.30 (0.130)				
(t) Terminal min max	0.25 (0.010) 0.75 (0.030)	0.25 (0.010) 0.75 (0.030)	0.25 (0.010) 1.02 (0.040)	0.25 (0.010) 1.02 (0.040)													0.25 (0.010) 1.02 (0.040)				
Voltage(V)	630 1000 1500 2000 2500	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000 2500 3000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000 2500 3000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000 2500 3000	630 1000 1500 2000	630 1000 1500 2000 2500 3000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	3000
Cap (pF)	100 101																				
	120 121																				
	150 151																				
	180 181																				
	220 221																				
	270 271																				
	330 331																				
	390 391																				
	470 471																				
	560 561																				
	680 681																				
	820 821																				
	1000 102																				
	1200 122																				
	1500 152																				
	1800 182																				
	2200 222																				
	2700 272																				
	3300 332																				
	3900 392																				
	4700 472																				
	5600 562																				
	6800 682																				
	8200 822																				
Cap (μF)	0.01 103																				
	0.012 123																				
	0.015 153																				
	0.018 183																				
	0.022 223																				
	0.027 273																				
	0.033 333																				
	0.039 393																				
	0.047 473																				
	0.056 563																				
	0.068 683																				
	0.082 823																				
	0.100 104																				
	0.120 124																				
	0.150 154																				
Voltage(V)	630 1000 1500 2000 2500	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000 2500 3000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	630 1000 1500 2000	3000	
CaseSize	1206				1210				1808				1812				2220				

NOTE: Contact factory for non-specified capacitance values

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Multilayer Ceramic Capacitors MLCC - SMD/SMT category:***

***Click to view products by AVX manufacturer:***

Other Similar products are found below :

[M39014/01-1467](#) [M39014/02-1218V](#) [M39014/02-1225V](#) [M39014/02-1262V](#) [M39014/02-1301](#) [M39014/22-0631](#) [1210J5000102JCT](#)  
[1210J2K00102KXT](#) [1210J5000103KXT](#) [1210J5000223KXT](#) [D55342E07B379BR-TR](#) [D55342E07B523DR-T/R](#) [1812J1K00103KXT](#)  
[1812J1K00473KXT](#) [1812J2K00680JCT](#) [1812J4K00102MXT](#) [1812J5000102JCT](#) [1812J5000103JCT](#) [1812J5000682JCT](#) [NIN-FB391JTRF](#)  
[NIN-FC2R7JTRF](#) [NPIS27H102MTRF](#) [C1206C101J1GAC](#) [C1608C0G1E472JT000N](#) [C2012C0G2A472J](#) [2220J2K00101JCT](#)  
[KHC201E225M76N0T00](#) [LRC-LRF1206LF-01R025FTR1K](#) [1812J1K00222JCT](#) [1812J2K00102KXT](#) [1812J2K00222KXT](#)  
[1812J2K00472KXT](#) [2-1622820-7-CUT-TAPE](#) [2220J3K00102KXT](#) [2225J2500824KXT](#) [CCR07CG103KM](#) [CGA2B2C0G1H010C](#)  
[CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#) [CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#)  
[CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H3R3C](#) [CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2X8R1H221K](#) [CGA2B2X8R1H472K](#)  
[CGA3E1X7R1C474K](#)