



NOTES:  
1. ALL THE OPERATING PERFORMANCE SPEC. IN BELLOW TABLE SHOULD BE MET. THE MEASURE METHOD IS SHOWN AS FIG.1.  
OPERATE THE DOME 10 TIMES BEFORE MEASURING.

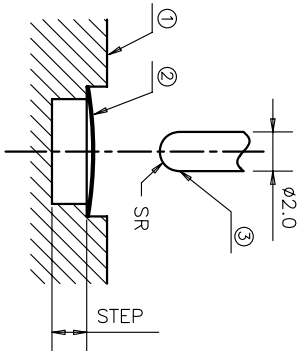

$F_p$ : PEAK FORCE  
 $F_r$ : RETURN FORCE  
 $T_1$ : CONTACT POINT  
 $T_2$ : BUTTON POINT  
 $C/R = (F_p - F_r) / F_p * 100\%$   
 REMARK:  
 1. T2 TESTED WHEN THE SETP IS DEEP ENOUGH TO NOT CONTACT WITH DOME DURING MEASURING.  
 $2. T_1 < T_2$

Fig1. MEASURING METHOD

Fig2. OPERATING PERFORMANCE

- 1) TEST SPEED : 120 SPM
- 2) TEST FORCE :  $F_p$
- 3) MATERIAL : ALUMINUM.
2. OBVIOUS BURR, SCRATCHES, CRACKES IS FORBIDDEN.
3. DIMENSIONS MARKED  $\checkmark$  SHOULD BE CHECKED BY Q.C. AND P.E.
4. DIMENSIONING SHALL BE INTERPRETED PER ANSI Y14.5M-1982.
5. HARMFUL MATERIAL CONTROL PLEASE FOLLOW DOC."HY-QW-02"
6. PART PERFORMANCE TABLE  $\checkmark$

PART NAME	D	H	P.F(gf)	C/R(%)
600-5***-****	$\phi 5^{+0.05}$	$0.25 \pm 0.05$	CP±15	C/R±10
600-C***-****	$\phi 4.5^{+0.05}$	$0.22 \pm 0.05$	CP±15	C/R±10
600-4***-****	$\phi 4^{+0.05}$	$0.2 \pm 0.05$	CP±15	C/R±10
600-B***-****	$\phi 3.5^{+0.05}$	$0.18 \pm 0.05$	CP±15	C/R±10
600-3***-****	$\phi 3^{+0.05}$	$0.16 \pm 0.05$	CP±15	C/R±10
600-L***-****	$\phi 2.92^{+0.02}$	$0.15 \pm 0.05$	CP±15	C/R±10
600-J***-****	$\phi 2.9^{+0.05}$	$0.15 \pm 0.05$	CP±15	C/R±10
600-K***-****	$\phi 2.85^{+0.02}$	$0.15 \pm 0.05$	CP±15	C/R±10
600-A***-****	$\phi 2.5^{+0.05}$	$0.15 \pm 0.05$	CP±15	C/R±10
600-D***-****	$\phi 2.2^{+0.05}$	$0.15 \pm 0.05$	CP±15	C/R±10
600-2***-****	$\phi 2.0^{+0.05}$	$0.15 \pm 0.05$	CP±15	C/R±10

TYPE:	6 6 1 1 0 1	DIMPLE:	0 1 3 4 5
D:	2= $\phi 2.0\text{mm}$ 3= $\phi 3.0\text{mm}$ 4= $\phi 4.0\text{mm}$ 5= $\phi 5.0\text{mm}$ 6= $\phi 6.0\text{mm}$ A= $\phi 2.5\text{mm}$ B= $\phi 3.5\text{mm}$ C= $\phi 4.5\text{mm}$ D= $\phi 2.2\text{mm}$	C/R:	0=60% 1=65% 2=55% 3=45% 4=35% 5=25% 6=15%
STEP:	0=0.00mm 1=0.01mm 2=0.02mm 3=0.03mm 4=0.04mm 5=0.05mm 6=0.06mm 7=0.07mm 8=0.08mm 9=0.09mm A=0.10mm	MATERIAL:	0=NI-SUS 1=AG-SUS S=AG-SUS 1=PB 2=BECU
CP:	060=060gf 080=080gf 100=100gf 130=130gf 160=160gf 180=180gf 200=200gf 250=250gf		

TYPE:	6 6 1 1 0 1	DIMPLE:	0 1 3 4 5
D:	2= $\phi 2.0\text{mm}$ 3= $\phi 3.0\text{mm}$ 4= $\phi 4.0\text{mm}$ 5= $\phi 5.0\text{mm}$ 6= $\phi 6.0\text{mm}$ A= $\phi 2.5\text{mm}$ B= $\phi 3.5\text{mm}$ C= $\phi 4.5\text{mm}$ D= $\phi 2.2\text{mm}$	C/R:	0=60% 1=65% 2=55% 3=45% 4=35% 5=25% 6=15%
STEP:	0=0.00mm 1=0.01mm 2=0.02mm 3=0.03mm 4=0.04mm 5=0.05mm 6=0.06mm 7=0.07mm 8=0.08mm 9=0.09mm A=0.10mm	MATERIAL:	0=NI-SUS 1=AG-SUS S=AG-SUS 1=PB 2=BECU
CP:	060=060gf 080=080gf 100=100gf 130=130gf 160=160gf 180=180gf 200=200gf 250=250gf		

REV	ECON NO.	APPD
A	HC060009	ZO
B	HC060033	ZO
C	HC100168	ZO
D	HC110001	ZO
E	HC140005	ZO
F	HC160002	ZO

X ± 0.2	X' ± 3'	UNITS	MM
.X ± 0.1	.X' ± 2'	MAT'L	
.XX ± 0.05	.XX' ± 1'	FINISH	
.XXX ± 0.03	.XXX' ± 0.5'		

NAME(NTENDED USE)	HON YUAN
METAL DOME FOR TACT SWITCH	
PART NO.(NTENDED USE)	600-****-****
APPD: ZO 3/18/2014	
CHKD: M.H.LI 3/18/2014	
DR: WP.LU 3/18/2014	
TITILE: DOME CUSTMER DRAWING	
DWG NO.:	600-0000-000

SCALE	1/1	SHEET	1/5	REV.	F
-------	-----	-------	-----	------	---

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Tactile Switches](#) category:*

*Click to view products by [HYP](#) manufacturer:*

Other Similar products are found below :

[KMR633NG LFG](#) [5GTH92001](#) [5GTH9202242](#) [6426-201-11343](#) [MJ1226](#) [MJTP1109B](#) [MJTP1138EAUTR](#) [MJTP1230BL](#) [MJTPSHW](#)  
[GS6.90F300QP](#) [1-1977223-0](#) [1-1977120-4](#) [ADTSA62NV](#) [ADTSA62RV](#) [ADTSA63KV](#) [ADTSA644NV](#) [ADTSM24NVTR](#) [ADTSMW66NV](#)  
[ADTSMW67RV](#) [ATM533VTR](#) [1571300-3](#) [B3F-3123](#) [B3F-6055A](#) [B3F-B32-01-KIT](#) [1977177-8](#) [1977266-1](#) [2-1977223-4](#) [2-1977223-7](#)  
[ADTS644KV](#) [ADTSA61RV](#) [ADTSA62KV](#) [ADTSA63NV](#) [ADTSA63RV](#) [ADTSA65NV](#) [ADTSM21NSVTR](#) [ADTSM25RVTR](#)  
[ADTSM31RVTR](#) [ADTSM32NVTR](#) [ADTSM61YVTR](#) [ADTSM63SVTR](#) [ADTSM644KVTR](#) [ADTSMW64RV](#) [ADTSMW69NV](#)  
[FSMRA4JHA04](#) [GS4.70F300QP](#) [D38999/20JJ37SA](#) [TL1105B](#) [TL1105J](#) [ATH447K2Q](#) [ATM534VTR](#)