

# MBR20150CT-MBR20200CT

Schottky Barrier Rectifiers



Reverse Voltage: 150,200V

Forward Current: 20A


TO-220AB

## Features

- ◇ Metal-Semiconductor junction with guard ring
- ◇ Epitaxial construction
- ◇ Low forward voltage drop, low swithing losses
- ◇ High surge capacity
- ◇ For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- ◇ The plastic material carries U/L recognition 94V-0

## Mechanical Data

- ◇ **Case:** JEDEC TO-220AB, molded plastic body
- ◇ **Polarity:** As marked
- ◇ **Mounting Position:** Any
- ◇ **Weight:** 0.071 ounce, 2.006 grams

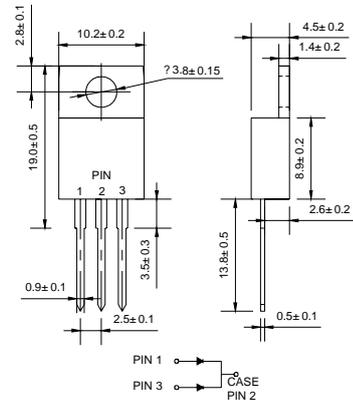

Dimensions in millimeters

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	MBR20150CT	MBR20200CT	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	150	200	V
Maximum RMS voltage	$V_{RWS}$	135	140	V
Maximum DC blocking voltage	$V_{DC}$	150	200	V
Maximum average forward total device rectified current @ $T_C=100^\circ\text{C}$	$I_{(AV)}$	20		A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	150		A
Maximum instantaneous forward voltage @10A	$V_F$	0.95		V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	$I_R$	0.2 50		mA
Maximum thermal resistance (Note1)	$R_{\theta JC}$	1.5		$^\circ\text{C/W}$
Operating junction temperature range	$T_J$	-55 --- +150		$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-55 --- +150		$^\circ\text{C}$

NOTES: 1. Thermal resistance from junction to case.



## Ratings AND Characteristic Curves

FIG.1 TYPICAL FORWARD CHARACTERISTICS

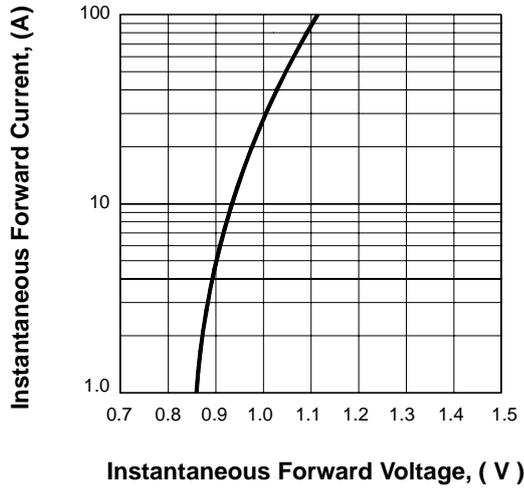


FIG.2 FORWARD DERATING CURVE

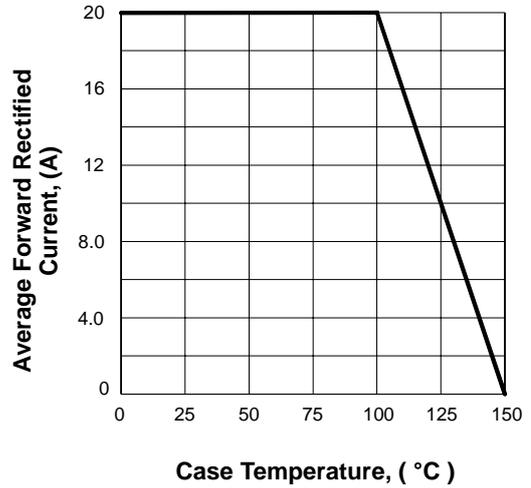


FIG.3 TYPICAL REVERSE CHARACTERISTICS


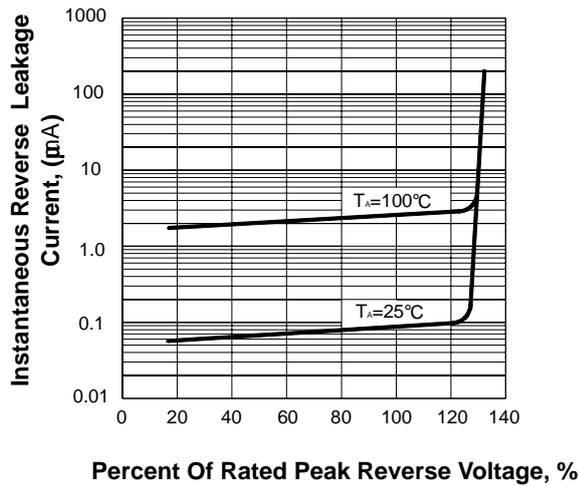


FIG.4 PEAK FORWARD SURGE CURRENT

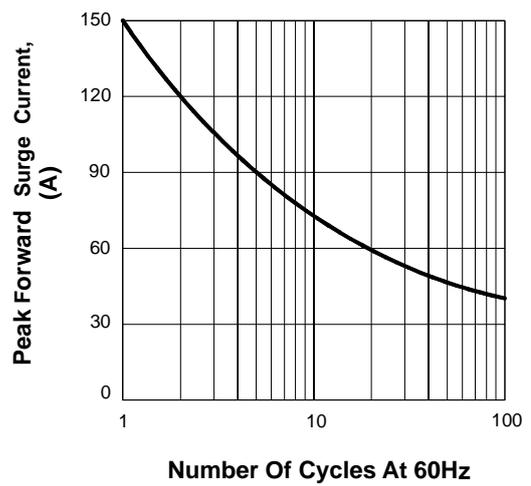

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [LGE](#) manufacturer:*

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)