

FEATURES

- Glass passivated chip junction
- High surge overload rating: 30A peak
- Saves space on printed circuit boards
- This series is UL recognized under Component Index, file number E239431
- Plastic material has U/L flammability classification 94V-O
- High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs. (2.3kg) tension

MECHANICAL DATA

- Case: Molded plastic body over passivated junctions
- Terminals: Plated leads solderable per MIL-STD-750, Method 2026

ABS		
Dim	Min	Max
A	4.80	5.20
B	4.30	4.60
C	1.20	1.50
D	6.15	6.65
E	0.15	0.35
F	0.30	0.90
G	0.20MAX	
H	1.35	1.65
I	0.60	0.80
K	3.80	4.20
All Dimensions in mm		

Maximum Ratings (@TA = 25°C unless otherwise specified)

Characteristic	Symbol	ABS2	ABS4	ABS6	ABS8	ABS10	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	200	400	600	800	1000	V
RMS Reverse Voltage	V_{RMS}	140	280	420	560	700	V
DC Blocking Voltage	V_{DC}	200	400	600	800	1000	V
Maximum average forward Output current $T_L=100^\circ\text{C}$	$I_{F(AV)}$	0.8 ¹⁾ 1.0 ²⁾					A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}	30					A
Current squared time $t < 8.3\text{ms}$, $T_a = 25$	I^2t	3.74					A ² s

Thermal Characteristics

Characteristic	Symbol	ABS2	ABS4	ABS6	ABS8	ABS10	UNITS
Typical thermal resistance junction to lead	$R_{\theta JL}$	25					C/W
On aluminum substrate	$R_{\theta JA}$	80					
Operating junction temperature range	T_J	- 55 ---- + 150					C
Storage temperature range	T_{STG}	- 55 ---- + 150					C

Electrical Characteristics (@TA = 25°C unless otherwise specified)

Characteristic	Symbol	ABS2	ABS4	ABS6	ABS8	ABS10	UNITS
Maximum instantaneous forward voltage at 0.4 A	V_F	0.95					V
Maximum reverse current @ $T_A=25$ at rated DC blocking voltage	I_R	10					μA

FIG.1 TYPICAL FORWARD CHARACTERISTICS

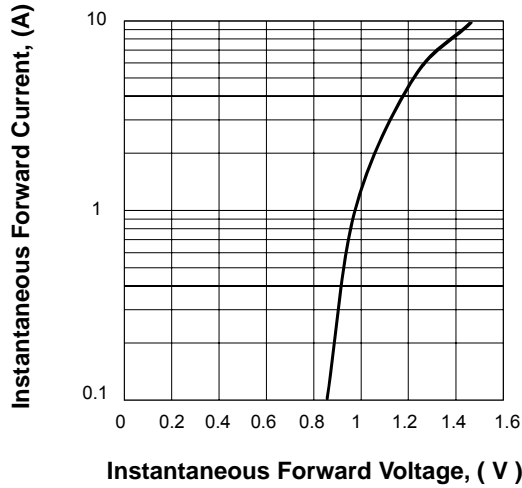


FIG.2 FORWARD DERATING CURVE

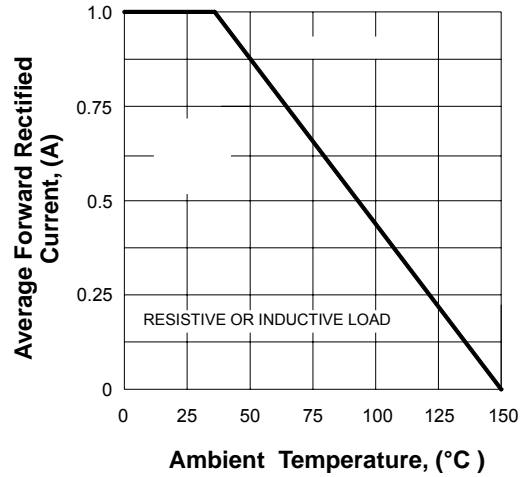


FIG.3 TYPICAL REVERSE CHARACTERISTICS


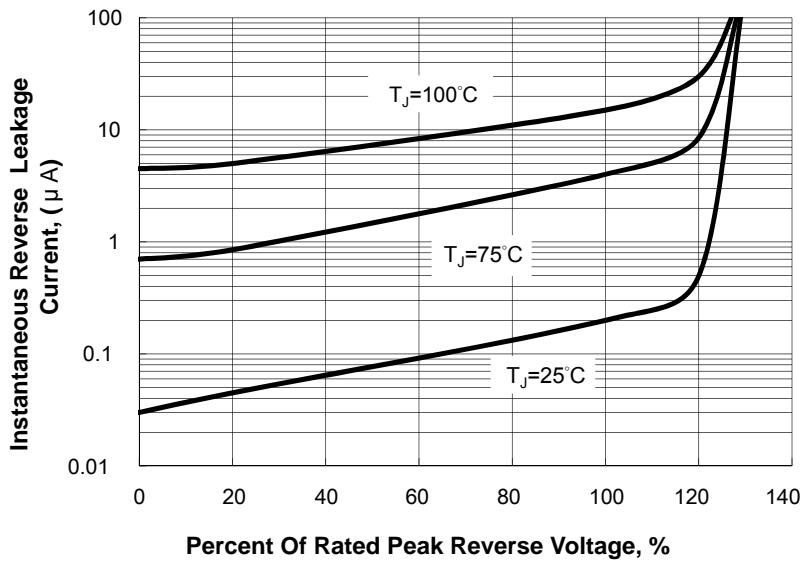


FIG.4 PEAK FORWARD SURGE CURRENT

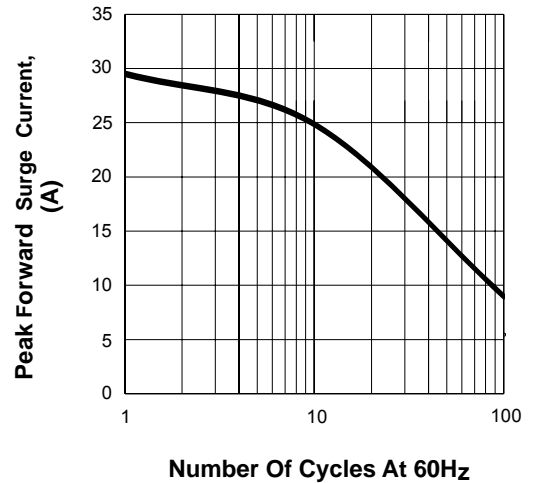

Device	Package	Shipping
ABS2-ABS10	ABS	5000/Tape&Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [LGE](#) manufacturer:

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S](#) [RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)