

HV Series

Features

- ♦ Long life of 2000 hrs at 105°C
- ◆ Reflow soldering is available
- Available for high density mounting
- ◆ For detail specifications, please refer to Engineering Bulletin No. E131
- ◆ RoHS Compliant

100 6.3V H7B


Specifications

Item	Performance Characteristics											
Operating Temperature Range		-55 +105°C										
Rated Voltage Range		6.3~50 VDC										
Capacitance Range		0.1 to 1500 μ F										
Capacitance Tolerance		±20%(120Hz,+20°C)										
Leakage Current (+20°C,max.)	I≦0.01 CV or 3 (μ A) After 2 minutes, whichever is greater measured with rated working voltage applied											
	Working volta	ge(VDC)	6.3	10	16	25	35	50				
Dissipation Factor (tan δ , at 20°C , 120Hz)	D.F.(%)max	ф 4~6.3	30	24	20	16	14	14				
(48.75 37.20 7 120.72)	D.I. (70)IIIax	ф8~10	35	26	24	18	14	14				
	Impedance ratio max											
Low Temperature Characteristics	Rated voltag	, , ,	6.3	1	0	16	25	25 35 50		50		
(at 120Hz)	Z-25℃/Z		6	4	4	4	3		2	2		
	Z-40°C ∕ Z	'+20°C	12	1	0	8	6		4	4		
Load Life	Applied voltage After test require Capacitance cha	Duration time :2000 Hrs : $+105^{\circ}$ C : Rated DC working voltage :After test requirement at $+20^{\circ}$ C : Capacitance change :Within $\pm 30\%$ of the initial value :Not more than 300% of specified value										
Shelf Life	Test conditions Duration time :1000 Hrs Ambient temperature :+105°C Applied voltage :None After test requirement at +20°C : Same limits as Load life. Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.											
	The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing form the hot plate and restored at room temperature, they meet the characteristic requirements listed under.											
Resistance to soldering heat	Leakage curre	Leakage current Less than specified value										
	Capacitance change Within ±10% of initial value											
	tan δ Less than specified value											

Multiplier for Ripple Current vs. Frequency

CAP(μ F) \setminus Frequency(Hz)	60(50)	120	500	1K	≧10K
0.1≦CAP≦100 μ F	0.8	1.0	1.20	1.30	1.50
100 < CAP≦1500 μ F	0.8	1.0	1.10	1.15	1.20

Diagram of Dimensions:(unit:mm)

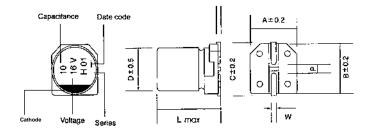

Γ	φD	L	Α	В	С	W	Р
	4	5.5	4.3	4.3	4.9	0.5~0.8	1.0
	5	5.5	5.3	5.3	5.9	0.5~0.8	1.4
	6.3	5.5	6.6	6.6	7.2	0.5~0.8	2.2
Γ	6.3	7.7	6.6	6.6	7.2	0.5~0.8	2.2
Γ	8	6.5	8.3	8.3	9.0	0.5~0.8	2.3
	8	10.5	8.3	8.3	9.0	0.7~1.1	3.1
	10	10.5	10.3	10.3	11.0	0.7~1.1	4.5



Case Size

φ DxL(mm)

WV (SV)	6.3 (8)		10 (13)		16 (20)		2 (3		35 (44)		50 (63)	
Cap(µF)	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1											4X5.5	1.0
0.22											4X5.5	2.0
0.33											4X5.5	3.0
0.47											4X5.5	4.0
1											4X5.5	8.4
2.2											4X5.5	11
3.3											4X5.5	13
4.7							4X5.5	12	4X5.5	14	4X5.5	18
10					4X5.5	20	4X5.5	22	4X5.5	24	6.3X5.5	28
22	4X5.5	23	4X5.5	25	4X5.5	31	5X5.5	38	5X5.5	40	6.3X7.7	50
22			4/3.3		5X5.5	35	3/3.3		6.3X5.5	46	8X6.5	55
33	4X5.5	28	4X5.5	34	5X5.5	36	6.3X5.5	48	6.3X7.7	47	6.3X7.7	95
		20	4/\0.0	J 4	6.3X5.5	40		40	8X6.5	50	8X10.5	135
47	4X5.5	37	5X5.5	40	5X5.5	45	6.3X7.7	56	6.3X7.7	60	6.3X7.7	115
47	5X5.5	42			6.3X5.5	56	8X6.5	60	8X6.5	65	8X10.5	155
100	5X5.5	46	6.3X5.5	55	6.3X7.7	58	6.3X7.7	110	6.3X7.7	130	10X10.5	315
100	6.3X5.5	57	8X6.5	60	8X6.5	62	8X10.5	160	8X10.5	180	10/10.5	313
150	6.3X5.5	70	6.3X5.5	90	6.3X7.7	125	8X10.5	175	8X10.5	190	10X10.5	330
100	8X6.5	90	8X6.5	110	8X6.5	140						
220	6.3X7.7	90	6.3X7.7	140	6.3X7.7	170	8X10.5	180	8X10.5	250	10X10.5	350
220	8X6.5	130	8X6.5	160	8X10.5	185	10X10.5	190	10X10.5	280	10/(10.0	550
330	6.3X7.7	140	8X10.5	195	8X10.5	250	8X10.5	290	10X10.5	360		
	8X10.5	170					0711010					
470	8X10.5	210	8X10.5 350		8X10.5	370	10X10.5	440				
	-14		10X10.5	420	10X10.5	420						
560	8X10.5	310	10X10.5	450	10X10.5	480						
680	10X10.5	370	10X10.5	480	10X10.5	540						
1000	10X10.5	480	10X10.5	530								
1200	10X10.5	500										
1500	10X10.5	520										

Ripple Current (mA, rms) at 105°C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - SMD category:

Click to view products by Capxon manufacturer:

Other Similar products are found below:

GA0402A270FXBAC31G RVB-50V330MG10UQ-R RVJ-50V101MH10U-R RVZ-35V151MH10U-R2 RC0J226M04005VR RC1A227M08010VR RC1C226M05005VR RC1C476M6L005VR RC1E107M6L07KVR RC1E336M6L005VR RC1H106M6L005VR RC1H475M05005VR RC1V227M10010VR RC1V476M6L006VR 50SEV1M4X5.5 TYEH1A336E55MTR TYEH1H106F55MTR TYEH1V106E55MTR 35SEV47M6.3X8 35SGV220M10X10.5 VES2R2M1HTR-0405 VZH102M1ATR-1010 50SEV10M6.3X5.5 50SGV1M4X6.1 SC1C476M05005VR SC1E107M0806BVR SC1E227M08010VR SC1H106M05005VR SC1H106M6L005VR SC1H227M10010VR SC1H335M04005VR CE4.7/50-SMD VEJ4R7M1VTR-0406 VZH331M1ETR-0810 VES101M1CTR-0605 TYEH1H475E55MTR 6.3SEV22M4X5.5 6.3SEV47M4X5.5 EEEFK1H151GP EEEFK1A681GP EEE0GA471XP EEEFK1V151GP RC1V107M6L07KVR VZH101M1VTR-0810 VE010M1HTR-0405 GYA1V151MCQ1GS EEH-ZC1J680P EEH-ZK1V181P GYA1V271MCQ1GS VZH-100M1ETR-0406