

**BIDIRECTIONAL  
ESD PROTECTION DIODE**

**STAND-OFF VOLTAGE - 5.0 Volts  
POWER DISSIPATION - 130 Watts**

**GENERAL DESCRIPTION**

The L13ESD5V0CE2 is designed to protect sensitive electronics from damage or latch up due to ESD, lightning, and other voltage induced transient events. The device will protect one line operating at 5.0 volts.

**FEATURES**

- Bi-directional ESD protection of one line.
- Max. peak pulse power: P<sub>pp</sub>=130w at t<sub>p</sub> = 8/20 us.
- Low clamping voltage
- IEC 61000-4-2, level 4 (ESD), >30KV(air)  
; >30KV(contact)
- IEC 61000-4-5, level 1 (surge) ; I<sub>pp</sub>=12A at t<sub>p</sub> = 8/20us.
- Qualified to AEC-Q101 Rev\_C


**APPLICATION**

- Computers and peripherals
- Communication system
- Audio & video equipment
- Portable instrumentation


**MECHANICAL DATA**

- Case material: "Green" molding compound UL flammability classification 94V-0 (No Br, Sb, Cl),
- Component in accordance to RoHs 2011/65/EU
- Dimension = DFN, 1.00 mm (L)\* 0.6 mm (W)

**SOD-882**

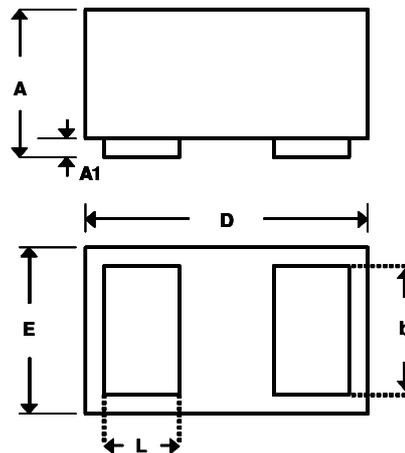

SOD-882		
DIM.	MIN.	MAX.
A	0.47	0.53
A1	0.00	0.05
b	0.25	0.55
D	0.95	1.075
E	0.55	0.675
L	0.20	0.45
All dimension in millimeter		

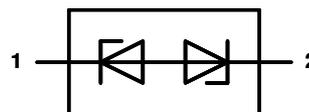

PIN ASSIGNMENT	
1	Cathode
2	Cathode

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.


**ABSOLUTE RATINGS**

PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power (8/20us waveform)	P <sub>PPM</sub>	130	W
Peak pulse current (8/20us waveform)	I <sub>pp</sub>	12	A
Operating junction temperature range	T <sub>J</sub>	-55 to +150	°C
Storage temperature range	T <sub>STG</sub>	-55 to +150	°C
Soldering temperature, t max = 10s	T <sub>L</sub>	260	°C


**ELECTRICAL CHARACTERISTICS**

PARAMETER	TEST CONDITIONS	SYMBOL	MIN	MAX	UNIT
Reverse standoff voltage	--	V <sub>DRM</sub>	--	5.0	V
Reverse leakage current	V <sub>DRM</sub> = 5V	I <sub>RM</sub>	--	100	nA
Breakdown voltage	I <sub>R</sub> = 1 mA	V <sub>BR</sub>	5.5	9.5	V
Junction capacitance (each I/O pin and ground)	V <sub>R</sub> = 0V, f = 1MHz,	C <sub>J</sub>	--	45	pF
Clamping voltage	I <sub>pp</sub> = 1A (8/20 us)	V <sub>CL</sub>	--	10	V
	I <sub>pp</sub> = 12A (8/20 us)		--	14	


**RATING AND CHARACTERISTIC CURVES  
L13ESD5V0CE2**

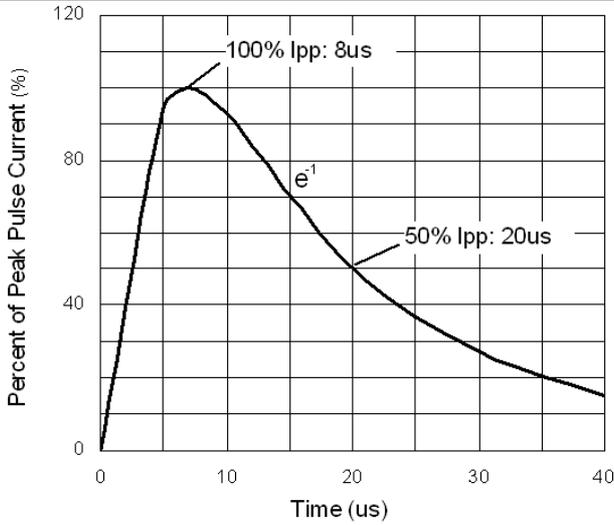


**Figure 1. 8/20 us pulse waveform according to IEC 61000-4-5**

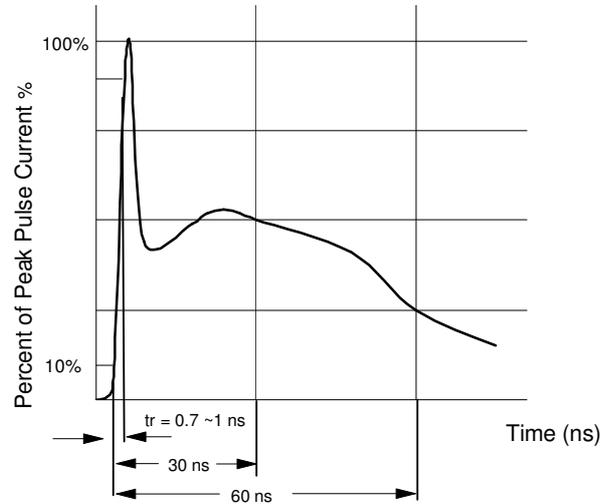


**Figure 2. ESD pulse waveform according to IEC 61000-4-2**

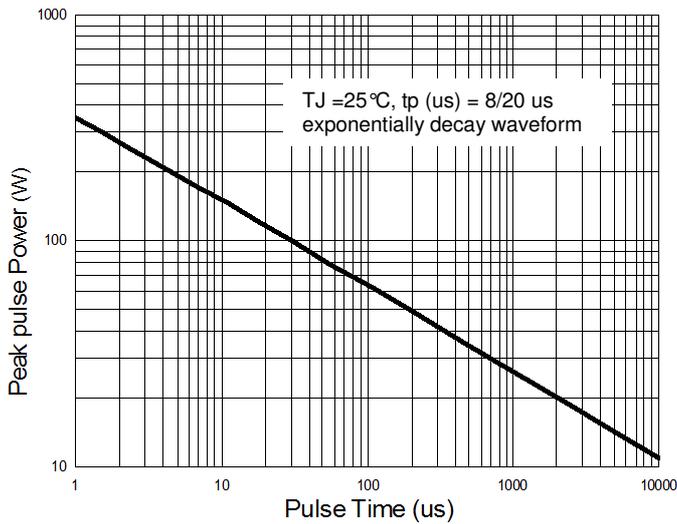


**Figure 3. Power Dissipation versus Pulse Time**

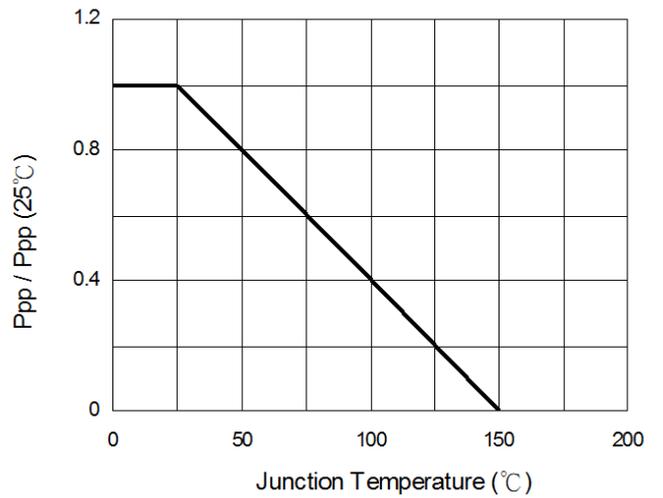

**Figure 4. Peak pulse power versus TJ**

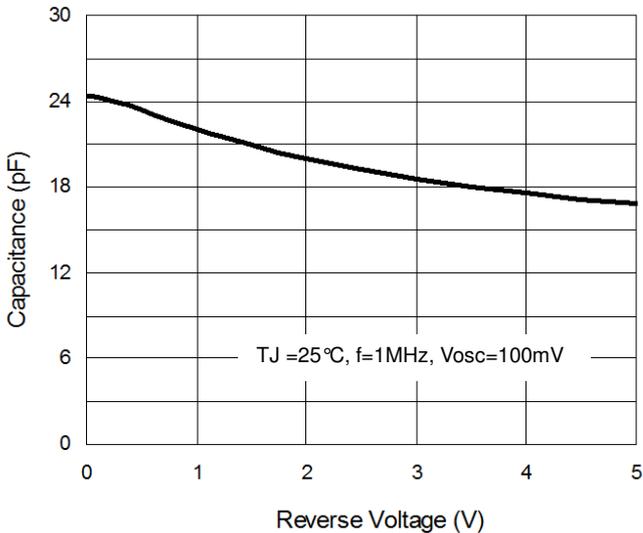

**Figure 5. Typical Junction Capacitance**

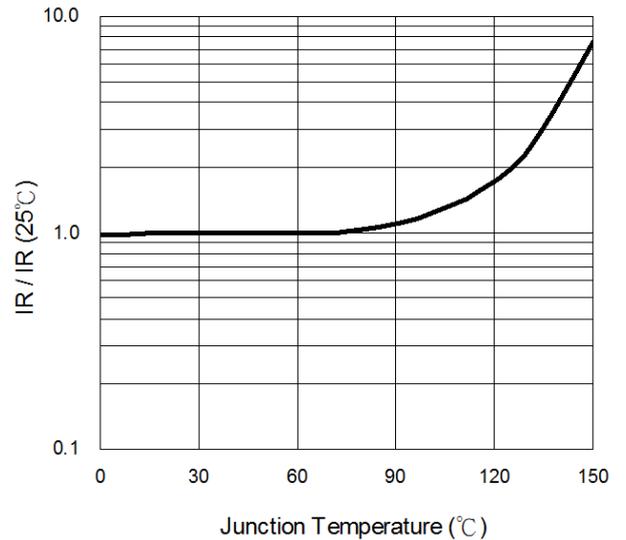

**Figure 6. Reverse Leakage Current versus TJ**

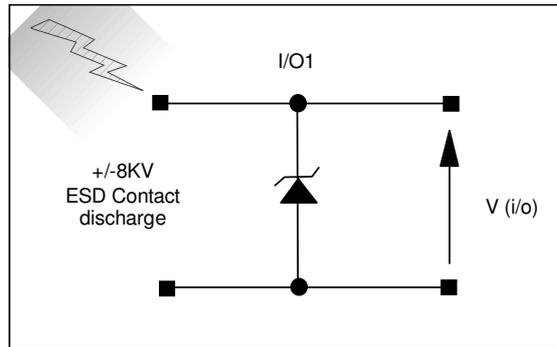


Figure 7. ESD Test Configuration

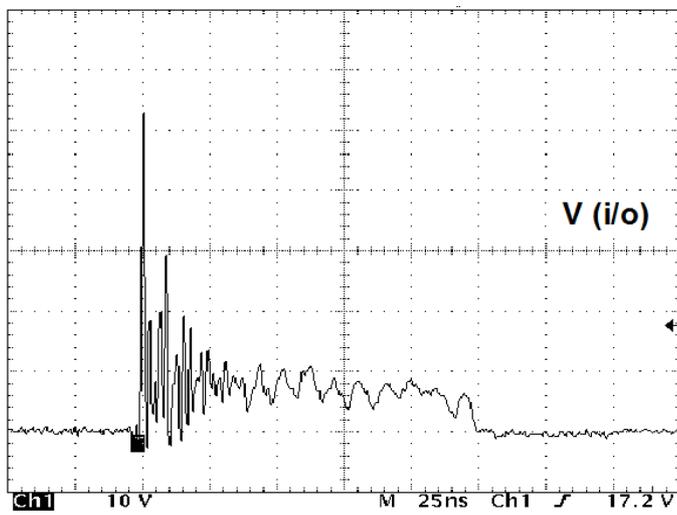


Figure 8. Clamped +8 kV ESD voltage waveform


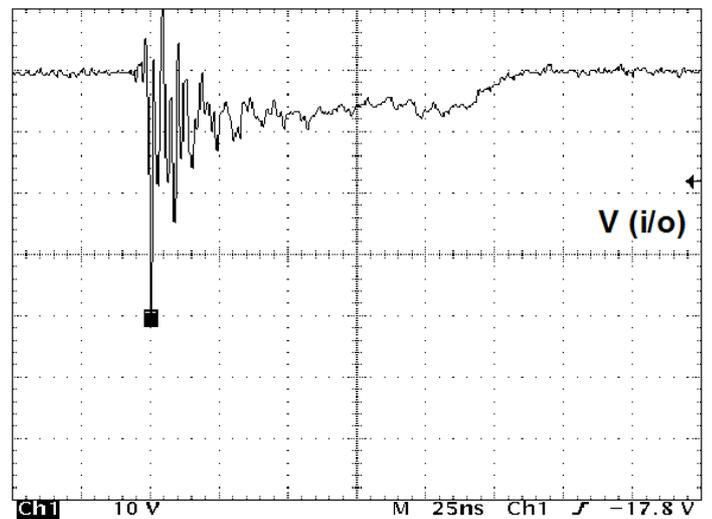


Figure 9. Clamped -8 kV ESD voltage waveform

**MARKING AND PACKAGING INFORMATION**  
**L13ESD5V0CE2**



**Marking and Orientation :**

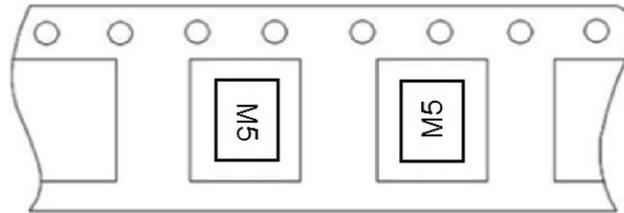


Note: Marking is none direction

**Packaging Information :**

DEVICE	Q'TY/REEL (PCS)	REEL DIA. (INCH)	Q'TY/BOX (PCS)	Q'TY/CARTON (PCS)
L13ESD5V0CE2	10K	7	150K	300K

**SOD-882 Soldering Pad Layout :**

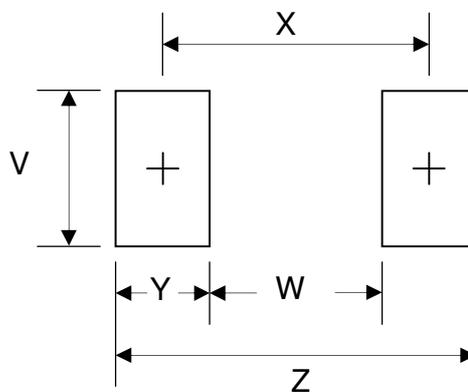

Dim.	Millimeters	Inches
Z	1.30	0.051
X	0.75	0.029
W	0.20	0.007
Y	0.55	0.021
V	0.80	0.031

## **Important Notice and Disclaimer**

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Lite-On](#) manufacturer:*

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)  
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)  
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-](#)  
[TP](#) [MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)  
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)  
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)  
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)