

SIT505S

Photo Interrupter

The SIT505S is a photointerrupter high-performance standard type, combines high-output GaAs IRED with high sensitive phototransistor.

Features


- PCB direct mount type
- GAP:5mm
- RoHS Compliance

Applications

- Printers
- FAX
- Copiers
- Scanners
- Amusement machines

DIMENSIONS

Unit:mm

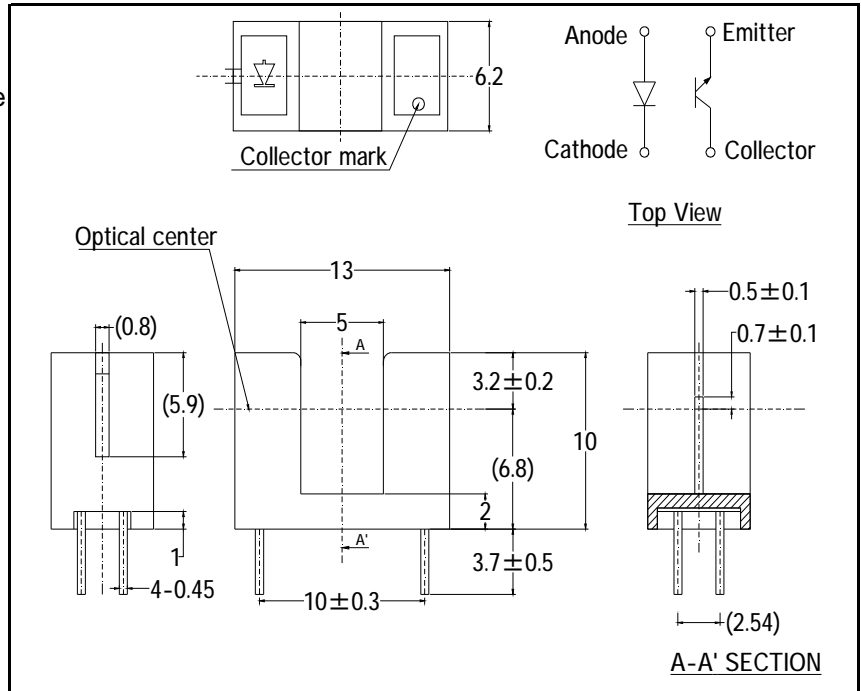

MAXIMUM RATINGS

(Ta=25°C)

Item		Symbol	Ratings	Unit
Input	Power dissipation	P_D	100	mW
	Forward current	I_F	60	mA
	Reverse voltage	V_R	5	V
Output	Collector power dissipation	P_C	100	mW
	Collector current	I_C	40	mA
	Collector-Emitter voltage	V_{CEO}	30	V
	Emitter-Collector voltage	V_{ECO}	5	V
Operating temperature		Topr.	-20~+85	°C
Storage temperature		Tstg.	-30~+85	°C
Soldering temperature *1		Tsol.	260	°C

* 1 The soldering should be 1mm away from bottom of the holder. t=within 3s









Electro-Optical Characteristics

(Ta=25°C)


Item		Symbol	Conditions	Min	Typ	Max	Unit
Input	Forward voltage	V_F	$I_F=20mA$	-	1.2	1.4	V
	Reverse current	I_R	$V_R=5V$	-	-	10	μA
	Peak wavelength	λ_p	$I_F=20mA$	-	940	-	nm
Output	Dark current	I_{CEO}	$V_{CE}=10V, E_V=0lx$	-	1	100	nA
Transmission	Light current	I_C	$I_F=20mA, V_{CE}=5V, Non-shading$	0.5	-	10	mA
	Leak current	I_{CEOD}	$I_F=20mA, V_{CE}=5V, Shading$	-	0.5	10	μA
	C-E saturation voltage	$V_{CE(sat)}$	$I_F=20mA, I_C=0.1mA$	-	0.15	0.4	V
	Rise time	tr	$I_C=2mA, V_{CC}=5V, R_L=100\Omega$	-	4	-	μs
	Fall time	tf		-	5	-	μs

Photo Interrupter


SIT505S

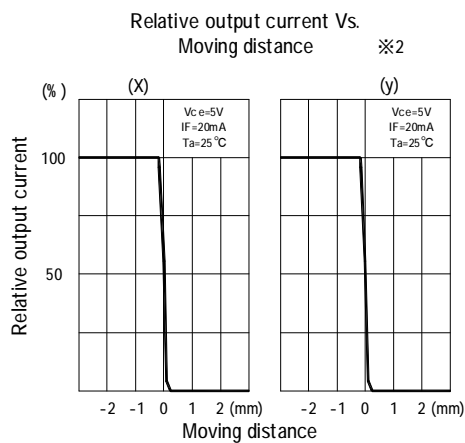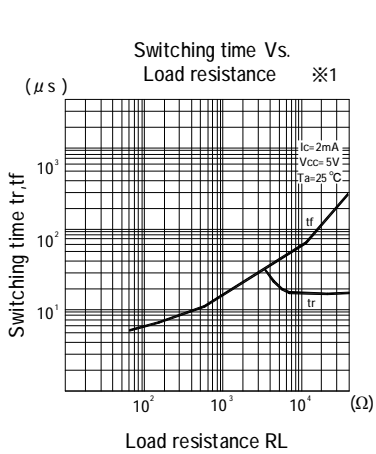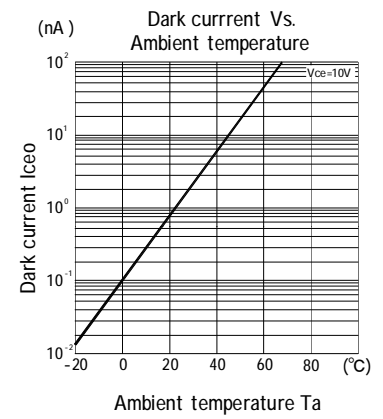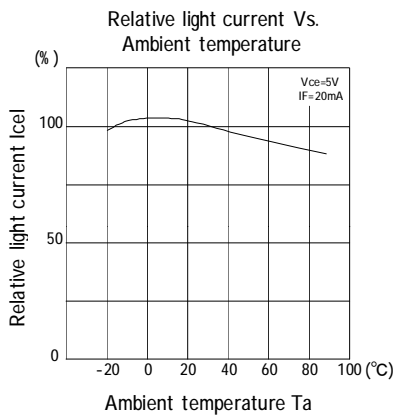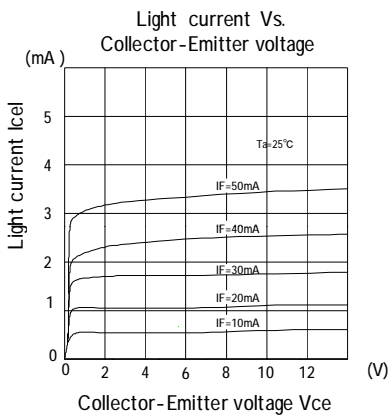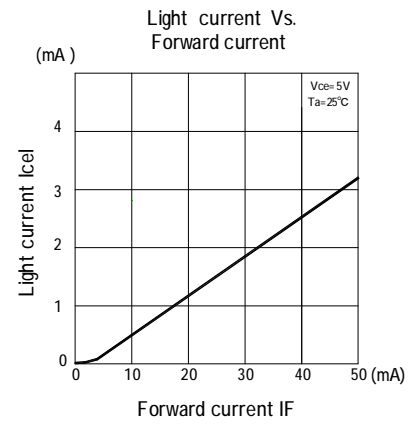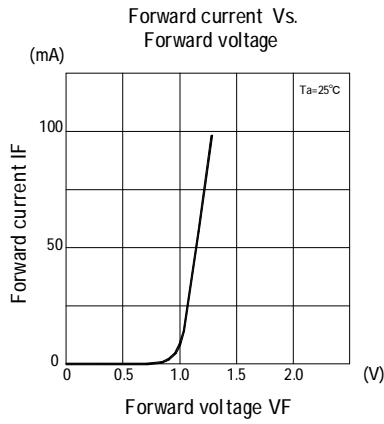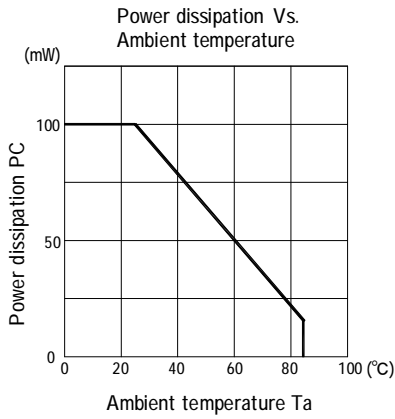

*1 Switching time measurement circuit



*2 Method of measuring position detection characteristic



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optical Switches, Transmissive, Phototransistor Output](#) *category:*

Click to view products by [Kodenshi](#) *manufacturer:*

Other Similar products are found below :

[LTH-301-07](#) [LTH-301-23](#) [LTH-306-02](#) [LTH-306-64](#) [E3C-X2C](#) [E3S-LS20B4S1](#) [E3SX2CE4](#) [EESPW301](#) [EE-SX872R](#) [EE-SX950P-W 1M](#)
[EE-SX952-R 3M](#) [RPI-0125B](#) [RPI-2501](#) [RPI-576A](#) [KRA021](#) [LTH-306-04M](#) [HOA0865-100](#) [HOA1961-055](#) [RPI-124](#) [E3F-3C4](#) [EE-SPX305-](#)
[W2A 2M](#) [EE-SX953-W 3M](#) [EE-SX972P-C1](#) [LTH-306-01](#) [EE-SX670B](#) [EE-SX771R 5M](#) [RPI-574](#) [ZGY1602\(ITR\)](#) [EESX677C1JR01M](#)
[EESX971PC1](#) [HOA1883-501](#) [EE-SX970P-C1](#) [EE-SX976-C1](#) [RPI-125](#) [RPI-243](#) [EE-SX1061](#) [EE-SX153](#) [EE-SX675P-WR 1M](#) [EE-SX971-C1](#)
[OPB853A3](#) [GP1S396HCP0F](#) [EE-SX1128](#) [OPB857Z](#) [EE-SV3-B](#) [EE-SJ3-D](#) [RPI-0226](#) [ITR8307](#) [EE-SX671P-WR 1M](#) [EE-SX675P](#) [EE-](#)
[SX951P-W 1M](#)