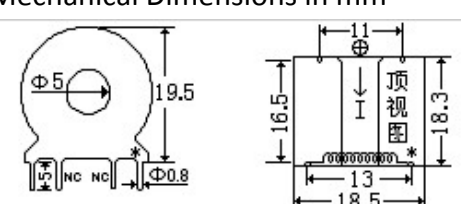
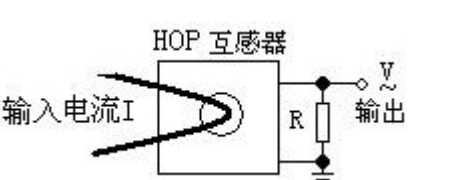


规格书

Product Specification

Description 产品类型	Current Transformer 电流互感器	
Rated current ratio 额定电流比	5A/2.5mA	
TYPE 型号	HCT226BC	
Electrical Specifications 电气规范		Mechanical Dimensions in mm
Rated Primary Current(A) 初级电流 (A)	0~5A	 <p>Same polarity: *--*</p> <p>Pin length:</p> <p>Direction for use:</p> 
Secondary Current(mA) 次级电流 (mA)	0~2.5mA	
Maximum current I _{max} (A) 最大一次电流	100A	
Rate transformation ratio 额定电流比	2000: 1	
Power-frequency withstand voltage 工频耐受耐压	5000 Vrms	
Current error 比差值	0.1%	
Rated phase displacement 额定点相位差	≤10'	
Rated frequency 额定频率	50/60Hz	
Rated short-time thermal current 短时热电流	200mA (1s)	
Rated resistive burden 额定负载电阻 (Ω)	<50Ω(100A)	
Insulation resistance: 绝缘电阻 (MΩ)	>500MΩ	
Mechanical Specifications 机械规范		
Encapsulant 灌封	epoxy resin	
Terminals 管脚	Out: Intput:	
Approx.Weight 重量	About 15g	
Tolerance 公差 (mm)	±0.5	
Storage temperature 贮存温度	-50℃<T<+100℃,	
Working temperature 工作温度	-35℃<T<+90℃	

Working humidity 湿度	0-95% (no condensation)	
Enclosure flame retardant grade	UL94 V-0	

Acceptance specification

Item	Test condition (测试条件)	Performance (判定标准)	Test Result
可焊性 Pin Welding property	将管脚针侵入 250℃锡中，时间 1.5~2 秒，上锡面积大于 90% The pin needle in 250℃ for 1.5~3 seconds on the tin pot, tin area reached 90%.	试件 90%的焊锡面积能正常上锡，外观无异常现象。 More than 95% surface of the PIN should be covered with solder. Any visual defects harmful to the characteristics shall not be allowed.	PASS
高低温实验 High / Low Temperature Life Test	高温温度为：100℃,低温温度为：-45℃放置时间都分别为：72hrs。测试结束后至室温放置>4H 方可测试电气特性 High temperature: 100±5℃ Low temperature: -45℃ Kept stabilized in chambers for 72 hrs each. then kept in the normal environment for more than 4 hours also, after that do the electrical characteristics measurement.	外观无损伤，电感值变异不超过 20%;直流电阻值变异不超过 20%。零件外观无任何裂纹或损伤，电气性能无短路或断线。 Cracking, chipping or any other defects harmful to the characteristics shall not be allowed. Short or Open defect can't be happened. Inductance&Resistances: within 20% of the initial value	PASS

Beijing HOP Technology Co., Ltd.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Transformers](#) category:

Click to view products by [Hop Tech](#) manufacturer:

Other Similar products are found below :

[MP3500](#) [BV UI 302 0156](#) [45029](#) [BV EI 302 2863](#) [BV EI 303 2809](#) [BV EI 303 3060](#) [BV EI 305 2309](#) [BV EI 306 3604](#) [BV EI 481 1295](#) [BV EI 481 1325](#) [BV UI 301 0133](#) [BV UI 302 0144](#) [BV UI 302 0161](#) [BV UI 304 0019](#) [BV UI 304 0129](#) [BV UI 304 0159](#) [BV UI 304 0173](#) [TI-EF16-2X4V-4W](#) [SPCT62/40150/5AVA3CL1](#) [SPCT62/30100/5AVA1CL1](#) [SPCT62/3075/5AVA1CL3](#) [SPCT62/40150/5AVA1.5CL1](#) [SPCT62/40200/5AVA2.5CL0.5](#) [SPCT62/40300/5AVA3CL0.5](#) [CTD-KIT](#) [44013](#) [44017](#) [44021](#) [44098](#) [44101](#) [44134](#) [44171](#) [44174](#) [44178](#) [44180](#) [44248](#) [44250](#) [44278](#) [44339](#) [44340](#) [44373](#) [44375](#) [44376](#) [44378](#) [44379](#) [44436](#) [44831](#) [B82801B0925A200](#) [PA3655NL](#) [PA3828NL](#)