

## Surface Mount Schottky Rectifiers


### SMA/DO-214AC

#### Features

- ◊ For surface mounted application
- ◊ Easy pick and place
- ◊ Metal to silicon rectifier, majority carrier conduction
- ◊ Low power loss, high efficiency
- ◊ High current capability, low VF
- ◊ High surge current capability
- ◊ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ◊ Epitaxial construction
- ◊ High temperature soldering: 260°C / 10 seconds at terminals

#### Mechanical Data

- ◊ Case: JEDEC DO-214AC Molded plastic
- ◊ Terminals: Pure tin plated, lead free
- ◊ Polarity: Indicated by cathode band
- ◊ Packaging: 16mm tape per EIA STD RS-481

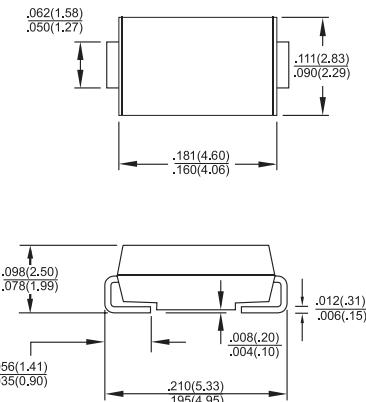

Dimensions in inches and (millimeters)

#### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.


Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%


Type Number	Symbol	SS 32	SS 33	SS 34	SS 35	SS 36	SS 39	SS 310	Units		
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	50	60	90	100	V		
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	35	42	63	70	V		
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	50	60	90	100	V		
Maximum Average Forward Rectified Current at T <sub>L</sub> (See Fig. 1)	I <sub>(AV)</sub>	3.0						A			
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	I <sub>FSM</sub>	100			70			A			
Maximum Instantaneous Forward Voltage (Note 1) IF= 3.0A @ 25°C @ 100°C	V <sub>F</sub>	0.5 0.4		0.75 0.65		0.85 0.70		V			
Maximum DC Reverse Current @ T <sub>A</sub> =25°C at Rated DC Blocking Voltage @ T <sub>A</sub> =125 °C	I <sub>R</sub>	0.5			0.1			mA	mA		
Typical Thermal Resistance ( Note 2 )	R <sub>θJL</sub> R <sub>θJA</sub>	10			5			0.5			
		17 55						°C/W			
Operating Temperature Range	T <sub>J</sub>	-55 to +125			-55 to +150			°C			
Storage Temperature Range	T <sub>STG</sub>				-55 to +150			°C			

Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle


**FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE**

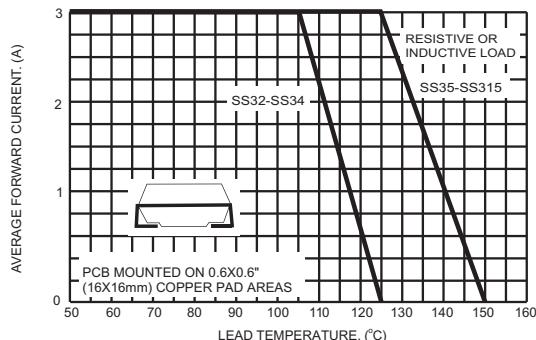


**FIG.3- TYPICAL FORWARD CHARACTERISTICS**

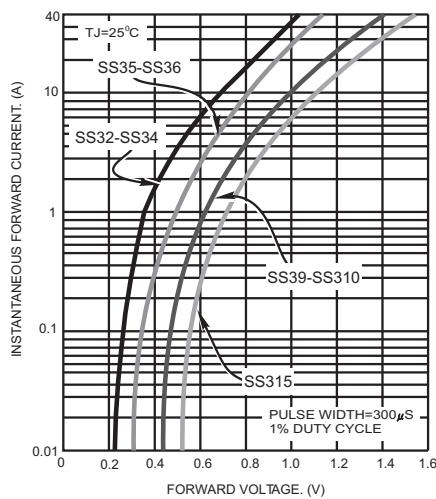


**FIG.5- TYPICAL JUNCTION CAPACITANCE**

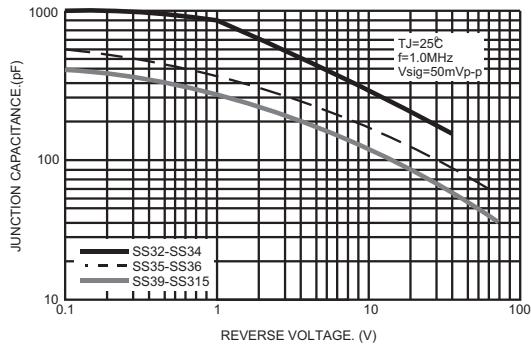


**FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

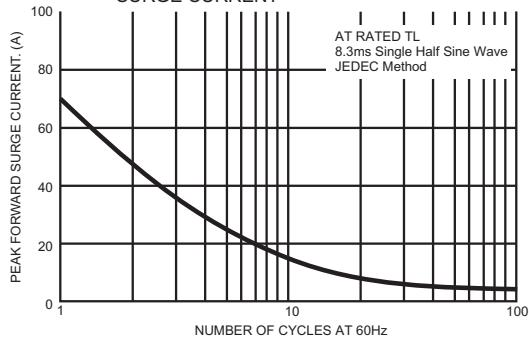

**FIG.4- TYPICAL REVERSE CHARACTERISTICS**

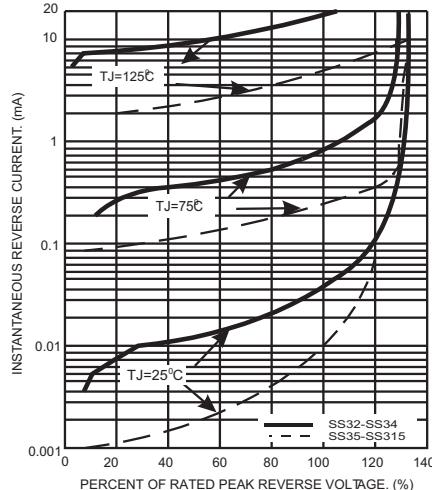

**FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS**

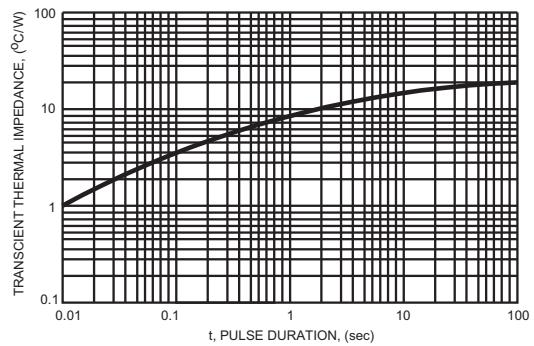

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by SLKORMICRO manufacturer:***

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)