


Features

- High current capacity in compact package $I_c = -0.5A$.
- Epitaxial planar type
- Pb-free package is available
- Suffix "-H" indicates Halogen-free part, ex. S8550-H.

Mechanical data

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, SOT-23
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Mounting Position : Any
- Weight : Approximated 0.008 gram

Package outline

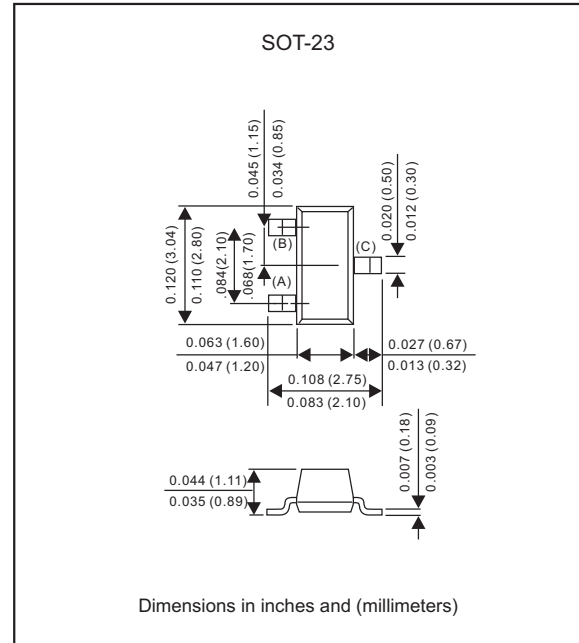

Maximum ratings (AT $T_A=25^\circ C$ unless otherwise noted)

PARAMETER	Symbol	Value	UNIT
Collector-base voltage	V_{CBO}	-40	V
Collector-emitter voltage	V_{CEO}	-25	V
Emitter-base voltage	V_{EBO}	-5.0	V
Collector current-continuoun	I_c	-500	mAdc

Thermal characteristics

PARAMETER	Symbol	MIN.	TYP.	MAX.	UNIT
Total device dissipation FR-5 board (1)	$T_A = 25^\circ C$ Derate above $25^\circ C$	P_D		225	mW
				1.8	mW/ $^\circ C$
Thermal resistance	Junction to ambient	$R_{\theta JA}$		556	$^\circ C/W$
Total device dissipation alumina substrate(2)	$T_A = 25^\circ C$ Derate above $25^\circ C$	P_D		300	mW
				2.4	mW/ $^\circ C$
Thermal resistance	Junction to ambient	$R_{\theta JA}$		417	$^\circ C/W$
Operating junction temperature range	T_J	-55		+150	$^\circ C$
Storage temperature range	T_{STG}	-55		+150	$^\circ C$

1.FR-5 = 1.0 X 0.75 X 0.062 in.

2.Alumina = 0.4 X 0.3 X 0.024 in. 99.5% alumina.

Electrical characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

Off characteristics









PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Collector-base breakdown voltage	$I_c = -100\mu\text{A}$	$V_{(BR)CBO}$	-40			V
Collector-emitter breakdown voltage	$I_c = -1.0\text{mA}$	$V_{(BR)CEO}$	-25			V
Emitter-base breakdown voltage	$I_e = -100\mu\text{A}$	$V_{(BR)EBO}$	-5.0			V
Collector cutoff current	$V_{CB} = -35\text{V}$	I_{CBO}			-150	nA
Emitter cutoff current	$V_{EB} = -4.0\text{V}$	I_{EBO}			-150	nA

On characteristics



PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
DC current gain	$I_c = -100\text{mA}, V_{CE} = -1.0\text{V}$	h_{FE}^{*Note}	100		600	
Collector-emitter saturation voltage	$I_c = -800\text{mA}, I_b = -80\text{mA}$	$V_{CE(sat)}$			-0.5	V

Note	*	L	H	J
	h_{FE}	120~200	200~350	300~400

Rating and characteristic curves

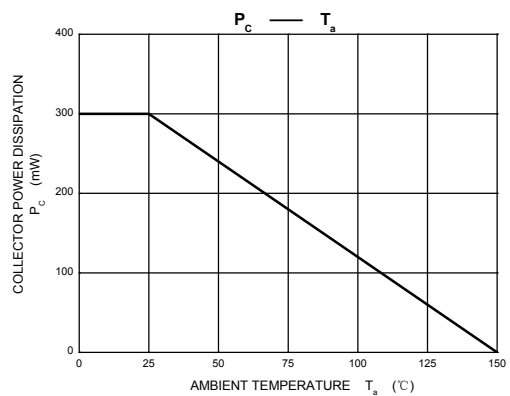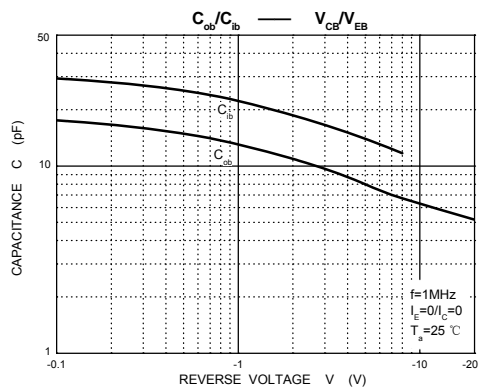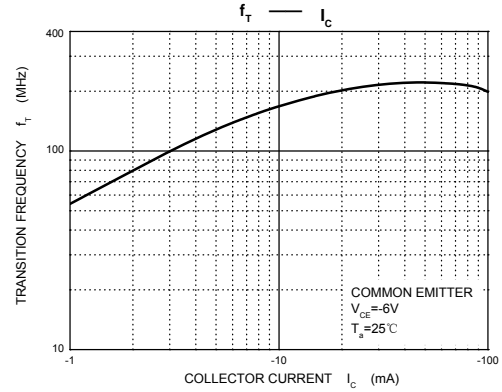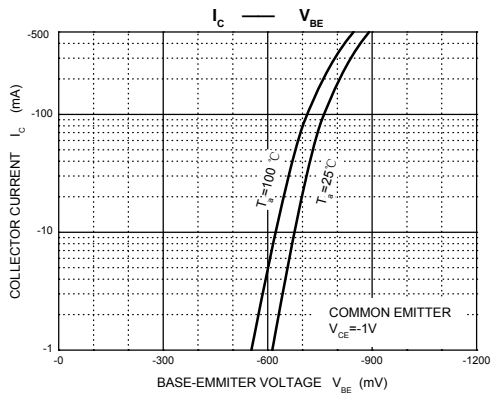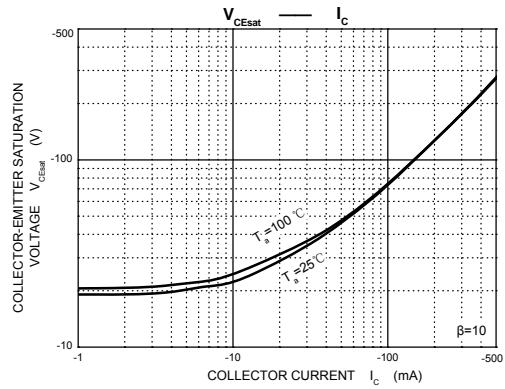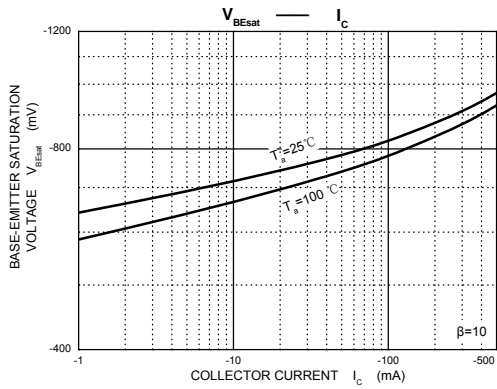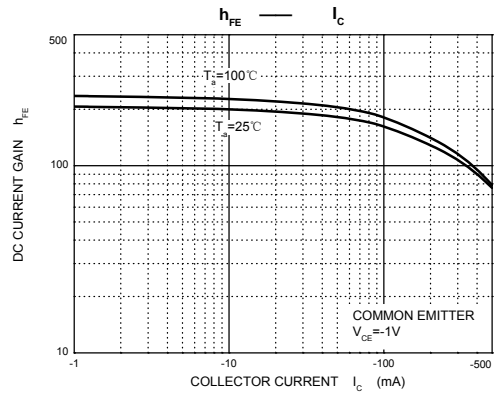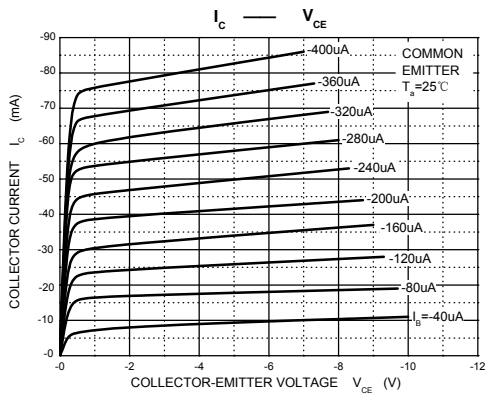

Pinning information

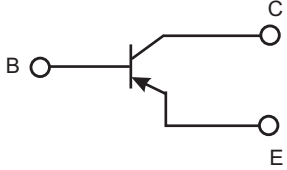
Pin	Simplified outline	Symbol
PinB Base PinC Collector PinE Emitter		

Marking

Type number	Marking code
S8550	2YT

Suggested solder pad layout

SOT-23

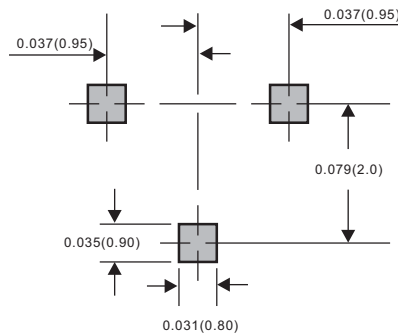

Dimensions in inches and (millimeters)

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOT-23	7"	3,000	4.0	30,000	183*123*183	178	382*257*387	240,000	11.6

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [AnBon manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)