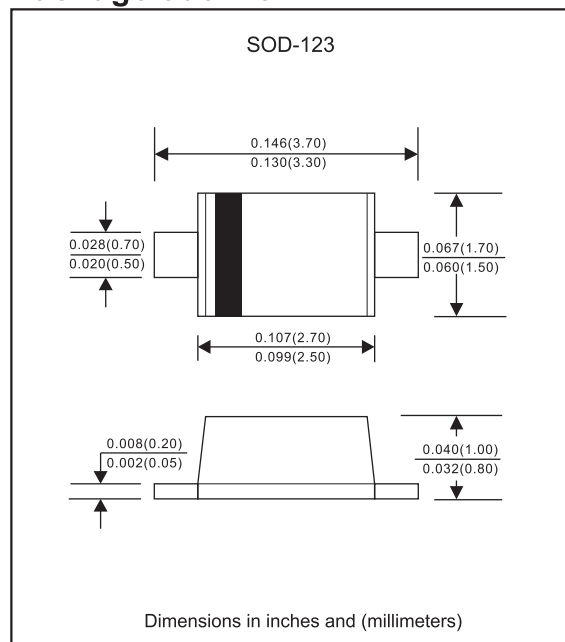


SD103AW / BW / CW**200mA Surface Mount Small Signal Schottky Diode -20V-40V****Features**

- Low current rectification and high speed switching.
- Extremely small surface mount type.
- Low forward voltage drop.
- Silicon epitaxial planar chip, metal silicon junction.
- Lead-free parts for green partner, exceeds environmental standards of MIL-STD-19500 /228
- Compliant to Halogen-free

Mechanical data

- Epoxy : UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-123
- Terminals :Plated terminals, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Mounting Position : Any

Package outline**Maximum ratings and Electrical Characteristics** (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	SD103AW	SD103BW	SD103CW	UNIT
Peak repetitive reverse voltage		V_{RRM}	40	30	20	V
Working peak reverse voltage		V_{RWM}				
DC blocking voltage		V_R				
RMS reverse voltage		$V_{R(RMS)}$	28	21	14	V
Average rectified output current		I_{FAV}	200			mA
Non-repetitive peak forward surge current	@ $t < 1.0s$	I_{FSM}	1.5			A
Total device dissipation		P_D	400			mW
Thermal resistance junction to ambient	junction to ambient	$R_{\theta JA}$	300			$^\circ\text{C}/\text{W}$
Operating temperature		T_J	-55 ~ +125			$^\circ\text{C}$
Storage temperature		T_{STG}	-65 ~ +125			$^\circ\text{C}$
Minimum Reverse breakdown voltage		$V_{(BR)R}$	40	30	20	V
Forward voltage	$I_F = 20\text{mA}$ $I_F = 200\text{mA}$	V_F		0.37 0.60		V
Reverse current	$V_R = 30\text{V}$, SD103AW $V_R = 20\text{V}$, SD103BW $V_R = 10\text{V}$, SD103CW	I_R		5.0		μA
Typical Junction capacitance	$V_R = 0\text{V}$, $f = 1.0\text{MHz}$	C_J		50		pF
Reverse recover time	$I_F = I_R = 200\text{mA}$, $I_{tr} = 0.1 \times I_R$, $R_L = 100_{\text{OHM}}$	t_{rr}		10		ns

Rating and characteristic curves (SD103AW / BW / CW)

Fig. 1 POWER DERATING CURVE

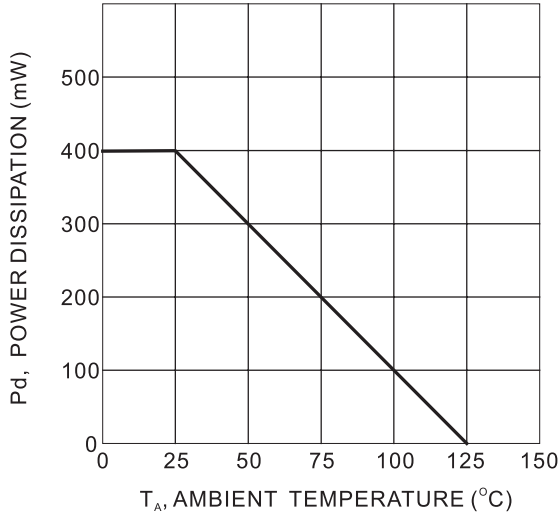


Fig. 2 TYPICAL FORWARD CHARACTERISTIC

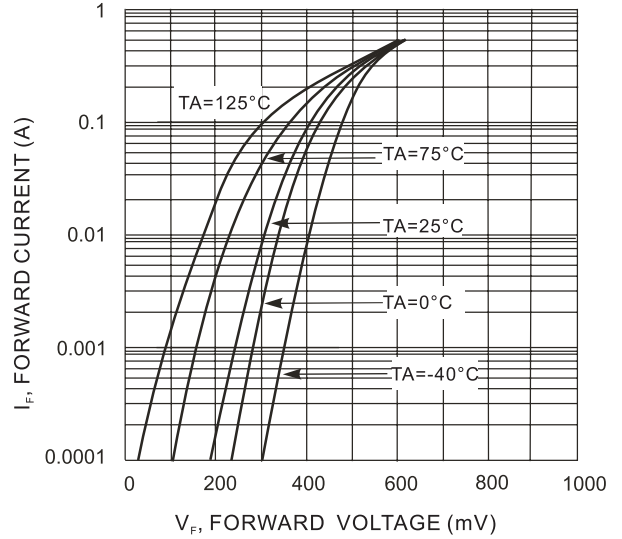


Fig. 3 TYPICAL JUNCTION CAPACITANCE VS REVERSE VOLTAGE


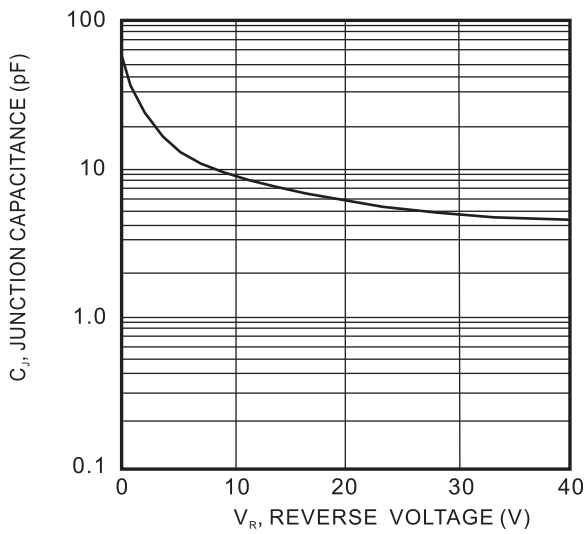




FIG. 4 TYPICAL REVERSE CHARACTERISTICS

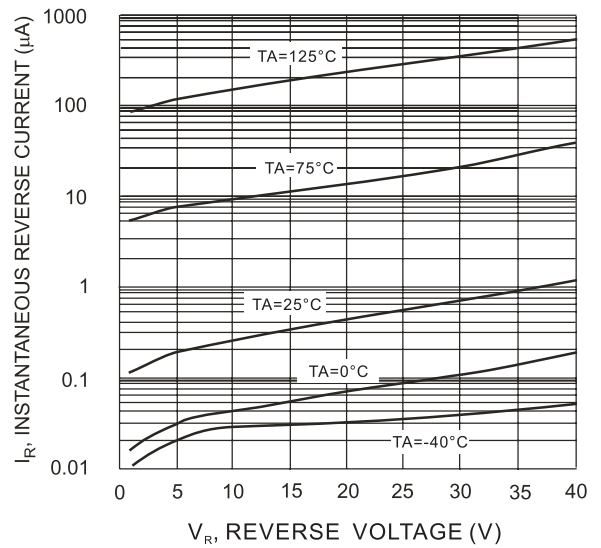

SD103AW / BW / CW


Pinning information

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

Marking

Type number	Marking code
SD103AW	S4
SD103BW	S5
SD103CW	S6

Suggested solder pad layout

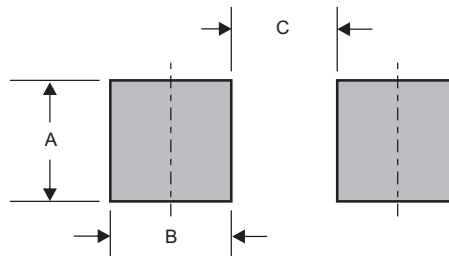

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SOD-123	0.059 (1.50)	0.059 (1.50)	0.094 (2.40)

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-123	7"	3,000	4.0	30,000	183*183*123	178	382*262*387	240,000	9.5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [AnBon](#) manufacturer:

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)