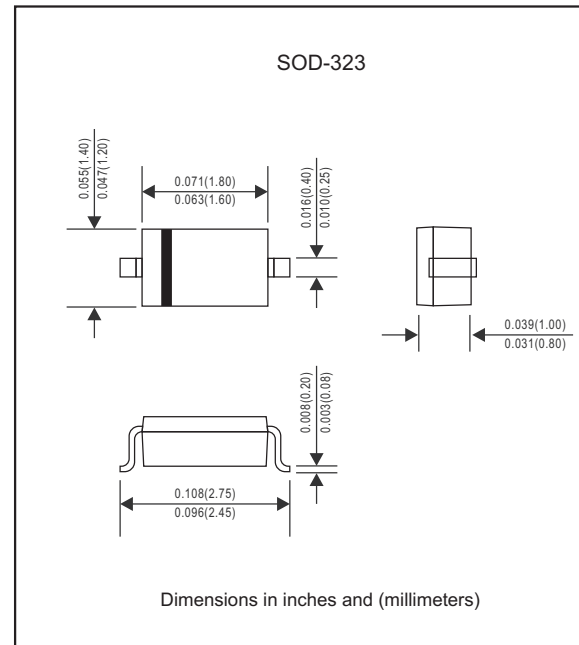


**SD103AWS / BWS / CWS****350mA Surface Mount  
Small Signal Schottky Diode-20V-40V****Package outline****Features**

- Low current rectification and high speed switching.
- Extremely small surface mount type.
- Low forward voltage drop.
- Silicon epitaxial planar chip, metal silicon junction.
- Lead-free parts for green partner, exceeds environmental standards of MIL-STD-19500 /228
- Compliant to Halogen-free

**Mechanical data**

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-323
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Mounting Position : Any
- Weight : Approximated 0.004 gram

**Maximum ratings** (AT  $T_A=25^\circ\text{C}$  unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	SD103AWS	SD103BWS	SD103CWS	UNIT
Peak repetitive reverse voltage Working peak reverse voltage DC blocking voltage		$V_{RRM}$ $V_{RWM}$ $V_R$	40	30	20	V
RMS reverse voltage		$V_{R(RMS)}$	28	21	14	V
Average rectified output current		$I_{F(AV)}$	350			mA
Non-repetitive peak forward surge current	@ $t < 1.0s$	$I_{FSM}$	1.5			A
Total device dissipation		$P_D$	200			mW
Thermal resistance	Junction to ambient	$R_{\theta JA}$	625			$^\circ\text{C}/\text{W}$
Operating temperature		$T_J$	-55 ~ +125			$^\circ\text{C}$
Storage temperature		$T_{STG}$	-65 ~ +125			$^\circ\text{C}$

**Electrical Characteristics**(AT  $T_A=25^\circ\text{C}$  unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Reverse breakdown voltage	$I_R = 100\mu\text{A}$ , SD103AWS $I_R = 100\mu\text{A}$ , SD103BWS $I_R = 100\mu\text{A}$ , SD103CWS	$V_{(BR)R}$	40 30 20			V
Forward voltage	$I_F = 20\text{mA}$ $I_F = 200\text{mA}$	$V_F$			0.37 0.60	V
Reverse current	$V_R = 30\text{V}$ , SD103AWS $V_R = 20\text{V}$ , SD103BWS $V_R = 10\text{V}$ , SD103CWS	$I_R$			5.0	$\mu\text{A}$
Typical Junction capacitance	$V_R = 0\text{V}$ , $f = 1.0\text{MHz}$	$C_J$		50		pF
Reverse recover time	$I_F = I_R = 200\text{mA}$ , $I_{tr} = 0.1 \times I_{R1}$ , $R_L = 100_{\text{OHM}}$	$t_{rr}$		10		ns

## Rating and characteristic curves (SD103AWS / BWS / CWS)

Fig. 1 POWER DERATING CURVE

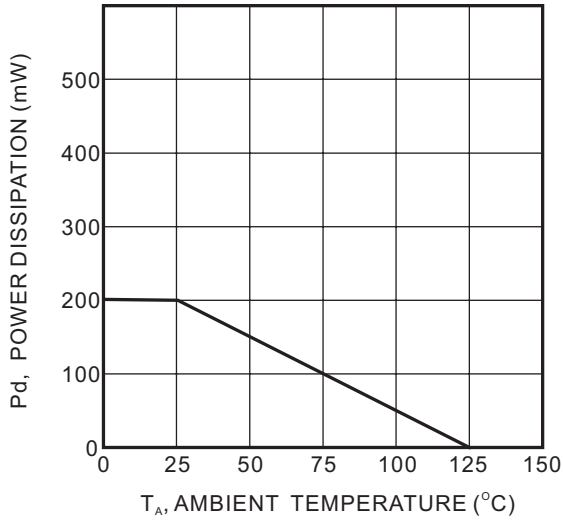


Fig. 2 TYPICAL FORWARD CHARACTERISTIC


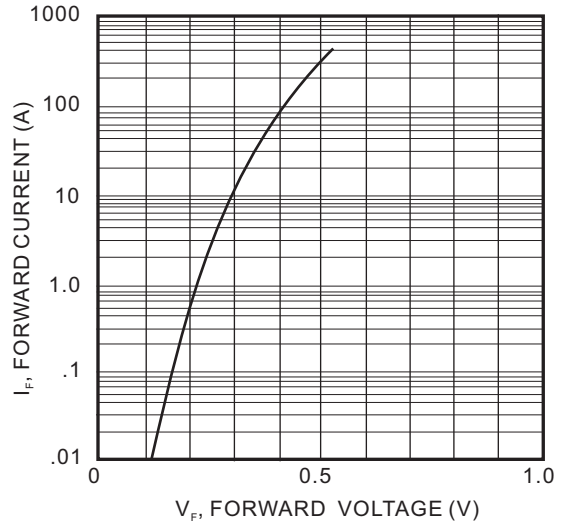




Fig. 3 TYPICAL JUNCTION CAPACITANCE VS REVERSE VOLTAGE

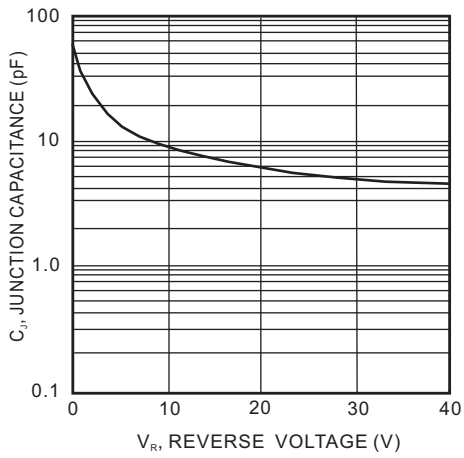

# SD103AWS / BWS / CWS


## Pinning information

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

## Marking

Type number	Marking code
SD103AWS	S4
SD103BWS	S5
SD103CWS	S6

## Suggested solder pad layout

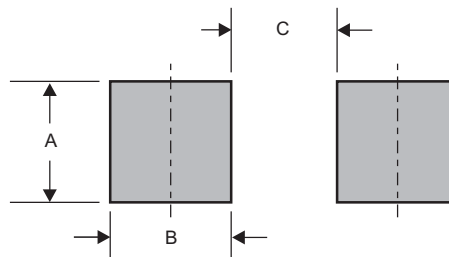

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SOD-323	0.033 (0.83)	0.025 (0.63)	0.063 (1.60)

## Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-323	7"	3000	4.0	30,000	195*195*150	178	460*400*420	360,000	14.8

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [AnBon](#) manufacturer:*

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)