

3.3Vdc CMOS SMD CRYSTAL CLOCK OSCILLATOR

ASE SERIES



RoHS
Compliant



3.2 x 2.5 x 1.0mm

FEATURES:

- Low height 1.0mm max
- Tri-state function
- Low current consumption 20mA max for 200MHz
- Low RMS jitter 5ps max
- Suitable for RoHS reflow
- Available for tight stability option

APPLICATIONS:

- CCD clock for VTR camera
- Equipment connected to PC or PC cards
- PDA, wireless communication.
- Laptop, SSD (Solid State Drive)

STANDARD SPECIFICATIONS:

PARAMETERS	
ABRACON P/N	ASE Series
Frequency Range	0.625 ~ 200 MHz
Operating Temperature	-10°C to + 70°C (See Options)
Storage Temperature	- 55° C to + 125° C
Overall Frequency Stability	± 100 ppm max. (see options)
Supply Voltage (Vdd)	3.3 V ± 5%
Input Current	See Table 1
Symmetry	45/55% @ 50%Vdd
Rise and Fall Time (Tr/Tf)	See Table 1
Output Load	15 pF max
Start-up time:	See Table 1
Output Voltage	VOH = 0.9* Vdd min., VOL = 0.1* Vdd max.
Tristate Function	"1" (VIH >= 0.7* Vdd) or open: Oscillation, "0" (VIL < 0.3 Vdd) : Hi Z
Peak to Peak Jitter	28ps (Typical) (Reference only. Contact ABRACON for the Jitter)
RMS Jitter	See Table 1
Stand-By Current	10 µA max.
Aging (first year):	±3 ppm max.

TABLE 1

Frequency (MHz)	I _{dd} mA (Typ)	I _{dd} mA (Max)	Tr/Tf ns (Typ)	Tr/Tf ns (max)	Start-up time ms (Typ)	Start-up time ms (Max)	RMS Jitter ps (Typ)	RMS Jitter ps (Max)
0.5 ~ 20	2.5	7	2.5	4.0	1	2.0	3.2	5
20.01 ~ 40.0	4.4	13	2.4	4.0	1	2.0	3.2	5
40.01 ~ 60.0	6.5	19	2.4	4.0	1	2.0	3.2	5
60.01 ~ 75.0	12.7	24	2.3	4.0	1	2.0	3.2	5
75.01 ~ 133.0	7.4	20	1.5	4.0	1.2	2.0	2.2	5
133.01 ~ 200.0	11.7	20	1.9	4.0	1.5	2.0	2.2	5

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

ASE - MHz - - -

Frequency in MHz
e.g. 0.625MHz
24.576MHz
14.31818MHz
26.000MHz
200.000MHz

Operating Temp.
I: 0°C ~ +50°C
D: -10°C ~ +60°C
E: -20°C ~ +70°C
F: -30°C ~ +70°C
N: -30°C ~ +85°C
L: -40°C ~ +85°C

Contact ABRACON for wider temperature range.

Freq. Stability
J*: ± 20 ppm
R: ± 25 ppm
K: ± 30 ppm
H: ± 35 ppm
B: ± 40 ppm
C: ± 50 ppm

*: Temp options I, D, E, and -10°C to +70°C only

Packaging
Blank: Bulk
T: Tape & Reel (1kpcs)
T2: Tape & Reel (250pcs)

ABRACON IS
ISO9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 06.24.10**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

3.3Vdc CMOS SMD CRYSTAL CLOCK OSCILLATOR

ASE SERIES



3.2 x 2.5 x 1.0mm

OUTLINE DRAWING:

Dimensions: Inches (mm)

- Top view: 0.126 ± 0.008 (3.2 ± 0.2)
- Side view: 0.098 ± 0.008 (2.5 ± 0.2)
- Bottom view: 0.039 (1.0), 0.0256 (0.65), 0.036 (0.9), 0.047 (1.2)
- Height: 0.039 max* (1.0) * Lower height is available

Recommended land pattern

- Pad width: 0.083 (2.10)
- Pad height: 0.065 (1.65)
- Pad spacing: 0.051 (1.3)
- Pad diameter: 0.043 (1.1)
- Capacitor value: 0.01uF

PIN	FUNCTION
1	Tri-state
2	GND/Case
3	Output
4	Vdd

It is recommended to use an approximately 0.01uF bypass capacitor between PIN 2 and PIN 4.

Note: The outline package configuration varies with frequency range. Electrical properties, pin configuration, and land pattern are the same.


TAPE & REEL: T= tape and reel (1,000pcs/reel)

Dimensions: mm

FEEDING (PULL) DIRECTION →

- Carrier width: 8.0 ± 0.2
- Carrier pitch: 2.0 ± 0.06
- Carrier hole diameter: 1.5
- Carrier hole spacing: 4.0 ± 0.1
- Carrier hole offset: 1.75 ± 0.1
- Carrier hole diameter: 1.0
- Carrier hole offset: 0.25 ± 0.05
- Carrier hole diameter: 1.25 ± 0.1
- Carrier hole diameter: 3.6 ± 0.1
- Carrier hole diameter: 3.5 ± 0.5
- Carrier hole diameter: 2.9 ± 0.1
- Carrier hole diameter: 9.5 ± 0.5
- Carrier hole diameter: 1.6 ± 0.2
- Carrier hole diameter: 13.0 ± 0.5
- Carrier hole diameter: 2 ± 0.5
- Carrier hole diameter: 178 ± 1
- Carrier hole diameter: 21 ± 0.8
- Carrier hole diameter: 60
- Carrier hole diameter: 120°

REFLOW PROFILE

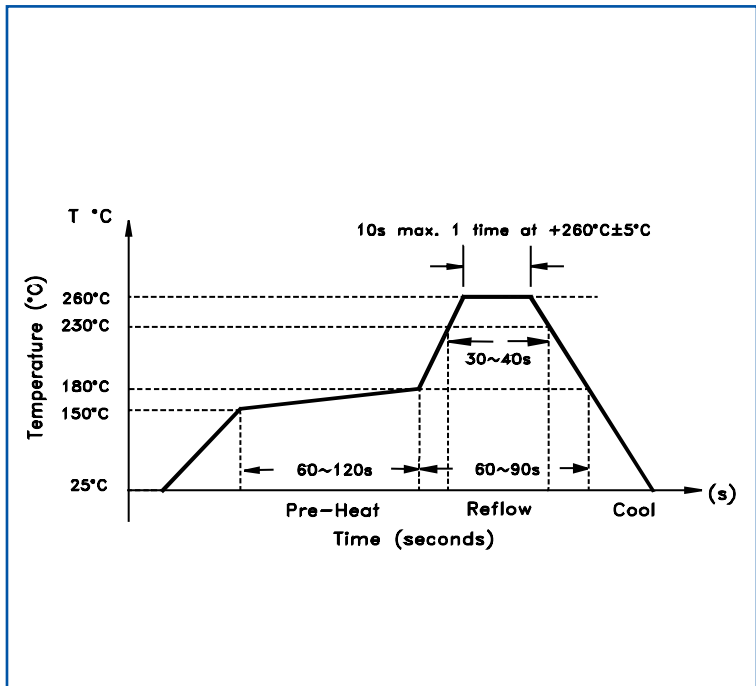

Need a test socket for the ASE Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, [click here](#).

NOTE: Abracon manufactured products are intended for general commercial and industrial use. For applications requiring high reliability and/or presenting extreme operating environment, written consent & authorization from Abracon is required.

ABRACON IS ISO9001:2008 CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 06.24.10**
 30332 Esperanza, Rancho Santa Margarita, California 92688
 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#) [XLH735025.000JU4I8](#) [XLP725125.000JU6I8](#) [XO37CTECNA10M](#) [XO57CRECNA16M](#)