


Eveready Silver 9V (6F22)

9V



Industry Standard Dimensions

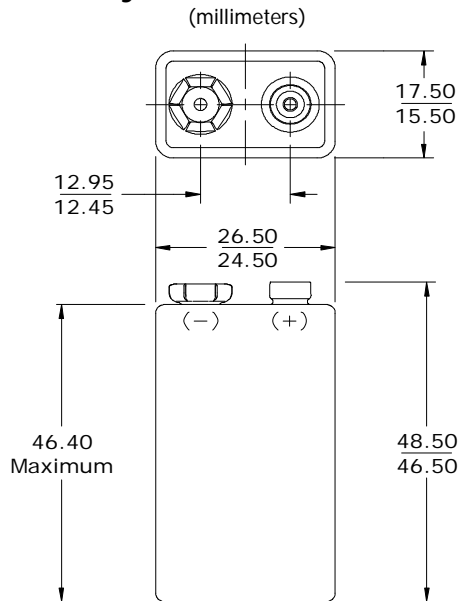

Specifications


Classification:	"Carbon Zinc" (Zinc Chloride)
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No Added Mercury or Cadmium
Designation:	IEC-6F22
Nominal Voltage:	9.0 volts
Typical Capacity:	400 mAh* (to 4.8 volts)
Capacity Test:	5 mA continuous drain (21°C)

* Varies according to the applied load, temperature, and cutoff voltage.

Operating Temp:	-5°C to 55°C
Typical Weight:	37 grams
Typical Volume:	20.3 cubic centimeters
Jacket:	Metal

Storage/Capacity Characteristics


Effects of Storage at Various Temperatures

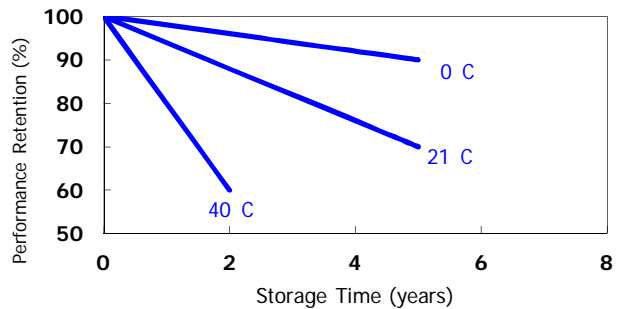

Industry Standard Tests (21°C)


RADIO

620 ohm 2 hrs/day

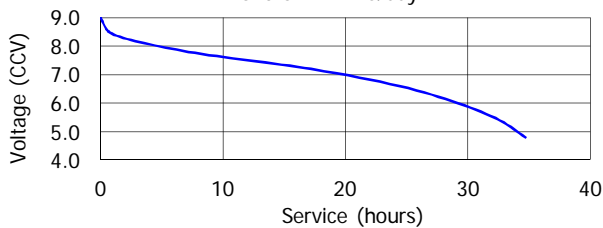


TOY

270 ohm 1 hr/day

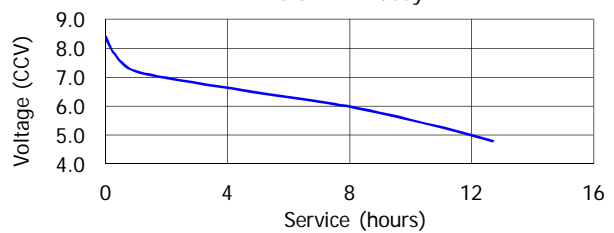

CALCULATOR

180 ohm 0.5 hr/day

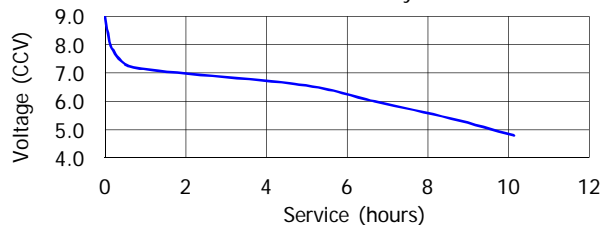

Important Notice

This datasheet contains information specific to battery chargers manufactured at the time of its publication.
© Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Battery Packs](#) category:

Click to view products by [Energizer](#) manufacturer:

Other Similar products are found below :

[2280309-1](#) [R101-B](#) [4114 210 501](#) [4120 210 501](#) [4600 726 406](#) [4610 726 406](#) [312G-U1](#) [55615703012](#) [3LR12](#) [4103 210 392](#) [4103 210 394](#)
[4106 210 392](#) [4106 210 394](#) [4223 210 501](#) [4606 726 406](#) [4607 726 406](#) [ZA13](#) [LR03/AAA/MN2400\(K4\)](#) [LR03 MAXELL S4](#) [LR1130](#)
[MAXELL B10](#) [LR14-MN1400-C K2](#) [LR1/910A](#) [LR41 MAXELL B10](#) [LR43](#) [LR43 MAXELL B10](#) [LR6 MAXELL S4](#) [11012](#) [E23A](#) [E90](#)
[625302](#) [625304](#) [637871](#) [638006](#) [6LF22/9V/MN1604\(K1\)C&B](#) [6LF22/9V/MN1604 PLUS](#) [6LR61](#) [SR626SW MAXELL](#) [SR920SW](#)
[MAXELL](#) [7K67 J](#) [55615303059](#) [GP14A S2](#) [GP15E](#) [GP1604GLF-2UE1](#) [GP 1604 ULTRA PLUS](#) [23733](#) [10 ET](#) [675 ET](#) [11A B5](#) [A544](#) [A76-](#)
[U10](#)