

32.768kHz CERAMIC SMD CRYSTAL OSCILLATOR

ASFLK SERIES



5.0 x 3.2 x 1.3mm



FEATURES:

- Pb-Free/RoHS Compliant
- IR reflow capable
- Tri state function
- Seam sealed ceramic package
- Suitable for high density SMT

APPLICATIONS:

- CCD clock for VTR camera
- Computers and peripherals
- Portable MP3 players and games

STANDARD SPECIFICATIONS:

PARAMETERS	
ABRACON P/N:	ASFLK Series
Frequency range:	32.768kHz
Operating temperature:	0°C to +70°C (see options)
Storage temperature:	-55°C to +125°C
Overall Frequency Stability:	± 100ppm max. (see options)
Supply Voltage (Vdd):	3.3 Vdc ± 10% (see options)
Supply current:	Vdd = 2.5 ~ 3.3V, 0.5mA typ. 1.0mA max. Vdd = 5.0V, 1.5mA typ. 5.0mA max.
Symmetry:	40/60 % max.@ 1/2Vdd (see options)
Rise and fall time (Tr/Tf):	250 ns max.
Output Load:	15pF or 10TTL max.
Output Voltage:	VOH = 2.97V min. VOL = 0.33V max.
Start-up-time	30ms max.
Tristate function:	Logic "1" or open: Oscillation Logic "0" (VIL < 0.8 Vdc) : Hi Z
Aging at 25°C/year :	± 3ppm/year max.
Phase jitter:	1ps RMS max.

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

ASFLK-□ - 32.768kHz - □ - □ - □ - □

Supply Voltage	
Blank	3.3V±10%
1	3.0V±10%
2	2.5V±10%
4	5.0V±10%

Operating Temp.	
E	-20°C to +70°C
F	-30°C to +70°C
N	-30°C to +85°C
L	-40°C to +85°C

*Contact ABRACON for extended temperature range.

Packaging	
T	Tape and Reel

Symmetry	
S	45/55% max at 1/2Vdd

Freq. Stability	
J	±20ppm
R	±25ppm
K	±30ppm
H	±35ppm
B	±40ppm
C	±50ppm

32.768kHz CERAMIC SMD CRYSTAL OSCILLATOR



ASFLK

5.0 x 3.2 x 1.3mm

ASFLK SERIES



OUTLINE DRAWING:

Dimensions: Inches (mm)

Recommended Land Pattern


PIN	FUNCTION
1	Tri-state
2	GND
3	Output
4	Vdd

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.

TAPE & REEL: Tape and reel (1,000pcs/reel)

Dimensions:mm

REFLOW PROFILE

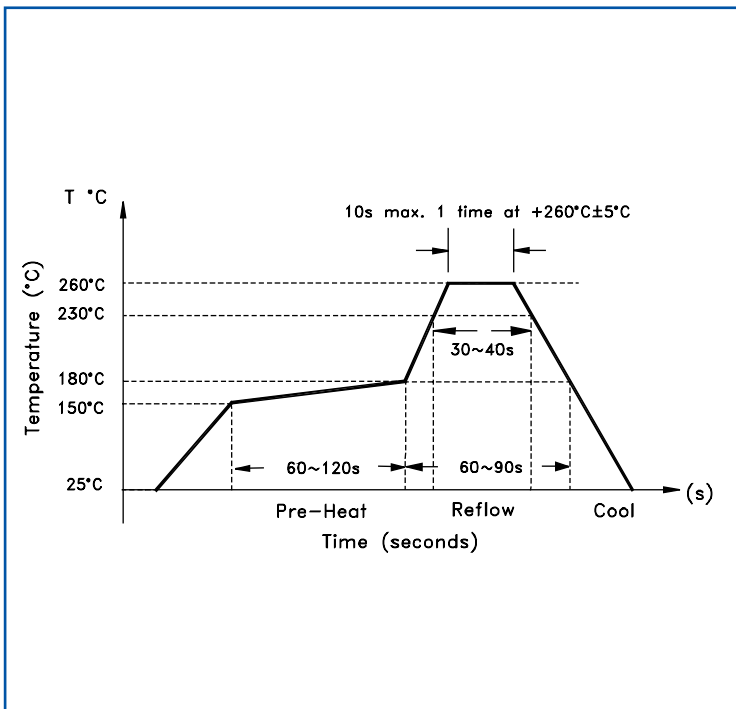

Need a test socket for the ASFLK series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, [click here](#).

*** NOTE:** Abracon manufactured products are intended for general commercial and industrial use. For applications requiring high reliability and/or presenting extreme operating environment, written consent & authorization from Abracon is required.

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 09.14.09**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [F535L-50](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [NBXDBB017LN1TAG](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#)