


B



M28840/9
45° EMI/RFI Environmental Backshell

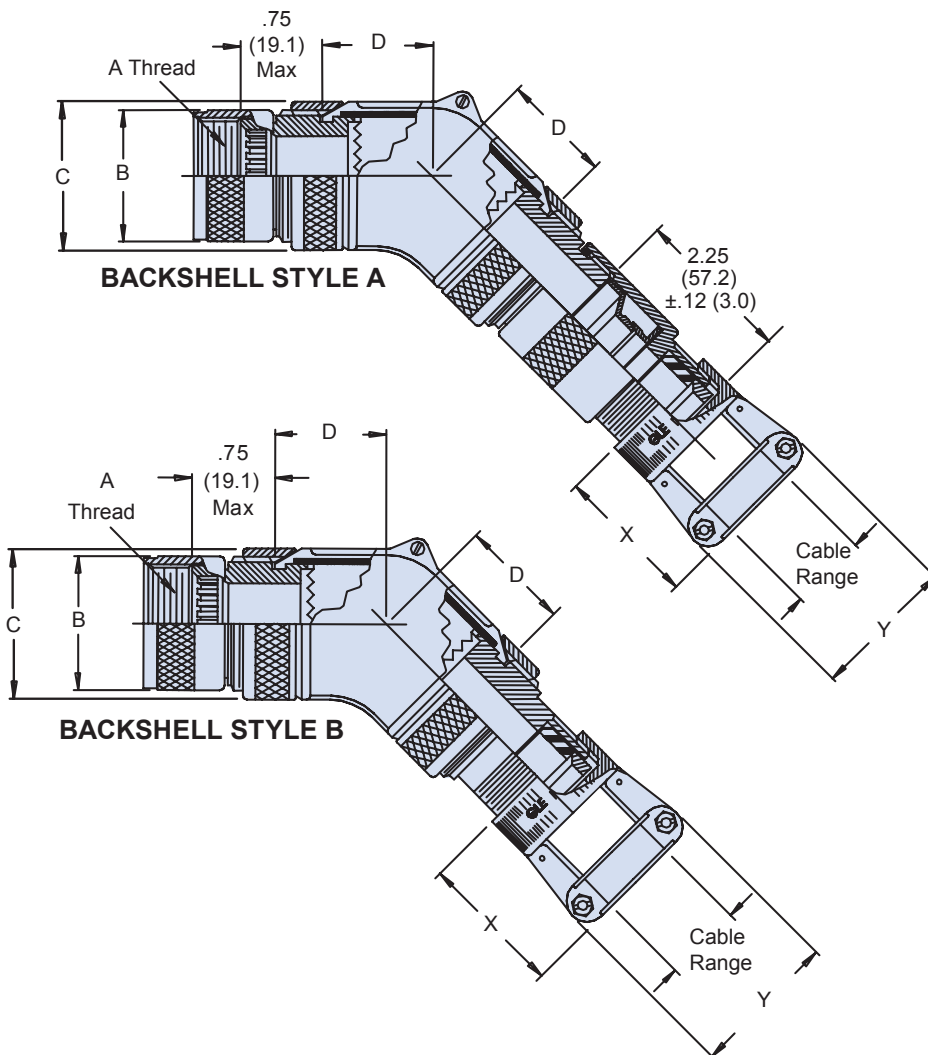

MIL-DTL
28840

B

| Backshell Size | Dash Number | Designator | A Thread | B Max. Diameter | C Max. Diameter | D Max. |
|----------------|-------------|------------|---------------|-----------------|-----------------|---------------|
| A | 01 | A (11) | .750-20 UNEF | 1.028 (26.11) | 1.188 (30.18) | 1.031 (26.19) |
| A | 02 | B (13) | .875-20 UNEF | 1.141 (28.98) | | |
| B | 03 | B (13) | | | | |
| A | 04 | C (15) | 1.00-20 UNEF | 1.263 (32.08) | 1.438 (36.53) | 1.156 (29.36) |
| B | 05 | C (15) | | | | |
| C | 06 | C (15) | | | | |
| D | 07 | C (15) | | | | |
| A | 08 | D (17) | 1.125-18 UNEF | 1.387 (35.23) | 1.688 (42.88) | 1.281 (32.54) |
| B | 09 | D (17) | | | | |
| C | 10 | D (17) | | | | |
| A | 11 | E (19) | 1.250-18 UNEF | 1.513 (38.43) | 1.938 (49.23) | 1.406 (35.71) |
| B | 12 | E (19) | | | | |
| A | 13 | F (23) | 1.438-18 UNEF | 1.703 (43.51) | 1.938 (49.23) | 1.406 (35.71) |
| B | 14 | F (23) | | | | |
| C | 15 | F (23) | | | | |
| A | 16 | G (25) | 1.562-18 UNEF | 1.825 (46.35) | 2.188 (55.58) | 1.531 (38.89) |
| B | 17 | G (25) | | | | |
| C | 18 | G (25) | | | | |
| D | 19 | G (25) | | | | |
| A | 20 | H (29) | 1.875-16 UN | 2.143 (54.43) | 2.188 (55.58) | 1.531 (38.89) |
| B | 21 | H (29) | | | | |

B

| Backshell Size | Dash Number | Designator | Cable Range | | E Max. Dim. | F Max. Style A | H Max. Style B |
|----------------|-------------|------------|---------------|---------------|----------------|----------------------|----------------------|
| | | | Max. | Min. | | | |
| A | 01 | A (11) | .312 (7.92) | .188 (4.77) | 1.156 (29.36) | 5.879 (149.33) | 4.199 (106.65) |
| A | 02 | B (13) | .312 (7.92) | .188 (4.77) | | 5.879 (149.33) | 4.199 (106.65) |
| B | 03 | B (13) | .438 (11.12) | .281 (7.14) | | 5.932 (150.67) | 4.252 (108.00) |
| A | 04 | C (15) | .312 (7.92) | .188 (4.77) | 1.281 (32.54) | 6.092 (154.74) | 4.412 (112.06) |
| B | 05 | C (15) | .438 (11.12) | .281 (7.14) | | 6.146 (156.11) | 4.466 (113.44) |
| C | 06 | C (15) | .562 (14.27) | .344 (8.74) | | 6.202 (157.53) | 4.522 (114.86) |
| D | 07 | C (15) | .750 (19.05) | .438 (11.12) | 1.406 (35.71) | 6.533 (165.94) | 4.853 (123.27) |
| A | 08 | D (17) | .625 (15.87) | .375 (9.82) | | 6.413 (162.89) | 4.733 (120.22) |
| B | 09 | D (17) | .750 (19.05) | .438 (11.12) | | 6.533 (165.94) | 4.853 (123.27) |
| C | 10 | D (17) | .938 (23.82) | .625 (15.87) | 1.531 (38.89) | 6.636 (168.55) | 4.956 (125.88) |
| A | 11 | E (19) | .625 (15.87) | .375 (9.52) | 1.406 (35.71) | 6.413 (162.89) | 4.733 (120.22) |
| B | 12 | E (19) | .938 (23.82) | .625 (15.87) | 1.531 (38.89) | 6.846 (173.89) | 5.166 (131.22) |
| A | 13 | F (23) | .750 (19.05) | .438 (11.12) | 1.406 (25.71) | 6.747 (171.37) | 5.067 (128.70) |
| B | 14 | F (23) | .938 (23.82) | .625 (15.87) | 1.531 (38.89) | 6.846 (173.89) | 5.166 (131.22) |
| C | 15 | F (23) | 1.188 (30.17) | .812 (20.62) | 1.781 (45.24) | 7.103 (180.42) | 5.423 (138.23) |
| A | 16 | G (25) | .938 (23.82) | .625 (15.87) | 1.531 (38.89) | 6.846 (173.89) | 5.156 (130.96) |
| B | 17 | G (25) | 1.188 (30.17) | .812 (20.62) | 1.781 (45.24) | 7.103 (180.42) | 5.4239 (138.23) |
| C | 18 | G (25) | 1.250 (31.75) | .875 (22.23) | | 7.316 (185.83) | 5.636 (143.15) |
| D | 19 | G (25) | 1.380 (35.05) | 1.000 (25.40) | 2.156 (54.76) | 7.425 (188.60) | 5.745 (145.92) |
| A | 20 | H (29) | 1.188 (30.17) | .812 (20.62) | 1.781 (45.24) | 7.316 (185.83) | 5.636 (143.15) |
| B | 21 | H (29) | 1.380 (35.05) | 1.000 (25.40) | 2.156 (54.76) | 7.425 (188.60) | 5.745 (145.92) |

M28840/9 45° EMI/RFI Environmental Backshell



MIL-DTL
28840

| Backshell Size | Dash Number | Designator | V Thread Class | X Ref. Dimension | Y Ref. Dimension |
|----------------|-------------|------------|----------------|------------------|------------------|
| A | 01 | A (11) | .625-24 UNEF | 1.281 (32.54) | .938 (23.82) |
| A | 02 | B (13) | .625-24 UNEF | | .938 (23.82) |
| B | 03 | B (13) | .750-20 UNEF | | 1.125 (28.57) |
| A | 04 | C (15) | .625-24 UNEF | | .938 (23.82) |
| B | 05 | C (15) | .750-20 UNEF | | 1.125 (28.57) |
| C | 06 | C (15) | .875-20 UNEF | | 1.312 (33.32) |
| D | 07 | C (15) | 1.188-18 UNEF | 1.312 (33.32) | 1.593 (40.62) |
| A | 08 | D (17) | 1.000-20 UNEF | 1.281 (32.54) | 1.312 (33.32) |
| B | 09 | D (17) | 1.188-18 UNEF | 1.312 (33.32) | 1.593 (40.62) |
| C | 10 | D (17) | 1.438-18 UNEF | 1.406 (35.71) | 1.750 (44.45) |
| A | 11 | E (19) | 1.000-20 UNEF | 1.281 (32.54) | 1.312 (33.32) |
| B | 12 | E (19) | 1.438-18 UNEF | 1.406 (35.71) | 1.750 (44.45) |
| A | 13 | F (23) | 1.188-18 UNEF | 1.312 (33.32) | 1.593 (40.62) |
| B | 14 | F (23) | 1.438-18 UNEF | 1.406 (35.71) | 1.750 (44.45) |
| C | 15 | F (23) | 1.750-18 UNS | 1.593 (40.46) | 2.093 (53.16) |
| A | 16 | G (25) | 1.438-18 UNEF | 1.406 (35.71) | 1.750 (44.45) |
| B | 17 | G (25) | 1.750-18 UNS | 1.593 (40.46) | 2.093 (53.16) |
| C | 18 | G (25) | 1.750-18 UNS | 1.593 (40.46) | 2.093 (53.16) |
| D | 19 | G (25) | 2.000-16 UNS | 1.625 (41.28) | 2.343 (59.51) |
| A | 20 | H (29) | 1.750-18 UNS | 1.593 (40.46) | 2.093 (53.16) |
| B | 21 | H (29) | 2.000-18 UNS | 1.625 (41.28) | 2.343 (59.51) |

B



M28840/9
45° EMI/RFI Environmental Backshell

| Backshell Size | Dash Number | Designator | A Thread | B Max. Diameter | C Max. Diameter | D Max. |
|----------------|-------------|------------|---------------|-----------------|-----------------|---------------|
| A | 22 | J (33) | 2.062-16 UNEF | 2.329 (59.16) | 2.688 (68.28) | 1.781 (45.24) |
| B | 23 | J (33) | | | | |
| B | 24 | A (11) | .750-20 UNEF | 1.028 (26.11) | 1.188 (30.18) | 1.031 (26.19) |
| C | 25 | A (11) | | | 1.438 (36.53) | 1.156 (29.36) |
| C | 26 | B (13) | .875-20 UNEF | 1.141 (28.98) | 1.438 (36.53) | 1.156 (29.36) |
| D | 27 | B (13) | | | | |
| E | 28 | C (15) | 1.000-20 UNEF | 1.263 (32.08) | 1.688 (42.88) | 1.281 (32.54) |

B

| Backshell Size | Dash Number | Designator | Cable Range | | E Max. Dimension | F Max. Style A | H Max. Style B |
|----------------|-------------|------------|---------------|---------------|------------------|----------------|----------------|
| | | | Max. | Min. | | | |
| A | 22 | J (33) | 1.380 (35.05) | 1.000 (25.40) | 2.281 (57.94) | 7.852 (199.44) | 6.127 (156.77) |
| B | 23 | J (33) | 1.625 (41.28) | 1.250 (31.75) | | 6.454 (163.93) | 6.454 (163.93) |
| B | 24 | A (11) | .438 (11.12) | .281 (7.14) | 1.156 (29.36) | 5.932 (150.67) | 4.252 (108.00) |
| C | 25 | A (11) | .562 (14.27) | .344 (8.74) | 1.281 (32.54) | 6.202 (157.53) | 4.522 (114.86) |
| C | 26 | B (13) | .562 (14.27) | .344 (8.74) | 1.281 (32.54) | 6.202 (157.53) | 4.522 (114.86) |
| D | 27 | B (13) | .625 (15.87) | .375 (9.52) | 1.406 | 6.413 (162.89) | 4.733 (120.22) |
| E | 28 | C (15) | .625 (15.87) | .375 (9.50) | | 6.413 (162.89) | 4.733 (120.22) |

| Backshell Size | Dash Number | Designator | V Thread Class | X Ref. Dimension | Y Ref. Dimension |
|----------------|-------------|------------|----------------|------------------|------------------|
| A | 22 | J (33) | 2.000-18 UNS | 1.625 (41.28) | 2.343 (59.51) |
| B | 23 | J (33) | 2.250-16 UNS | 1.900 (48.26) | 2.750 (69.85) |
| B | 24 | A (11) | .750-20 UNEF | 1.281 (32.54) | 1.125 (28.57) |
| C | 25 | A (11) | .875-20 UNEF | | |
| C | 26 | B (13) | .875-20 UNEF | | |
| D | 27 | B (13) | 1.000-20 UNEF | | |
| E | 28 | C (15) | 1.000-20 UNEF | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Backshells](#) category:

Click to view products by [Glenair](#) manufacturer:

Other Similar products are found below :

[173114-0084](#) [173112-1658](#) [600X51137X](#) [600X54009X](#) [66241-12A](#) [M85049/48-1-2](#) [M85049/48-3-5F](#) [M85049/6-38N](#) [M85049/86-12N03](#)
[70.350.0636.4](#) [70.350.2435.1](#) [72.350.1035.2](#) [72.352.2435.1](#) [73.359.4035.3](#) [799-015TMH07M](#) [799-015TMH08N](#) [FKH1RE](#) [829472-1](#) [F-](#)
[PHG-1E](#) [F-PHG-3E](#) [F-PHG-4E](#) [F-PHR-4E](#) [PCS-E20W](#) [8655MHRA0901KLF](#) [8655MHRA2501KLF](#) [958-009-010R011](#) [970-015-040R011](#)
[970-025-030R121](#) [970-025-040R011](#) [971-009-030R121](#) [971-009-040R011](#) [971-015-040R011](#) [971-025-040R011](#) [GS85049/38-25M](#) [975T009-](#)
[020R121](#) [975T015-020R121](#) [1-21986-2](#) [1-21986-5](#) [DB-20962](#) [DE-C8-J9-F4-1R](#) [DE-C8-J9-F5-1R](#) [DPH-B-003](#) [1437013-9](#) [1484402-8](#)
[MS3057-10A](#) [156-3025-EX](#) [MS3417-16C](#) [16-500800](#) [165X02659X](#) [165X03329A](#)