

# DATA SHEET

**E32/16/9**

**E cores and accessories**

Supersedes data of September 2004

2008 Sep 01




**FERROXCUBE**  
A YAGEO COMPANY

**CORE SETS**

**Effective core parameters**

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(l/A)$	core factor (C1)	0.894	mm <sup>-1</sup>
$V_e$	effective volume	6180	mm <sup>3</sup>
$l_e$	effective length	74	mm
$A_e$	effective area	83	mm <sup>2</sup>
$A_{min}$	minimum area	83	mm <sup>2</sup>
m	mass of core half	≈ 16	g

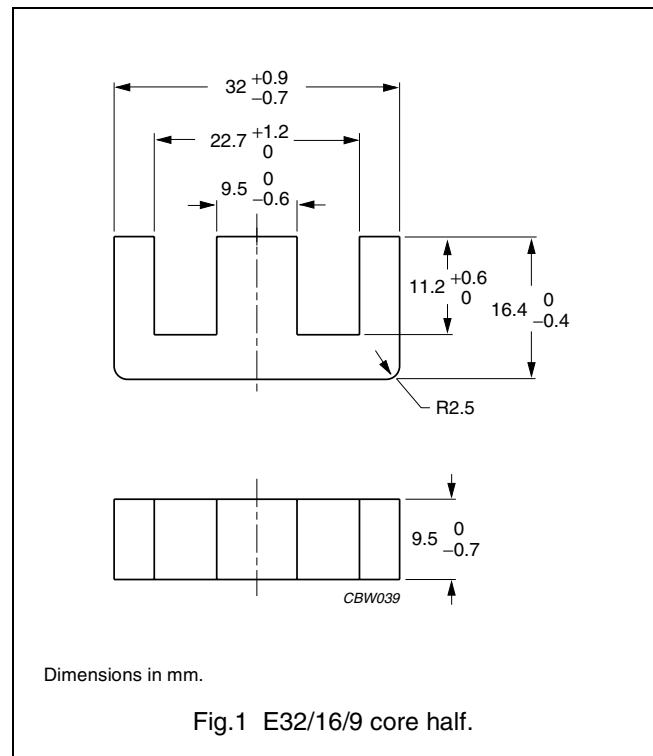

**Core halves**

$A_L$  measured in combination with a non-gapped core half, clamping force for  $A_L$  measurements  $40 \pm 20$  N, unless stated otherwise.

GRADE	$A_L$ (nH)	$\mu_e$	TOTAL AIR GAP ( $\mu\text{m}$ )	TYPE NUMBER
3C90	$100 \pm 5\%^{(1)}$	≈ 71	≈ 1600	E32/16/9-3C90-E100
	$160 \pm 5\%^{(1)}$	≈ 114	≈ 860	E32/16/9-3C90-E160
	$250 \pm 5\%$	≈ 177	≈ 480	E32/16/9-3C90-A250
	$315 \pm 5\%$	≈ 223	≈ 360	E32/16/9-3C90-A315
	$400 \pm 8\%$	≈ 284	≈ 260	E32/16/9-3C90-A400
	$630 \pm 15\%$	≈ 447	≈ 150	E32/16/9-3C90-A630
	$2500 \pm 25\%$	≈ 1770	≈ 0	E32/16/9-3C90
3C92 <span style="background-color: black; color: white; padding: 0 2px;">des</span>	$1850 \pm 25\%$	≈ 1320	≈ 0	E32/16/9-3C92
3C94	$2500 \pm 25\%$	≈ 1770	≈ 0	E32/16/9-3C94
3C96 <span style="background-color: black; color: white; padding: 0 2px;">des</span>	$2300 \pm 25\%$	≈ 1630	≈ 0	E32/16/9-3C96

GRADE	$A_L$ (nH)	$\mu_e$	TOTAL AIR GAP ( $\mu\text{m}$ )	TYPE NUMBER
3F3	$100 \pm 5\%^{(1)}$	$\approx 71$	$\approx 1600$	E32/16/9-3F3-E100
	$160 \pm 5\%^{(1)}$	$\approx 114$	$\approx 860$	E32/16/9-3F3-E160
	$250 \pm 5\%$	$\approx 177$	$\approx 480$	E32/16/9-3F3-A250
	$315 \pm 5\%$	$\approx 223$	$\approx 360$	E32/16/9-3F3-A315
	$400 \pm 8\%$	$\approx 284$	$\approx 260$	E32/16/9-3F3-A400
	$630 \pm 15\%$	$\approx 447$	$\approx 150$	E32/16/9-3F3-A630
	$2300 \pm 25\%$	$\approx 1630$	$\approx 0$	E32/16/9-3F3
3F35 <span style="border: 1px solid black; padding: 0 2px;">des</span>	$1700 \pm 25\%$	$\approx 1210$	$\approx 0$	E32/16/9-3F35

1.  $A_L$  measured in combination with a equal gapped core half.

#### Properties of core sets under power conditions

GRADE	B (mT) at	CORE LOSS (W) at			
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 25 kHz; $\hat{B} = 200$ mT; T = 100 °C	f = 100 kHz; $\hat{B} = 100$ mT; T = 100 °C	f = 100 kHz; $\hat{B} = 200$ mT; T = 100 °C	f = 400 kHz; $\hat{B} = 50$ mT; T = 100 °C
3C90	$\geq 330$	$\leq 0.65$	$\leq 0.7$	–	–
3C92	$\geq 370$	–	$\leq 0.55$	$\leq 3.2$	–
3C94	$\geq 330$	–	$\leq 0.55$	$\leq 3.2$	–
3C96	$\geq 340$	–	$\leq 0.43$	$\leq 2.5$	–
3F3	$\geq 320$	–	$\leq 0.75$	–	$\leq 1.3$
3F35	$\geq 300$	–	–	–	–


#### Properties of core sets under power conditions (continued)

GRADE	B (mT) at	CORE LOSS (W) at			
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 500 kHz; $\hat{B} = 50$ mT; T = 100 °C	f = 500 kHz; $\hat{B} = 100$ mT; T = 100 °C	f = 1 MHz; $\hat{B} = 30$ mT; T = 100 °C	f = 3 MHz; $\hat{B} = 10$ mT; T = 100 °C
3C90	$\geq 330$	–	–	–	–
3C92	$\geq 370$	–	–	–	–
3C94	$\geq 330$	–	–	–	–
3C96	$\geq 340$	$\leq 2.3$	–	–	–
3F3	$\geq 320$	–	–	–	–
3F35	$\geq 300$	$\leq 0.83$	$\leq 6.5$	–	–

**COIL FORMER**

**General data for 12-pins E32/16/9 coil former**

PARAMETER	SPECIFICATION
Coil former material	polyamide (PA6.6), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E41871(M)
Pin material	copper-tin alloy (CuSn), tin (Sn) plated
Maximum operating temperature	130 °C, "IEC 60085", class B
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B: 350 °C, 3.5 s
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1: 235 °C, 2 s

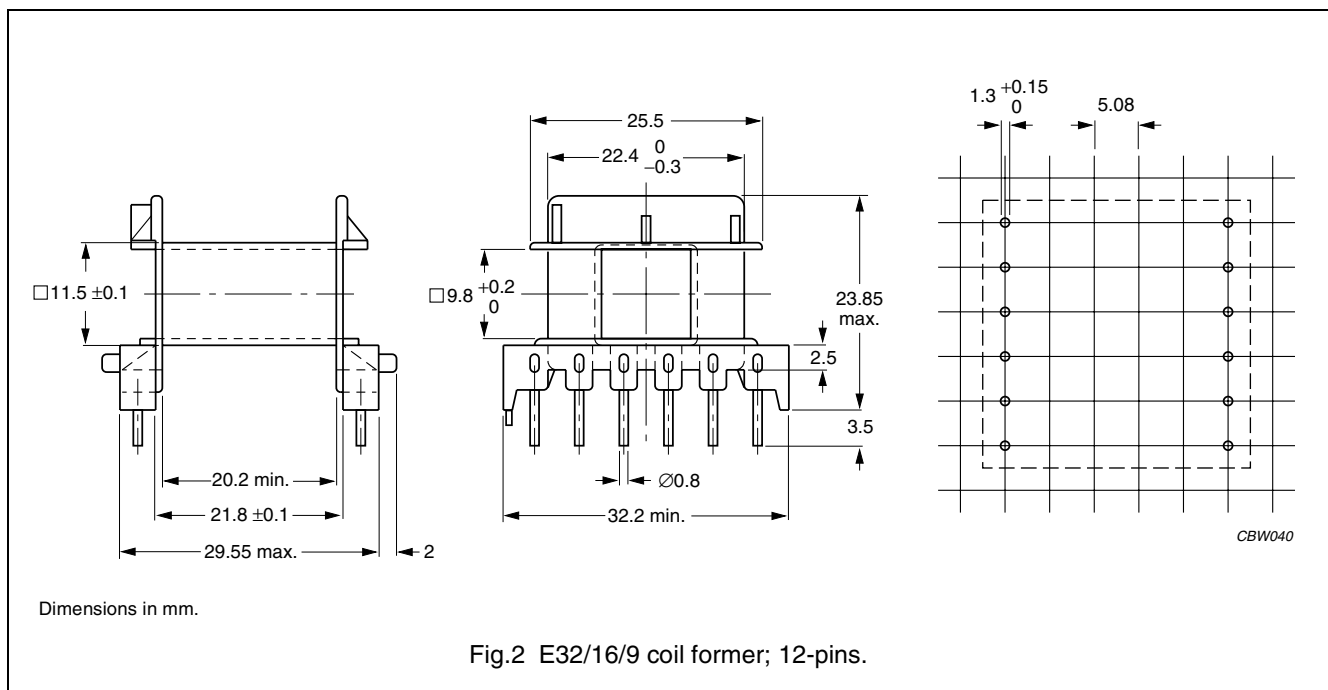

**Winding data and area product for 12-pins E32/16/9 coil former**

NUMBER OF SECTIONS	WINDING AREA (mm <sup>2</sup> )	MINIMUM WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	AREA PRODUCT Ae x Aw (mm <sup>4</sup> )	TYPE NUMBER
1	97	20.2	60	8050	CPH-E32/16/9-1S-12P

**DATA SHEET STATUS DEFINITIONS**

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

**DISCLAIMER**

**Life support applications** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

**PRODUCT STATUS DEFINITIONS**

STATUS	INDICATION	DEFINITION
<b>Prototype</b>		These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
<b>Design-in</b>		These products are recommended for new designs.
<b>Preferred</b>		These products are recommended for use in current designs and are available via our sales channels.
<b>Support</b>		These products are <b>not</b> recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ferrite Cable Cores](#) category:*

*Click to view products by [Ferroxcube](#) manufacturer:*

Other Similar products are found below :

[2643626102](#) [FX28R0984-0](#) [FX28R0984-2](#) [AB 3X2X3SM](#) [2643164251](#) [2643665709](#) [2661626402](#) [LB 2.8X4.5U](#) [28R1127](#) [28R1260](#)  
[28R1575](#) [SM28R0760](#) [SM28R1531](#) [2631006302](#) [2643165451](#) [2643178351](#) [28R0760](#) [MS 21X14X4.5 W](#) [SM28B1101](#) [SS7X4X3W](#) [4327](#)  
[030 16141](#) [ASSE017-2](#) [2643103102](#) [2643164151](#) [2943666671](#) [4327 030 12611](#) [2643163851](#) [AB4X2X6SM](#) [432703013631](#) [LB4X2X8U](#)  
[28B1101](#) [28B0785](#) [SM28R1575](#) [SM28R1260](#) [74270051](#) [2643625902](#) [74278032](#) [2643480009](#) [2673069901](#) [HFB123049-300](#) [HFB143064-](#)  
[100](#) [HFB143064-300](#) [HFB170070-000](#) [ETD29/16/10-3C94](#) [ETD29-3F3](#) [ETD39-3C94](#) [RFP1-20-10-A5](#) [RFP1-40-28-M-A5](#) [RFP2-10-10-A5](#)  
[RFP2-25-12-A5](#)