



THIRD ANGLE PROJECTION

ITEM CODE	RATED VOLTAGE	CAP. (μ F)	DIMENSIONS			
			※L	※T	※H	※d
ECQE2103 () F3	250VDC	0.01	10.3	4.3	7.4	0.6
" 2123 () F3	"	0.012	"	4.4	7.5	"
" 2153 () F3	"	0.015	"	"	"	"
" 2183 () F3	"	0.018	"	"	"	"
" 2223 () F3	"	0.022	"	"	"	"
" 2273 () F3	"	0.027	"	"	"	"
" 2333 () F3	"	0.033	"	4.5	"	"
" 2393 () F3	"	0.039	"	"	"	"
" 2473 () F3	"	0.047	"	"	"	"
" 2563 () F3	"	0.056	"	4.8	7.9	"
" 2683 () F3	"	0.068	"	4.5	7.5	"
" 2823 () F3	"	0.082	"	4.9	8.0	"
" 2104 () F3	"	0.1	"	5.8	8.4	"
" 2124 () F3	"	0.12	"	6.0	9.0	"
" 2154 () F3	"	0.15	"	"	10.8	"
" 2184 () F3	"	0.18	12.0	5.0	10.3	"
" 2224 () F3	"	0.22	"	5.5	10.5	"
" 2274 () F3	"	0.27	"	6.0	11.5	"

TOL. SYMBOL (J or K)

ITEM CODE NUMBER STRUCTURE

ECQE 2103KF3 (250VDC, 0.01 μ F, \pm 10%)

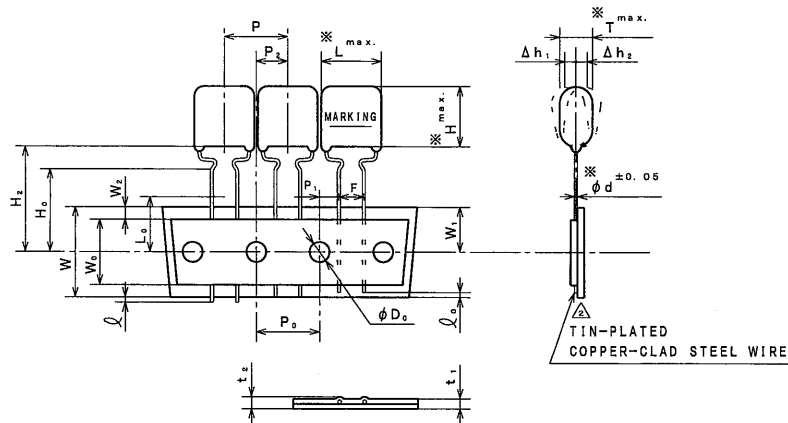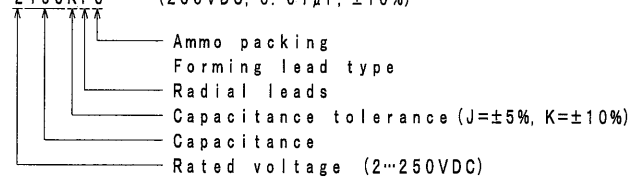

SYMBOL	ITEM	DIMENSION	REMARKS
P	Pitch of component	12.7 \pm 1.0	Tilt of component and curvature of leads shall be included.
P _e	Feed hole pitch	12.7 \pm 0.2	
P ₁	Feed hole center to lead	3.85 \pm 0.5	
P ₂	Hole center to comp. center	6.35 \pm 1.3	Tilt of component due to curvature of leads shall be included.
F	Lead-to-lead distance	5.0 \pm 0.5	
$\Delta h_{1,2}$	Component alignment	0~2.0	Tilt of component due to curvature of leads shall be included.
W	Paper backing width	18.0 \pm 0.5	
W ₀	Adhesive tape width	9.5min.	The hold down tape shall not protrude beyond the carrier tape.
W ₁	Hole position	9.0 \pm 0.5	
W ₂	Hold-down tape position	0~3.0	
H ₂	Component height	22.0 \pm 0.75	
H ₀	Lead-wire clinch height	16.0 \pm 0.5	
f	Lead-wire protrusion	0max.	
f ₀	Lead-wire depression	7.0max.	
ϕD_0	Feed hole diameter	4.0 \pm 0.2	
t ₁	Total tape thickness	0.7 \pm 0.2	Total thickness including the hold down tape.
t ₂	Total thickness	1.5max.	
L ₀	Length of snapped lead	11.0max.	

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polyester film dielectric.

The capacitor is enclosed in non-combustible epoxy resin and has two leads.

MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage and date code.

PROPERTIES

Capacitance	: See table	at 1kHz
Capacitance tolerance	: \pm 5% (J), \pm 10% (K)	at 1kHz
Rated voltage	: 250VDC Δ Δ	(Derating of rated voltage by 1.25%/°C at more than 85°C)
Withstand voltage	: 250VDC \times 150%	for 60s
Insulation resistance	: \geq 9000M Ω	at 100VDC, 20°C for 60s
Dissipation factor	: \leq 1.0%	at 1kHz, 20°C
Category temperature range	: Δ From -40°C to +105°C	(including temperature rise on unit surface)

DO NOT SCALE DRAWING REVISIONS INDICATED BY Δ ALL DIMENSIONS ARE IN MILLIMETERS

ALTERATION

ISSUE	DESCRIPTION	DATE
Δ	Modification	Jun. 20 2002
Δ	Company name changed	Oct. 1 2004
Δ	Company name changed	Apr. 1 2005
Δ	Company name changed	Apr. 1 2006
Δ	Correction: category temperature range (-40°C~+85°C \rightarrow -40°C~+105°C) Addition: rated voltage (Derating of rated voltage by 1.25%/°C at more than 85°C)	Jan. 22 2008
Δ	Company name changed Error correction	Apr. 1 2008
Δ	Company name changed	Apr. 1 2012
Δ	Company name changed	Apr. 1 2013
Δ	Company name changed	Apr. 1 2015


SPECIFICATIONS No.
TE72028Y

Reference

DESIGN	<i>M. Oshida</i>
CHECKED	<i>K. Osaki</i>
APPROVAL	<i>Y. Takata</i>
ESTABLISHMENT	Apr. 27, 1987
TYPE NAME	ECQE2*** () F3
NAME	Metallized Polyester Film Capacitor
DRAWING NAME	PRODUCT DRAWING
DRAWING No.	CT-H-C013 (1/2)


Toyama-Matsue Plant
Device Solutions Business Division
Panasonic Corporation

- Note 1. No more than 3 consecutive missing is permitted.
 Note 2. A tape conjunction and a tape discrepancy specify as follows.

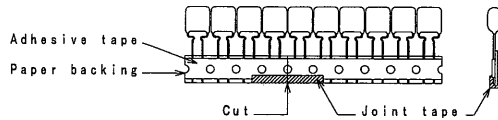


A tape sliding shall not exceed in an allowance of "P₀" dimension.
 A joint tape put on the back side of paper backing, and turn up the lower part to the front.

- Note 3. Marking on components may not be the same side.
 Note 4. The tape adhesion is more than 3.92N (400gf) / 25mm.
 Note 5. A tape trailer having at least 3 feed holes is required at the end of the tape.
 Note 6. 1) The P₁ and P₂ dimension shall be measured as shown in the figure after the adhesive tape placing upward.
 (measuring from the center of sprocket hole to the right.)
 2) The P₂ dimension shall be measured between center of a vertical projection plane for tape plane and center of sprocket hole.




- Note 7. The lead crimping shape shows as follows.



Packing specification

1. Case size
Ammo pack

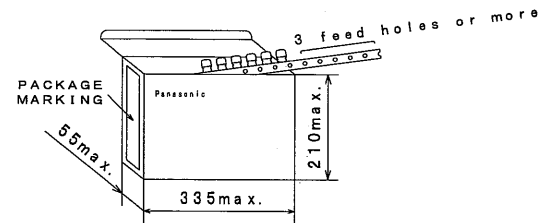

2. Packing quantity

Capacitance range	Packing quantity
0.01~0.082μF	1000
0.1~0.27μF	500

3. Handling notes

- 1) One package must be packed one product only.
- 2) The storage must be stacked 5 boxes or less (surface printed placing upward).
 (For prevention from displacement of capacitors and damage of lead crimping.)
- 3) The packing box must be handled with care and never thrown out.

Reference

TYPE NAME	ECQE2*** () F3
DRAWING No.	CT-H-C013 (2/2)

Toyama-Matsue Plant
 Device Solutions Business Division
 Panasonic Corporation


THIRD ANGLE PROJECTION

ITEM CODE	RATED VOLTAGE	CAP. (μF)	DIMENSIONS				
			$\times L$	$\times T$	$\times H$	$\times d$	$\times H_1$
ECQE2334 () F3	250VDC	0.33	12.0	6.5	12.0	0.6	33.5

TOL. SYMBOL (J or K)


ITEM CODE NUMBER STRUCTURE

ECQE 2334KF3 (250VDC, 0.33 μF , $\pm 10\%$)

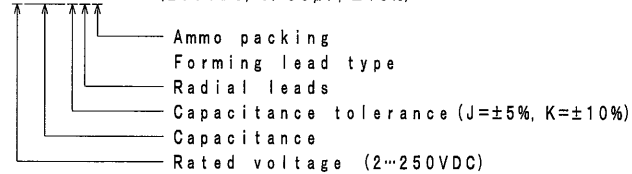

ALTERATION		
ISSUE	DESCRIPTION	DATE
\triangle	Modification	Jun. 20 2002
\triangle	Company name changed	Oct. 1 2004
\triangle	Company name changed	Apr. 1 2005
\triangle	Company name changed	Apr. 1 2006
\triangle	Correction: category temperature range (-40°C~+85°C→-40°C~+105°C) Addition: rated voltage (Derating of rated voltage by 1.25%/°C at more than 85°C)	Jan. 22 2008
\triangle	Company name changed Error correction	Apr. 1 2008
\triangle	Company name changed	Apr. 1 2012
\triangle	Company name changed	Apr. 1 2013
\triangle	Company name changed	Apr. 1 2015

SPECIFICATIONS No.
TE8Y160H

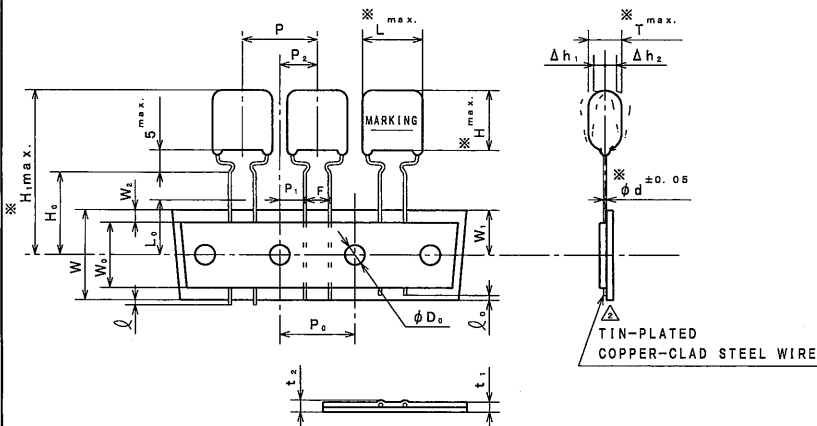

SYMBOL	ITEM	DIMENSION	REMARKS
P	Pitch of component	15.0 \pm 1.0	Tilt of component and curvature of leads shall be included.
P ₀	Feed hole pitch	15.0 \pm 0.2	
P ₁	Feed hole center to lead	5.0 \pm 0.5	
P ₂	Hole center to comp. center	7.5 \pm 1.3	Tilt of component due to curvature of leads shall be included.
F	Lead-to-lead distance	5.0 \pm 0.2	
$\Delta h_{1,2}$	Component alignment	0~2.0	Tilt of component due to curvature of leads shall be included.
W	Paper backing width	18.0 \pm 0.5	
W ₀	Adhesive tape width	9.5min.	The hold down tape shall not protrude beyond the carrier tape.
W ₁	Hole position	9.0 \pm 0.5	
W ₂	Hold-down tape position	0~3.0	
H ₀	Lead-wire clinch height	16.0 \pm 0.5	
↑	Lead-wire protrusion	0max.	
↓	Lead-wire depression	7.0max.	
φD ₀	Feed hole diameter	4.0 \pm 0.2	
t ₁	Total tape thickness	0.7 \pm 0.2	Total thickness including the hold down tape.
t ₂	Total thickness	1.5max.	
L ₀	Length of snapped lead	11.0max.	

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polyester film dielectric.
The capacitor is enclosed in non-combustible epoxy resin and has two leads.


MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage and date code.

PROPERTIES

Capacitance : See table at 1kHz
 Capacitance tolerance : $\pm 5\%$ (J), $\pm 10\%$ (K) at 1kHz
 Rated voltage : 250VDC \triangle/\triangle (Derating of rated voltage by 1.25%/°C at more than 85°C)
 Withstand voltage : 250VDC \times 150% for 60s
 Insulation resistance : $\geq 9000\Omega$ at 100VDC, 20°C for 60s
 Dissipation factor : $\leq 1.0\%$ at 1kHz, 20°C
 Category temperature range : \triangle From -40°C to +105°C
 (including temperature rise on unit surface)

MARKING EXAMPLE




Reference

DESIGN	<i>A. Mochida</i>
CHECKED	<i>K. Osaki</i>
APPROVAL	<i>Y. Takata</i>
ESTABLISHMENT	Jan. 5. 1994
TYPE NAME	ECQE2334 () F3
NAME	Metallized Polyester Film Capacitor
DRAWING NAME	PRODUCT DRAWING
DRAWING No.	CT-H-3B4E (1/2)

Toyama-Matsue Plant
Device Solutions Business Division
Panasonic Corporation

- Note 1. No more than 3 consecutive missing is permitted.
 Note 2. A tape conjunction and a tape discrepancy specify as follows.

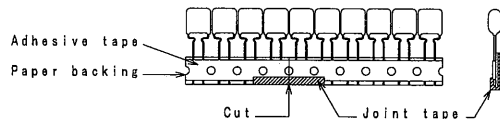


A tape sliding shall not exceed in an allowance of "P₀" dimension.
 A joint tape put on the back side of paper backing, and turn up the lower part to the front.

- Note 3. Marking on components may not be the same side.
 Note 4. The tape adhesion is more than 3.92N (400gf)/25mm.
 Note 5. A tape trailer having at least 3 feed holes is required at the end of the tape.

Packing specification

1. Case size
Ammo pack

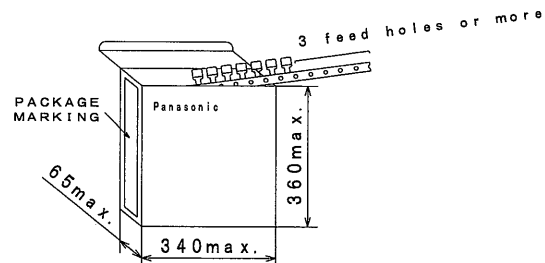

2. Packing quantity

Capacitance range	Packing quantity
0.33μF	1000

3. Handling notes

- 1) One package must be packed one product only.
- 2) The storage must be stacked 5 boxes or less (surface printed placing upward).
 (For prevention from displacement of capacitors and damage of lead crimping.)
- 3) The packing box must be handled with care and never thrown out.

Reference

TYPE NAME	ECQE2334 () F3
DRAWING No.	CT-H-3B4E (2/2)



Toyama·Matsue Plant
 Device Solutions Business Division
 Panasonic Corporation

THIRD ANGLE PROJECTION

ITEM CODE	RATED VOLTAGE	CAP. (μ F)	DIMENSIONS				
			* L	* T	* H	* d	* H ₁
ECQE2394 () F3	250VDC	0.39	18.5	4.9	12.0	0.6	33.5
" 2474 () F3	"	0.47	"	5.3	12.5	"	34.0
" 2564 () F3	"	0.56	"	5.5	13.0	"	34.5
" 2684 () F3	"	0.68	"	6.0	13.5	0.8	35.0
" 2824 () F3	"	0.82	"	6.5	14.5	"	36.0
" 2105 () F3	"	1.0	"	7.4	15.0	"	36.5
" 2125 () F3	"	1.2	"	8.0	15.9	"	37.4
" 2155 () F3	"	1.5	"	9.0	16.8	"	38.3

ITEM CODE NUMBER STRUCTURE

ECQE 2394KF3 (250VDC, 0.39 μ F, \pm 10%)

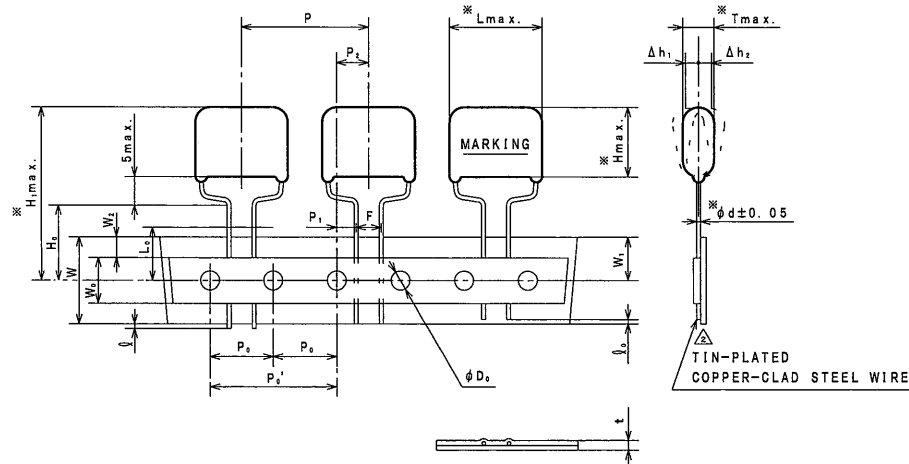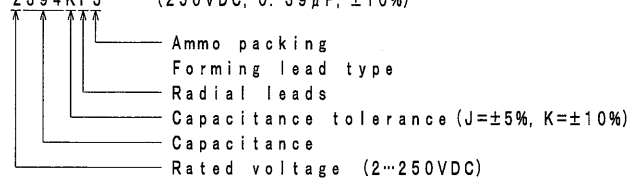

SYMBOL	ITEM	DIMENSION	REMARKS
P	Pitch of component	25.4 \pm 1.0	Tilt of component and curvature of leads shall be included.
P ₂	Feed hole pitch	12.7 \pm 0.2	
P ₀ '	"	25.4 \pm 0.2	
P ₁	Feed hole center to lead	3.85 \pm 0.5	
P ₂	Hole center to comp. center	6.35 \pm 1.3	Tilt of component due to curvature of leads shall be included.
F	Lead-to-lead distance	5.0 \pm 0.2	
Δ h _{1,2}	Component alignment	0 \sim 2.0	Tilt of component due to curvature of leads shall be included.
W	Paper backing width	18.0 \pm 0.5	
W ₀	Adhesive tape width	12.5min.	The hold down tape shall not protrude beyond the carrier tape.
W ₁	Hole position	9.0 \pm 0.5	
W ₂	Hold-down tape position	0 \sim 3.0	
H ₂	Lead-wire clinch height	18.0 \pm 0.5	
f	Lead-wire protrusion	0max.	
f ₀	Lead-wire depression	7.0max.	
ϕ D ₀	Feed hole diameter	4.0 \pm 0.2	
t	Total tape thickness	0.7 \pm 0.2	Total thickness including the hold down tape.
L ₀	Length of snapped lead	11.0max.	

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polyester film dielectric.

The capacitor is enclosed in non-combustible epoxy resin and has two leads.


MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage, manufacturer's trademark and date code.

PROPERTIES

Capacitance : See table at 1kHz
 Capacitance tolerance : \pm 5% (J), \pm 10% (K) at 1kHz
 Rated voltage : 250VDC Δ (Derating of rated voltage by 1.25%/°C at more than 85°C)
 Withstand voltage : 250VDC \times 150% for 60s
 Insulation resistance : \geq 3000M Ω · μ F at 100VDC, 20°C for 60s
 Dissipation factor : \leq 1.0% at 1kHz, 20°C
 Category temperature range : Δ From -40°C to +105°C (including temperature rise on unit surface)

MARKING EXAMPLE



ALTERATION		
ISSUE	DESCRIPTION	DATE
Δ	Company name changed	Oct. 1 2004
Δ	Company name changed	Apr. 1 2005
Δ	Company name changed	Apr. 1 2006
Δ	Correction: category temperature range (-40°C \sim +85°C \rightarrow -40°C \sim +105°C) Addition: rated voltage (Derating of rated voltage by 1.25%/°C at more than 85°C)	Jan. 22 2008
Δ	Company name changed Error correction	Apr. 1 2008
Δ	Company name changed	Apr. 1 2012
Δ	Company name changed	Apr. 1 2013
Δ	Company name changed	Apr. 1 2015

SPECIFICATIONS No.
TE88119H


Reference

DESIGN	<i>M. M. Bando</i>
CHECKED	<i>K. Osaki</i>
APPROVAL	<i>T. Takata</i>
ESTABLISHMENT	Jan. 5, 1994
TYPE NAME	ECQE2*** () F3
NAME	Metallized Polyester Film Capacitor
DRAWING NAME	PRODUCT DRAWING
DRAWING No.	CT-H-3B6E (1/2)

Toyama-Matsue Plant
Device Solutions Business Division
Panasonic Corporation

THIRD ANGLE PROJECTION

- Note 1. No more than 2 consecutive missing is permitted.
 Note 2. A tape conjunction and a tape discrepancy specify as follows.

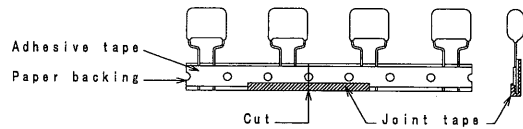


A tape sliding shall not exceed in an allowance of "P," dimension.
 A joint tape put on the back side of paper backing, and turn up the lower part to the front.

- Note 3. Marking on components may not be the same side.
 Note 4. The tape adhesion is more than 3.92N (400gf) / 25mm.
 Note 5. A tape trailer having at least 3 feed holes is required at the end of the tape.

Packing specification

1. Case size
Ammo pack

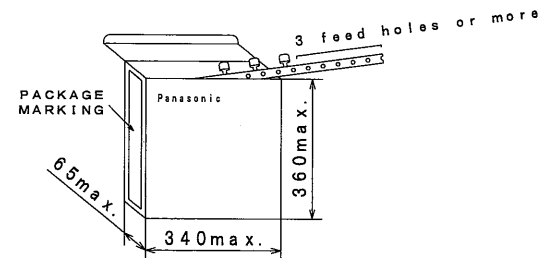

2. Packing quantity

Capacitance range	Packing quantity
0.39~1.2μF	500
1.5μF	400

3. Handling notes

- 1) One package must be packed one product only.
- 2) The storage must be stacked 5 boxes or less (surface printed placing upward).
 (For prevention from displacement of capacitors and damage of lead crimping.)
- 3) The packing box must be handled with care and never thrown out.

Reference

TYPE NAME	ECQE2*** () F3
DRAWING No.	CT-H-3B6E (2/2)

Toyama·Matsue Plant
 Device Solutions Business Division
 Panasonic Corporation

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Film Capacitors](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[F339X134748MIP2T0](#) [F450KG153J250ALH0J](#) [750-1018](#) [FKP1-1500160010P15](#) [FKP1R031007D00JYSD](#) [FKP1R031507E00JYSD](#)
[FKP1U024707E00KYSD](#) [82DC4100CK60J](#) [82EC1100DQ50K](#) [PFR5101J100J11L16.5TA18](#) [PME261JB5220KR19T0](#) [A451GK223M040A](#)
[A561ED221M450A](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [R49AN347000A1K](#) [EEC2G505HQA406](#) [B25668A6676A375](#) [B25673A4282E140](#)
[BFC233868148](#) [BFC2370GC222](#) [C3B2AD44400B20K](#) [C4ASWBU3220A3EK](#) [CB027C0473J--](#) [CB177I0184J--](#) [CB182K0184J--](#) [23PW210](#)
[950CQW5H-F](#) [SBDC3470AA10J](#) [SCD105K122A3-22](#) [2N3155](#) [A571EH331M450A](#) [FKP1-2202KV5P15](#) [FKS3-680040010P10](#)
[QXL2E473KTPT](#) [445450-1](#) [B25669A3996J375](#) [46KI322000M1M](#) [46KR415050M1K](#) [4BSNBX4100ZBFJ](#) [MKP383510063JKP2T0](#)
[MKPY2-.02230020P15](#) [MKT 1813-368-015](#) [4055292001](#) [46KN410000N1K](#) [EEC2E106HQA405](#) [EEC2G205HQA402](#) [EEC2G805HQA415](#)
[P409CP224M250AH470](#) [82EC2150DQ50K](#)