

SMD Glass Sealing Crystals 8.0 x 4.5 x 1.5 mm AX Series

Features

- Reliable glass sealed ceramic package.
- Wide operating temperature range.
- Superior and reliable performance in harsh environment.
- Application : TPMS, ECM, ABS and sensor modules.
- Contains Pb in sealing glass exempted by RoHS directive.


Electrical Specifications

Item / Type	AX
Frequency Range	8 ~ 40 MHz
Overtone	Fundamental
Frequency Tolerance (at 25 °C)	± 30 ppm
Frequency Stability	± 50 ppm Max. (- 40 ~ + 85 °C)
Operating Temperature Range	- 40 ~ +150 °C
Drive Level	10 μW (typical) ; 500 μW (Max.)
Load Capacitance	8 pF, or specify
Storage Temperature Range	- 40 ~ +150 °C
Reliability Standard	AEC-Q200

Equivalent Series Resistance(ESR)

Fundamental	
8 ~ 10 MHz	120 Ω Max.
10 ~ 12 MHz	100 Ω Max.
12 ~ 40 MHz	80 Ω Max.

Dimensions

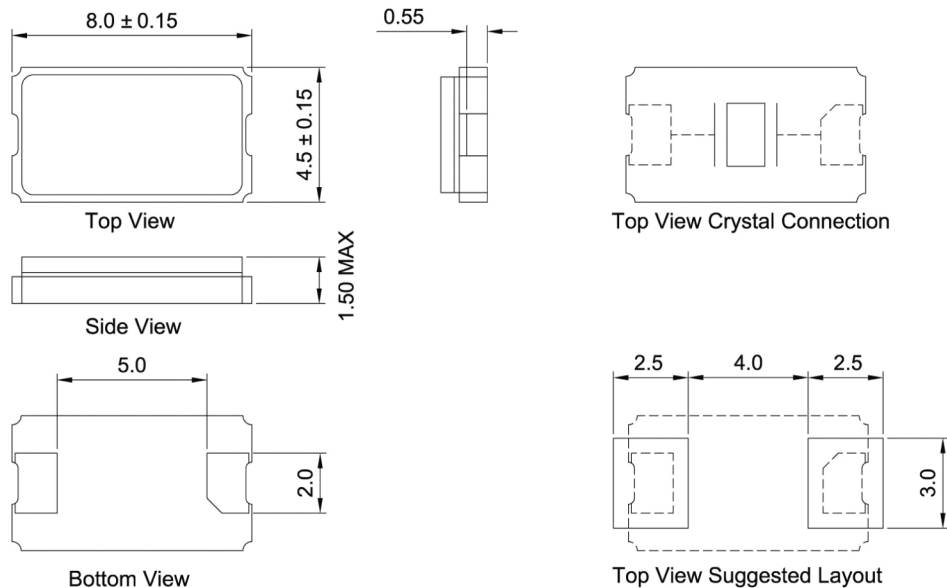

Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals category](#):

Click to view products by [TXC Corporation manufacturer](#):

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFX TAL066198Cutt](#)
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)
[LFX TAL065253Cutt](#) [LFX TAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)