


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD		
	W2	REVISED PER ECO-11-005140		30MAR11	RK	HMR		

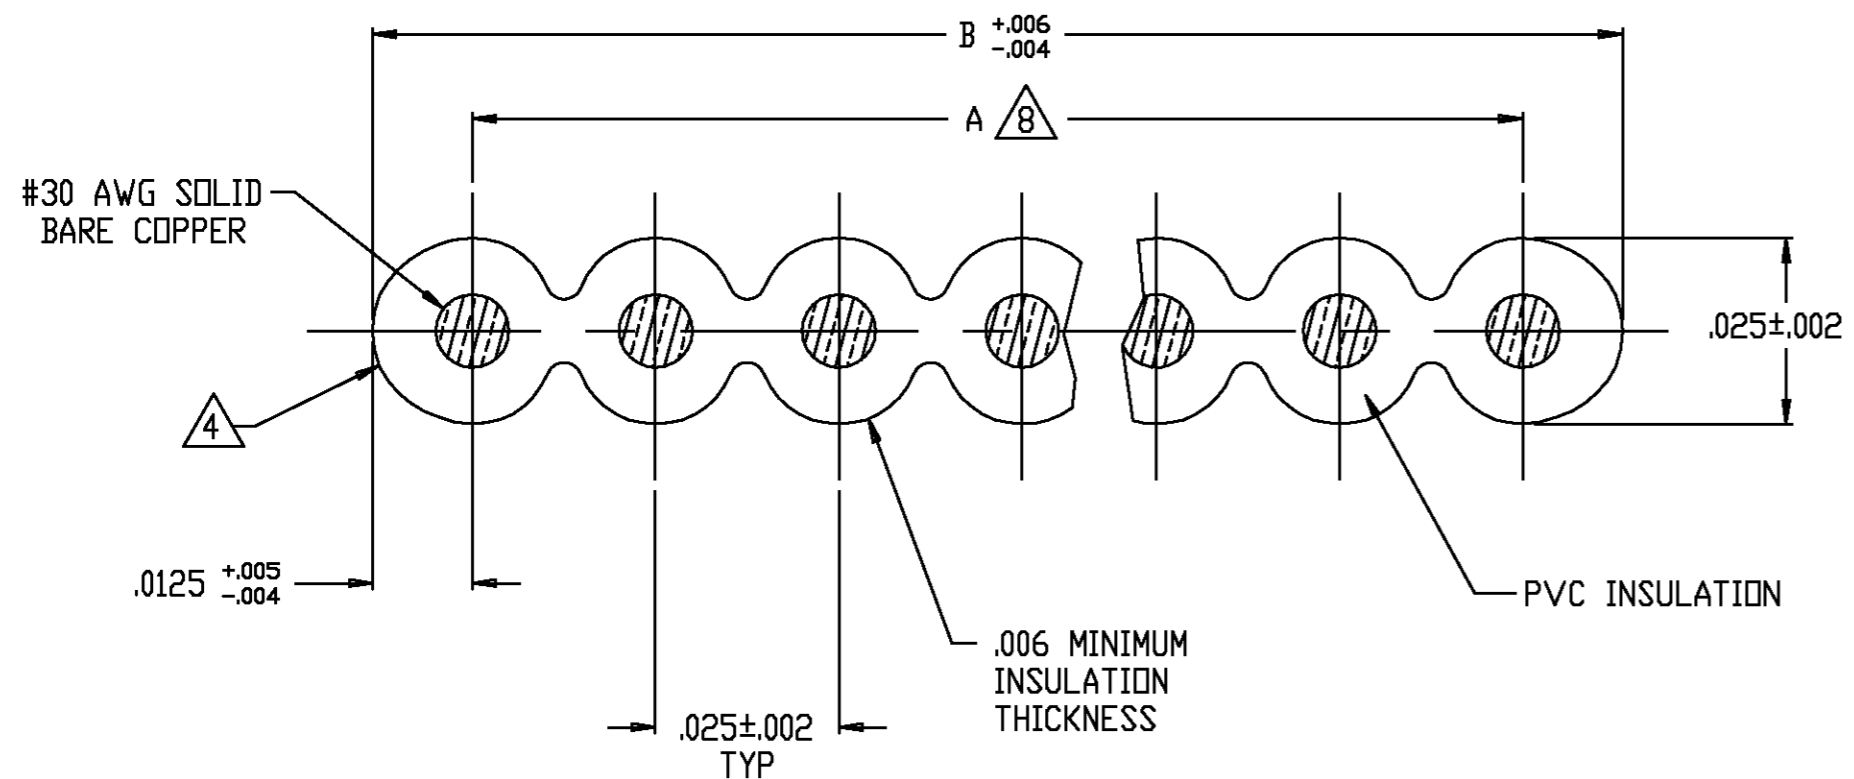

- CABLE CERTIFIED TO:
-UL CABLE STYLE: 2678
- CABLE PHYSICAL SPECIFICATIONS:
 - TEMPERATURE RATING: -20°C TO +105°C
 - FLAMMABILITY:
-UL: VW1
 - INSULATION: GRAY FLAME RETARDANT FLEXIBLE PVC
 - CONDUCTORS: #30 AWG SOLID BARE COPPER
- ELECTRICAL REQUIREMENTS:
 - VOLTAGE: 150 VOLTS
 - IMPEDANCE: 80 OHMS
 - CAPACITANCE: 19.2 pF/FT AT 1MHZ
 - PROPAGATION DELAY: 1.55 ns/FT
 - INSULATION RESISTANCE: 10^{10} OHMS/10 FT
 - CROSSTALK: 10 FT SAMPLE 5 ns RISE TIME (GND, SIG, GND)
NEAR END: 4.0%
FAR END: 6.0%

- 4 RED EDGE MARK ON CONDUCTOR #1
- 5 LENGTH PER REEL: 100 FT, REEL MAY CONTAIN SEPARATE LENGTHS
20 FT MIN PER LENGTH
- 6 LENGTH PER REEL: 500 FT, CONTINUOUS.
- 7. CABLE SURFACE PRINTED PER UL AND CSA REQUIREMENTS.
- 8 DIMENSION A TOLERANCES
0-68 POSN $+0.005/-0.003$
69-100 POSN $+ .007/- .003$
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REEL LENGTH	DIMENSION A	DIMENSION B	NO. OF COND.	PART NUMBER
6	.375	.400	16	5-57013-2
5	.375	.400	16	5- -1
6	.825	.850	34	5- -0
5	.825	.850	34	4- -9
6	.675	.700	28	4- -7
5	.675	.700	28	4- -6
6	.625	.650	26	2- -6
5	.625	.650	26	2- -5
OBSOLETE	2.475	2.500	100	2- -4
9	1.975	2.000	80	2- -3
OBSOLETE	1.775	1.800	72	2- -2
	1.675	1.700	68	2- -1
	1.475	1.500	60	2- -0
9	1.225	1.250	50	1- -9
OBSOLETE	1.075	1.100	44	1- -8
9	.975	1.000	40	1- -7
OBSOLETE	.875	.900	36	1- -6
	.725	.750	30	1- -5
	.575	.600	24	1- -4
	.475	.500	20	1- -3
	1.775	1.800	72	1- -2
	1.675	1.700	68	1- -1
	1.225	1.250	50	1- -0
9	1.075	1.100	44	-9
	.575	.600	24	-8
9	.875	.900	36	-7
	.725	.750	30	-6
OBSOLETE	2.475	2.500	100	-5
	1.975	2.000	80	-4
	1.475	1.500	60	-3
	.975	1.000	40	-2
	.475	.500	20	57013-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±.1 2 PLC ±.02 3 PLC ±.005 4 PLC ±.0005 ANGLES ± FINISH	DWN: KOPPENHEFFER 03APR92 CHK: W. HARRIS 22APR92 APVD: S. QURESHI 03APR92	NAME: CA, FLAT RIBBON, .025 CL., #30 AWG, SOLID, PVC INSUL
MATERIAL	WEIGHT	SIZE: A2	CAGE CODE: 00779
CUSTOMER DRAWING		DRAWING NO: 57013	RESTRICTED TO
SCALE: NTS		SHEET: 1 OF 1	REV: W2

STE TE Connectivity

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Flat Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[8132/08100](#) [FST-23A-15](#) [1301210030](#) [C336514-500](#) [902220736002000](#) [902220736006000](#) [28100-0614](#) [281000616](#) [281000625](#) [9L28014-008-H300](#) [28100-0571](#) [28100-0602](#) [281000624](#) [28100-0650](#) [28100-0664](#) [336512-300](#) [336518](#) [336537-CUT-LENGTH](#) [3447/10-100](#) [3625/08-30M](#) [362514100MSF](#) [40WDY00005](#) [5111993623](#) [336506-300](#) [336508-300](#) [C374910](#) [34WDY00006](#) [3749/10-100](#) [375630](#) [3-971111-6](#) [1-1437356-3](#) [57034-6](#) [812504](#) [8132/11100](#) [5-1437214-8](#) [1301210060](#) [1301210058](#) [1301190003](#) [1301210032](#) [5111196336](#) [607.5689.087](#) [607.5689.091](#) [3801/04](#) [1301210020](#) [3754/12](#) [902220736003000](#) [3625/22100MSF](#) [902220736005000](#) [902220736004000](#) [C3811/10-100](#)