


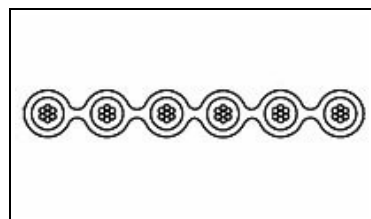

## 57040-3 Product Details

[Share](#) [Print](#) [Email](#)

**57040-3**

TE Internal Number: 57040-3

Active

### Flat Ribbon Cable

Always EU RoHS/ELV Compliant (Statement of Compliance)

**Product Highlights:**

- 1.27 mm Centerline
- Wire Size - Details = 28 AWG (7/36) Stranded
- Number of Conductors = 26
- Ribbon Cable Outside Conductor Spacing = 31.75 mm
- Width = 33.00 mm

[View all Features](#)
**Quick Links**

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

### Documentation & Additional Information

**Product Drawings:**

- [CABLE, PLANAR RIBBON, #28 AWG 7/36 STRANDED](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- [MTA, CST-100 II, SL-156 and AMP Economy Power \(EP\) C...](#) (PDF, English)

**Product Specifications:**

- [Multi-Conductor 28 AWG 0.050 Center Flat Cable](#) (PDF, English)

**Application Specifications:**

- None Available

**Instruction Sheets:**

- None Available

**CAD Files:**

- None Available

**Additional Information:**

- [Product Line Information](#)

**Related Products:**

- [Tooling](#)

[List all Documents](#)

Feedback

### Product Features (Please use the Product Drawing for all design activity)

**Product Type Features:**

- [Ribbon Cable Outside Conductor Spacing](#) (mm [in]) = 31.75 [1.250]
- Color = Gray

**Electrical Characteristics:**

- Voltage Rating (VAC) = 300
- Impedance ( $\Omega$ ) = 105
- Capacitance (pF/ft) = 13.7

**Dimensions:**

- Width (mm [in]) = 33.00 [1.300]
- Height (mm [in]) = 0.89 [0.035]

**Body Features:**

- [Insulation Material](#) = PVC

**Housing Features:**

- Centerline (mm [in]) = 1.27 [0.050]

**Configuration Features:**

- Number of Conductors = 26

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

**Conditions for Usage:**

- [Wire Size - Details](#) = 28 AWG (7/36) Stranded
- Temperature Range ( $^{\circ}\text{C}$ ) = -20 - +105

**Packaging Features:**

- Packaging Quantity = 30 Meters per Reel

**Other:**

- Brand = AMP
- Series = AMP 57040

### Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)

### Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

### Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

### Keep Me Informed





## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Flat Cables](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[8132/08100](#) [FST-23A-15](#) [1301210030](#) [C336514-500](#) [902220736002000](#) [902220736006000](#) [28100-0614](#) [281000616](#) [281000625](#) [9L28014-008-H300](#) [28100-0571](#) [28100-0602](#) [281000624](#) [28100-0650](#) [28100-0664](#) [336512-300](#) [336518](#) [336537-CUT-LENGTH](#) [3447/10-100](#) [3625/08-30M](#) [362514100MSF](#) [40WDY00005](#) [5111993623](#) [336506-300](#) [336508-300](#) [C374910](#) [34WDY00006](#) [3749/10-100](#) [375630](#) [3-971111-6](#) [1-1437356-3](#) [57034-6](#) [812504](#) [8132/11100](#) [5-1437214-8](#) [1301210060](#) [1301210058](#) [1301190003](#) [1301210032](#) [5111196336](#) [607.5689.087](#) [607.5689.091](#) [3801/04](#) [1301210020](#) [3754/12](#) [902220736003000](#) [3625/22100MSF](#) [902220736005000](#) [902220736004000](#) [C3811/10-100](#)