



SCHEMATIC



P.C.B. LAYOUT

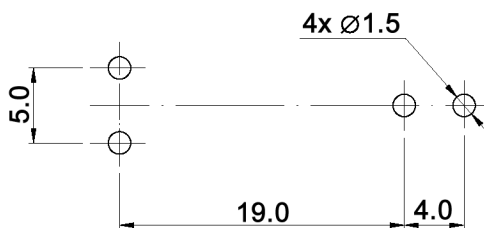

Tolerances: 0.00: $\pm 0.25\text{mm}$ 0.0: $\pm 0.40\text{mm}$	Date	Name
	05/09	dr

**MSP 101 A-RA**

**knitter-switch**

**30 18 32**

Page

1/2

Modifications	Date	Name
---------------	------	------

**Specifications:**

Contact rating: 1A, 120 AC or 28V DC  
 Contact resistance: 30mOhm max.  
 Insulation resistance: 100MOhm min. at 500V DC  
 Operating temperature: -20°C to +70°C  
 Mechanical life: 10 000 cycles  
 Operating force: 650 +/-150gf max.  
 Included accessories: 1 pc. tooth washer  
 1 pc. nut  
 Material: Case: brass, nickel plated  
 Actuator: PA66  
 Base: POM  
 Contacts: phosphor bronze, silver plated over nickel  
 Terminals: brass, silver plated over nickel



Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm		Date	Name	<h1>MSP 101 A-RA</h1>
		05/09	dr	
			<b>knitter-switch</b>	<h2>30 18 32</h2>
Modifications		Date	Name	Page 2/2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pushbutton Switches](#) category:*

*Click to view products by [Knitter-Switch](#) manufacturer:*

Other Similar products are found below :

[LW1L-M1C10V-A](#) [LW2L-A1C20M-GD](#) [LW2L-M1C20M-A](#) [60324L](#) [M7E-HRN2](#) [67021K512](#) [67081K512X](#) [701PB580](#) [719-5504-000](#)  
[MDPSSGLFS](#) [810KSV30B](#) [MML21KA3ABK](#) [MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8646AB6X718UL](#) [8646ABUL](#)  
[FSDWH](#) [9001KXRK](#) [9001T8BK](#) [9533CD4+U574+U4922](#) [1203MRA](#) [A22EM01S](#) [A595](#) [1202A6](#) [12037A2ULCSA](#) [1203A2UL](#) [ABD122N-](#)  
[B](#) [1211390004](#) [ABN111-Y](#) [ABN400-R](#) [1211500044](#) [1211580012](#) [1212MRA](#) [1232A6NF](#) [RA3CSH6A](#) [1241.1183.7047](#) [1241.2511](#)  
[1241.3428](#) [1223A2ULCSA](#) [1223MRA](#) [1232AX2119](#) [1241.1183.8000](#) [1241.1183.8029](#) [1241.2506](#) [1241.2606](#) [12MA6](#) [1301940184](#)  
[RELBARF6X10\(PLASTIC\)](#) [13435AG](#)