


05 Series

Slide Switches

HOW TO ORDER SEE PAGE 1

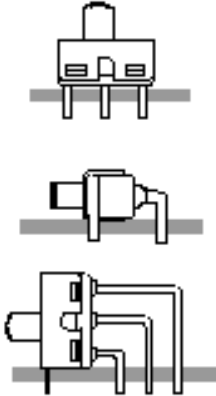

SPECIFICATIONS:

- Contact rating: see page 1 or 38
- Contact resistance: 10mΩ max. initial @ 2-4VDC, 100mA for both coin silver and gold plated contacts
- Electrical life: 30.000 actuations at full load
- Insulation resistance: 1.000MΩ min.
- Dielectric strengths: 1.500V RMS @ sea level
- Operation temperature: -30 °C to 85 °C


MATERIALS:

- Slide handel: nylon (UL 94V-0)
- Housing: stainless steel
- Case: diallyl phthalate (DAP) (UL 94V-0)
- Terminal seal: epoxy
- Switch support: brass, tin plated
- Contact materials: see page 1 or 38

SPDT TYPE 1105S1M1RE2




FUNCTION	SWITCH POSITION		
1	ON	NONE	ON
5	ON	NONE	(ON)
2	ON	OFF	ON
TERM. CONN.	2-1	OPEN	2-3

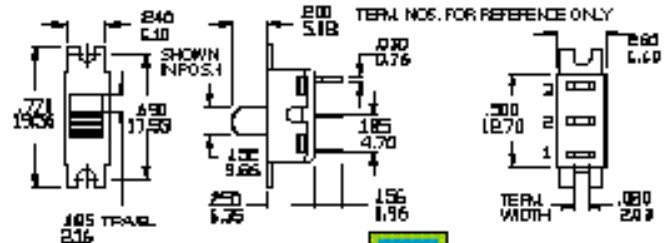

DPDT TYPE 2105S1M1QE2




FUNCTION	SWITCH POSITION		
1	ON	NONE	ON
2	ON	OFF	ON
TERM. CONN.	2-1 5-4	OPEN	2-3 5-6

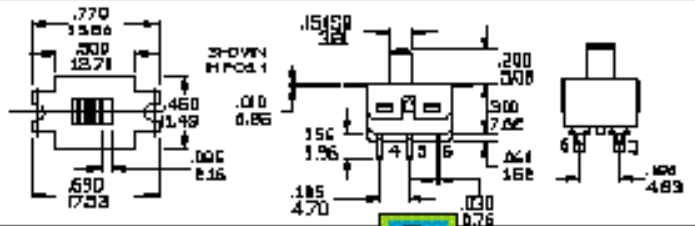

SPDT TYPE 1105S1M6RE2



TERMINATION OPTIONS

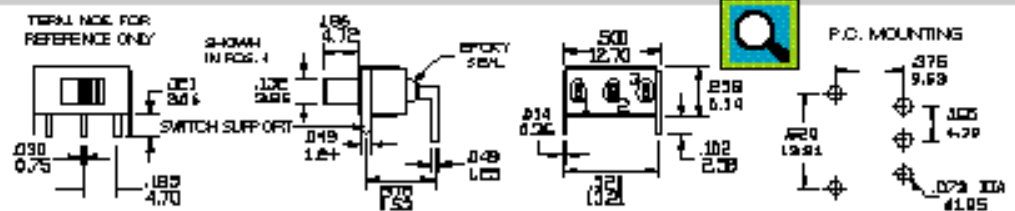

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Slide Switches](#) category:

Click to view products by [IC Switches](#) manufacturer:

Other Similar products are found below :

[6-1437581-1](#) [M43R](#) [MHS123K15D](#) [MHSS1104A](#) [MMD](#) [GH49S010001](#) [GH49WW00001](#) [1437576-8](#) [EPS1PC1](#) [1825074-1](#) [1825160-3](#)
[1825167-2](#) [25139NLDB](#) [25436NLDB](#) [25449NAH](#) [25536NA](#) [L101011ML04B](#) [SLB1240R45](#) [SLSA12004](#) [1825078-1](#) [1825080-4](#) [1825081-1](#)
[1825269-1](#) [1825270-2](#) [STS141RA04](#) [T2215BEN506](#) [GF-124-0204](#) [GH46P000001](#) [GH46W000001](#) [GH49P010001](#) [25339NA](#) [25436NLDH](#)
[CST91246FK](#) [TG36P000000](#) [TG36P000050](#) [47227LFE](#) [49331L](#) [MHSS1105A](#) [50208L](#) [HW4S-5LF22N3](#) [L202091MS02Q](#) [4-1437581-7](#)
[X2225CR-437W](#) [48BFSP3M2QT](#) [49329L](#) [1101M1S3ZB8E2](#) [1-1437581-1](#) [EG1218REDACTUATOR](#) [TG39W000000](#) [1825075-1](#)