




(2,54 mm) .100"

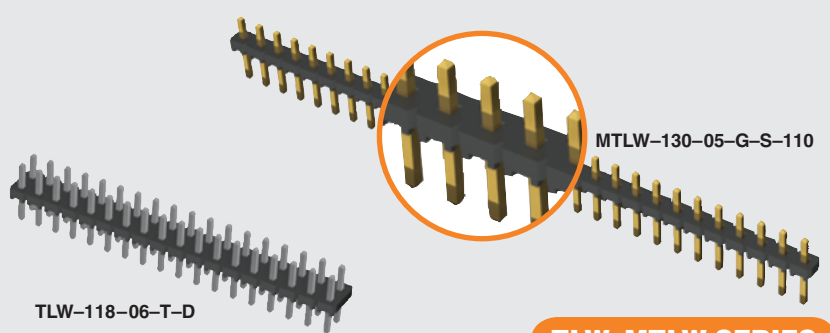


TLW, MTLW SERIES

LOW PROFILE .025" SQ POST HEADERS

Mates with:
BSW, CES, SLW, HLE,
SMSD, SMSS

FEATURES

These headers provide the ultimate low profile (0,64 mm) .025" square post board stacking system. The high quality Phosphor Bronze terminals are available with a standard short post height (TLW Series) for mating with low profile sockets, or the post height can be Modified (MTLW Series) to accommodate IDC assemblies and other applications.



TLW — **1** NO. PINS PER ROW

01 thru 40
= Single Row

01 thru 36
= Double Row

LEAD STYLE

Specify LEAD STYLE from chart

LEAD STYLE	A	C
-01	N/A	(5,84) .230
-05	(4,32) .170	(2,67) .105
-06	(3,43) .135	(2,67) .105

PLATING OPTION

-F
= Gold flash on post, Matte Tin on tail

-G
= 10µ" (0,25 µm) Gold on post, Gold flash on tail

-T
= Matte Tin

ROW OPTION

-S
= Single Row

-D
= Double Row

OTHER OPTION

-RA
= Right Angle
(-01 Lead Style only)

-“XX”
= Polarized Position
Specify position for omitted pin.

ALSO AVAILABLE
(MOQ Required)

- Other platings
- Contact Samtec.

SPECIFICATIONS

For complete specifications see www.samtec.com?TLW or www.samtec.com?MTLW

Insulator Material: Black Liquid Crystal Polymer
Terminal Material: Phosphor Bronze
Plating: Au or Sn over 50µ" (1,27 µm) Ni
Current Rating (TLW/SLW): 5.2 A per pin (1 pin powered per row)
Operating Temp Range: -55°C to +105°C with Tin, -55°C to +125°C with Gold
RoHS Compliant: Yes
Lead-Free Solderable: Yes

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality

Note: Some lengths, styles and options are non-standard, non-returnable. MTLW Series is non-standard, non-returnable.

MTLW — **1** NO. PINS PER ROW

01 thru 40
= Single Row

01 thru 36
= Double Row

LEAD STYLE

Specify LEAD STYLE from chart

LEAD STYLE	OAL
-05	(8,51) .335
-06	(7,62) .300
-07	(10,92) .430
-08	(13,46) .530
-09	(18,54) .730
-10	(21,08) .830
-22	(16,00) .630
-23	(11,30) .445
-24	(12,19) .480

PLATING OPTION

-F
= Gold flash on post, Matte Tin on tail

-L
= 10µ" (0,25 µm) Gold on post, Matte Tin on tail

-G
= 10µ" (0,25 µm) Gold on post, Gold flash on tail

-T
= Matte Tin


ROW OPTION

-S
= Single Row

-D
= Double Row

POST HEIGHT

-“XXX”
= Post Height Dimension (In inches)

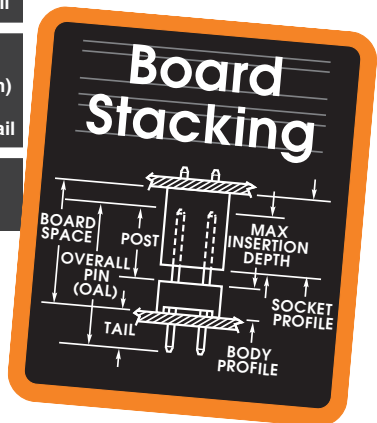

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)