
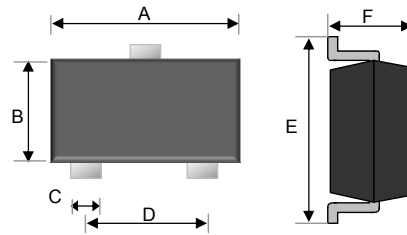


Small Signal Transistor

SOT-23

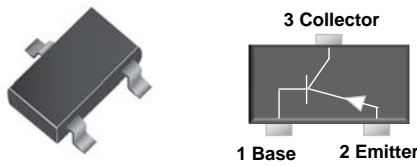

Features

- ✧ Epitaxial planar die construction
- ✧ Surface device type mounting
- ✧ Moisture sensitivity level 1
- ✧ Matte Tin(Sn) lead finish with Nickel(Ni) underplate
- ✧ Pb free version and RoHS compliant
- ✧ Green compound (Halogen free) with suffix "G" on packing code and prefix "G" on date code

Mechanical Data


- ✧ Case : SOT- 23 small outline plastic package
- ✧ Terminal: Matte tin plated, lead free., solderable per MIL-STD-202, Method 208 guaranteed
- ✧ High temperature soldering guaranteed: 260°C/10s
- ✧ Weight : 0.008gram (approximately)

Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	2.80	3.00	0.110	0.118
B	1.20	1.40	0.047	0.055
C	0.30	0.50	0.012	0.020
D	1.80	2.00	0.071	0.079
E	2.25	2.55	0.089	0.100
F	0.90	1.20	0.035	0.043

Ordering Information

Package	Part No.	Packing	Marking
SOT-23	BC856A RF	3K / 7" Reel	3A
SOT-23	BC856B RF	3K / 7" Reel	3B
SOT-23	BC857A RF	3K / 7" Reel	3E
SOT-23	BC857B RF	3K / 7" Reel	3F
SOT-23	BC857C RF	3K / 7" Reel	3G
SOT-23	BC858A RF	3K / 7" Reel	3J
SOT-23	BC858B RF	3K / 7" Reel	3K
SOT-23	BC858C RF	3K / 7" Reel	3L
SOT-23	BC856A RFG	3K / 7" Reel	3A
SOT-23	BC856B RFG	3K / 7" Reel	3B
SOT-23	BC857A RFG	3K / 7" Reel	3E
SOT-23	BC857B RFG	3K / 7" Reel	3F
SOT-23	BC857C RFG	3K / 7" Reel	3G
SOT-23	BC858A RFG	3K / 7" Reel	3J
SOT-23	BC858B RFG	3K / 7" Reel	3K
SOT-23	BC858C RFG	3K / 7" Reel	3L

Suggested PAD Layout

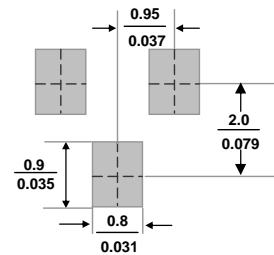

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.


Maximum Ratings

Type Number	Symbol	Value	Units
Power Dissipation	P_D	250	mW
Collector-Base Voltage	V_{CBO}	BC856	-80
		BC857	-50
		BC858	-30
Collector-Emitter Voltage	V_{CEO}	BC856	-65
		BC857	-45
		BC858	-30
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-0.1	A
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to + 150	°C


Notes:1. Valid provided that electrodes are kept at ambient temperature

Small Signal Transistor
Electrical Characteristics

Type Number	Symbol	Min	Max	Units		
Collector-Base Breakdown Voltage	BC856 BC857 BC858	$I_C = -10\mu A$ $I_E = 0$	$V_{(BR)CBO}$	-80 -50 -30	-	V
Collector-Emitter Breakdown Voltage	BC856 BC857 BC858	$I_C = -10mA$ $I_B = 0$	$V_{(BR)CEO}$	-65 -45 -30	-	V
Emitter-Base Breakdown Voltage		$I_E = -1\mu A$ $I_C = 0$	$V_{(BR)EBO}$	-5	-	V
Collector Cut-off Current		$V_{CB} = -30V$ $I_E = 0$	I_{CBO}	-	-15	nA
Emitter Cut-off Current		$V_{EB} = -5V$ $I_C = 0$	I_{EBO}	-	-0.1	μA
DC current gain	BC856A, BC857A, BC858A BC856B, BC857B, BC858B BC857C, BC858C	$V_{CE} = -5V$ $I_C = -2mA$	h_{FE}	125 220 420	250 475 800	
Collector-Emitter saturation voltage		$I_C = -100mA$ $I_B = -5mA$	$V_{CE(sat)}$	-	-0.65	V
Base-Emitter saturation voltage		$I_C = -100mA$ $I_B = -5mA$	$V_{BE(sat)}$	-	-1.1	V
Transition frequency		$V_{CE} = -5V$ $I_C = -10mA$ $f = 100MHz$	f_T	100	-	MHz

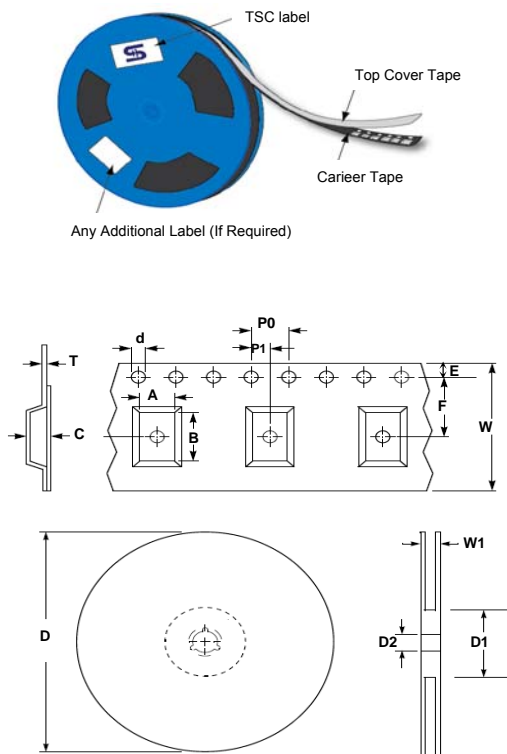Tape & Reel specification


Item	Symbol	Dimension(mm)
Carrier width	A	3.15 ± 0.10
Carrier length	B	2.77 ± 0.10
Carrier depth	C	1.22 ± 0.10
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178 ± 1
Reel inner diameter	D1	55 Min
Feed hole width	D2	13.0 ± 0.20
Sprocket hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.05
Sprocket hole pitch	P0	4.00 ± 0.10
Embossment center	P1	2.00 ± 0.05
Overall tape thickness	T	0.229 ± 0.013
Tape width	W	8.10 ± 0.20
Reel width	W1	12.30 ± 0.20

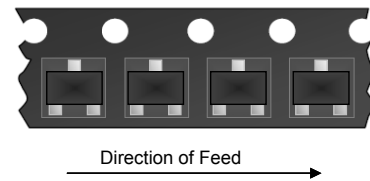

Small Signal Transistor

Rating and Characteristic Curves

Figure 1. Static Characteristic

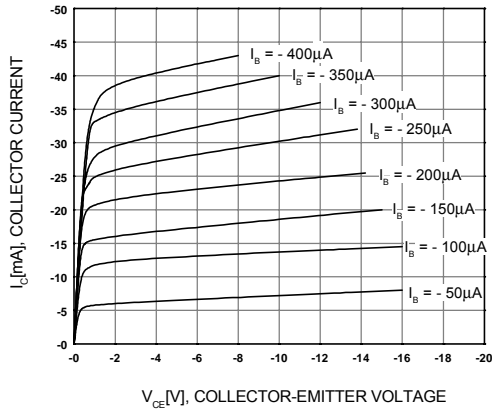


Figure 2. DC Current Gain

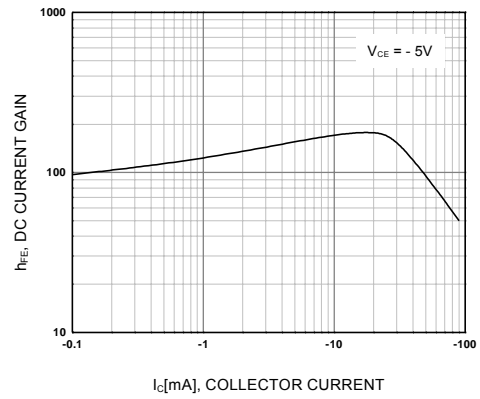


Figure 3. Base-Emitter Saturation Voltage
Collector-Emitter Saturation

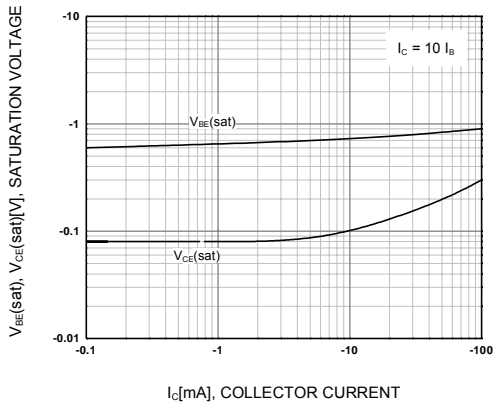


Figure 4. Base-Emitter On Voltage

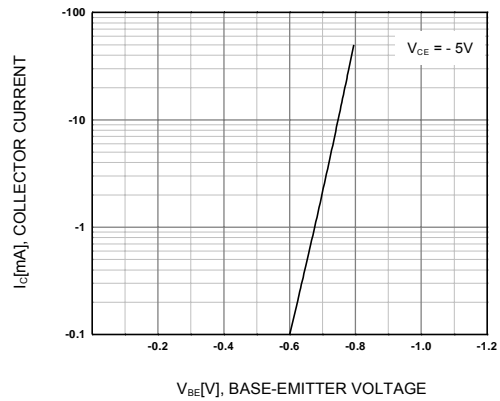


Figure 5. Collector Output Capacitance


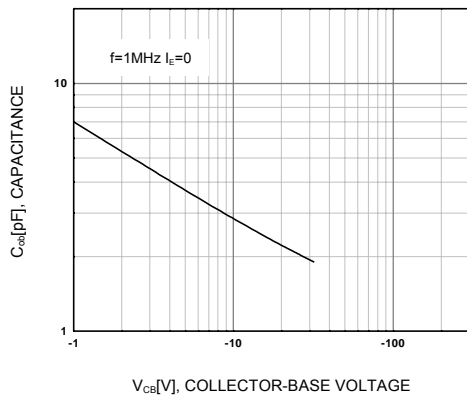


Figure 6. Current Gain Bandwidth Product

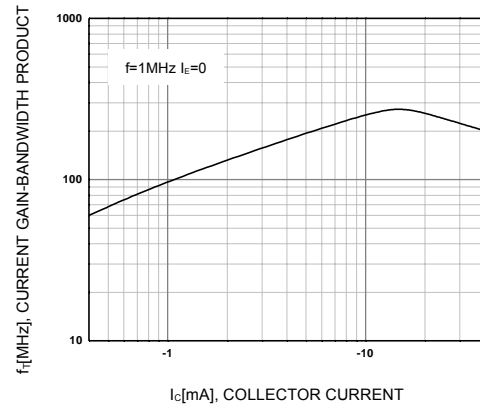

Small Signal Transistor

Rating and Characteristic Curves

Figure 7. DC current gain as a function of collector current; typical values


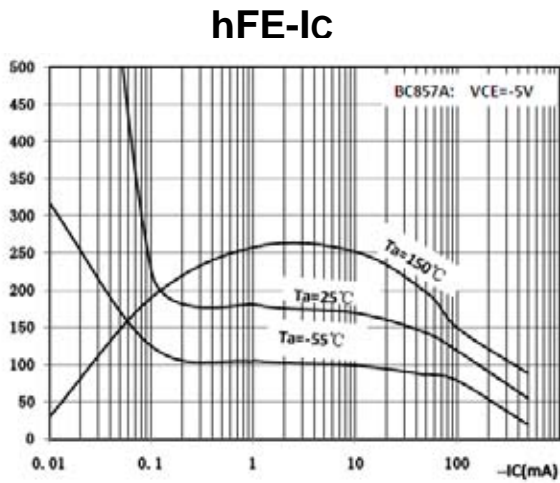


Figure 8. Base-emitter voltage as a function of collector current; typical values

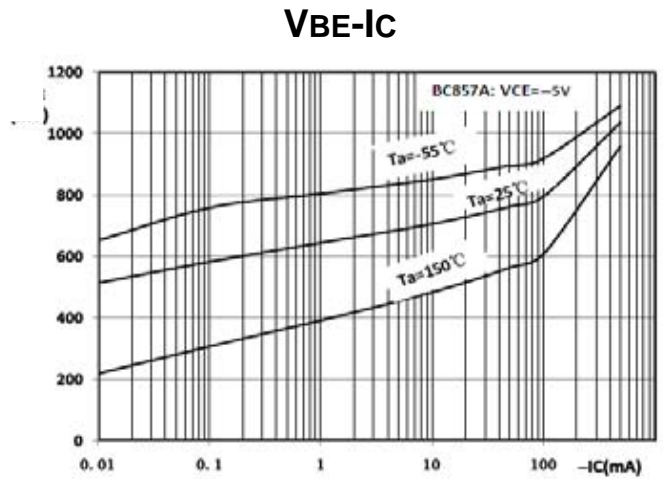

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Taiwan Semiconductor manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)