

ER34615M: D Size Spiral Cell

Technical Datasheet



Technical Specifications	
Part No.	ER34615M (UHR-ER34615)
Cell Type	Primary, non-rechargeable
Chemistry	Lithium Thionyl Chloride
Voltage Range	2.0 to 3.7V
Nominal Voltage	3.6V
Nominal Capacity	14.5Ah @ 10mA to 2.0V @ 20°C
Max. Continuous Discharge Current	2000mA continuous
Max. Pulse Discharge Current	Up to 3000mA (life and temperature dependent)
Weight	107g
Operating Temperature	-55°C to 70°C 70°C to 85°C (max of 24 hours)
Storage Temperature ¹	-55°C to 70°C 70°C to 85°C (max of 24 hours)
Exterior/Housing	Stainless steel container
Terminals/Connector	Radial tabs / radial pins / axial leads / flying leads
Safety	AL-MSDS/RD-002 Material Safety Datasheet - MSDS041 Safety Guide UBM-5112
Transportation ²	Class 9 - A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.
Quality Assurance	Ultralife manufacturing facilities are ISO 9001:2008 and ISO 14001:2004 registered. Its products are listed under the Component Recognition Program of Underwriters Laboratories (UL) and have passed UN transportation testing, which is required for international transportation of all lithium batteries.
Notes	<ol style="list-style-type: none"> Cells should be stored in temperatures less than 30°C for a shelf-life of greater than five years. A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.


Features

- High and flat operating voltage
 - High power and higher energy for the whole battery life
- High drain capability
 - Higher power applications
- Low self-discharge rate (<1% per year at 20°C)
 - Battery life higher than 10 years, depending on the application
- Hermetic glass-to-metal sealing
 - Avoid leakage, key for higher than 10 year battery life
- Non-flammable electrolyte
 - Safer operation in case of abuse
- PTC device
 - Safe operation in the event of a short circuit


Typical Applications

- Military and other radio applications
- Smart meters
- Alarm and security systems
- Beacons and emergency location transmitters
- GPS
- LED lighting applications


Dimensions

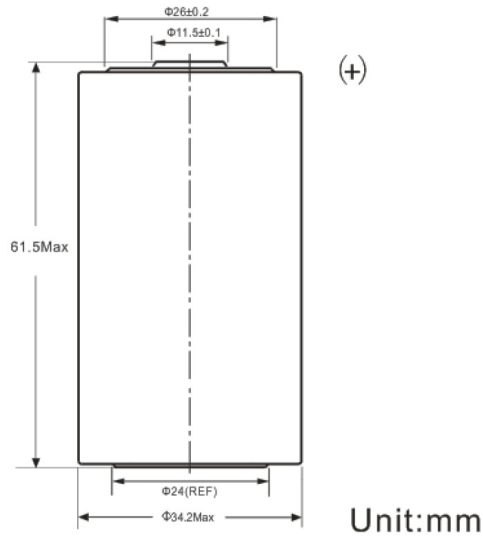

Typical Performance Graphs

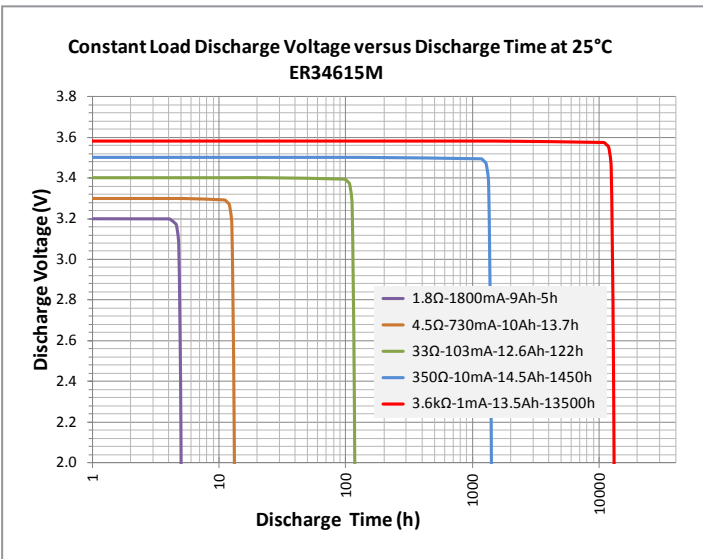

High and flat voltage at high and low drain

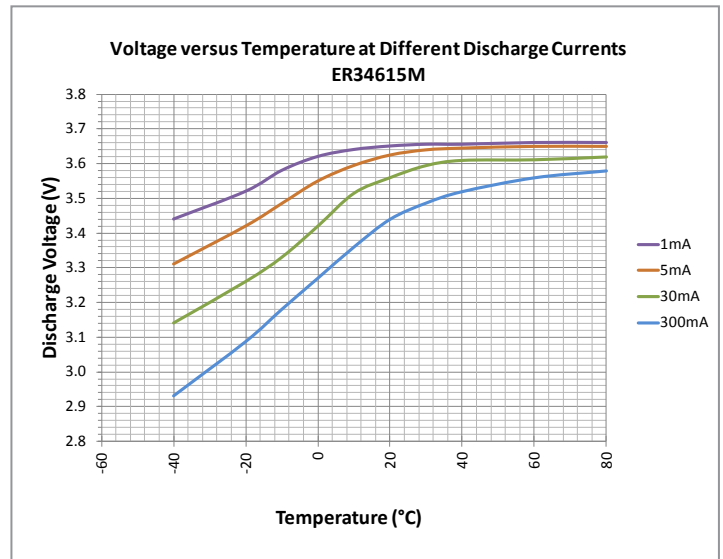

High voltage at high drain even at -30°C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Battery Packs](#) category:

Click to view products by [Ultralife](#) manufacturer:

Other Similar products are found below :

[2280309-1](#) [R101-B](#) [4114 210 501](#) [4120 210 501](#) [4600 726 406](#) [4610 726 406](#) [312G-U1](#) [55615703012](#) [3LR12](#) [4103 210 392](#) [4103 210 394](#)
[4106 210 392](#) [4106 210 394](#) [4223 210 501](#) [4606 726 406](#) [4607 726 406](#) [ZA13](#) [LR03/AAA/MN2400\(K4\)](#) [LR03 MAXELL S4](#) [LR1130](#)
[MAXELL B10](#) [LR14-MN1400-C K2](#) [LR1/910A](#) [LR41 MAXELL B10](#) [LR43](#) [LR43 MAXELL B10](#) [LR6 MAXELL S4](#) [11012](#) [E23A](#) [E90](#)
[625302](#) [625304](#) [637871](#) [638006](#) [6LF22/9V/MN1604\(K1\)C&B](#) [6LF22/9V/MN1604 PLUS](#) [6LR61](#) [SR626SW MAXELL](#) [SR920SW](#)
[MAXELL](#) [7K67 J](#) [55615303059](#) [GP14A S2](#) [GP15E](#) [GP1604GLF-2UE1](#) [GP 1604 ULTRA PLUS](#) [23733](#) [10 ET](#) [675 ET](#) [11A B5](#) [A544](#) [A76-](#)
[U10](#)