



比亚迪股份有限公司
BYD COMPANY LIMITED

SEALED METAL HYDRIDE
RECHARGEABLE CELLS & BATTERIES
APPROVAL SHEET

TO : _____

BYD MODEL NO : H-SC2800P

CUSTOMER APPROVED P/N : _____

DATE OF SUBMISSION : 20-Apr-10

ATTACHMENT : SPECIFICATION

TOTAL NO. OF PAGES : 5

SPECIFICATION NO : S-HSC2800P01

VERSION NO : 1.0

Drawn	CUI-MIAO	
Approved	Customer Dept. I	GUOQINGLI
	Technology Dept. I	ZHENGYI-HUANG
	Quality Control Dept. I	SHIHONG-SHAO

(with company chop)
Please sign and return one copy to us

BYD COMPANY LIMITED

ADD:BYD Scien-Tech Industrial Center Yan'an Road
Kuichong, Longgang, Shenzhen China P.C.: 518119
TEL: 86-755-89888888 FAX: 86-755-84202222
E-Mail:byd@byd.com
<http://www.byd.com.cn>

-Confidential. Please keep integrated.-
The content of this document is the property of BYD Company Limited. It is to be treated strictly confidential and is not to be disclosed, reproduced, or used in whole or in part without written consent.

1. APPLICATION

This specification applies to the Ni-MH batteries.

Model : H-SC2800P

2. CELL AND TYPE

2.1 Cell : Sealed Ni-MH Cylindrical Cell.

2.2 Type : H-SC2800P

2.3 Size type: SC

2.4 IEC type: HR23/43

3. RATINGS

3.1 Nominal voltage : 1.2 V

3.2 Nominal capacity : 2800 mAh/0.2CmA (Note 1)

3.3 Typical weight : 53.5 g (unit cell)

3.4 Standard charge : 280 mA×15hours

3.5 Rapid charge : 2800mA×1.2hours(Max.)
(with-ΔV, Time, Temperature control system)

Trickle current : 84~140 mA

3.6 Discharge cut-off voltage 1 V

3.7 Temperature range for operation (Humidity: Max. 85%)

Standard charge 0 ~ +45°C

Rapid charge +10 ~ +40°C

Trickle charge 0 ~ +45°C

Discharge -5 ~ +65°C

3.8 Temperature range for storage (Humidity: Max. 85%)

Within 1 years (Note 2) -20 ~ +25°C

Within 6 months -20 ~ +35°C

Within a months -20 ~ +45°C

Within a week -20 ~ +55°C

Note 1: Rated capacity figures are based on single cell performance.

Note 2: We recommend cells or batteries are charged at least once every 6 months.

4. ASSEMBLY & DIMENSIONS

Per attached drawing.

5. PERFORMANCE**5.1 TEST CONDITIONS**

The test is carried out with new batteries.

(within a month after delivery)

ambient conditions

Temperature : +20±5°C Humidity : 65±20%

Standard charge : 280mA(0.1C)×15hrs

Standard discharge : 0.2C to 1.0V

-Confidential. Please keep integrated.-

The content of this document is the property of BYD Company Limited. It is to be treated strictly confidential and is not to be disclosed, reproduced, or used in whole or in part without written consent.

5.2 TEST METHOD & PERFORMANCE

Test	Unit	Specification	Conditions	Remarks	
Capacity	mAh	Typical	2800	Standard charge/discharge	up to 3 cycles are allowed
		Minimum	2600		
Open Circuit Voltage(OCV)	Voltage (V)	≥1.25	After 1 hour standard charge		
Internal impedance	mΩ/cell	≤12	Upon fully charge (1KHz)		
High rate discharge(1C)	minute	≥48(2240mAh)	Standard charge before discharge	End Voltage is 1.0V/Cell	
Discharge current (C)	A	≤8.4(3C)	Maximum continuous discharge current		
Overcharge		no leakage nor explosion	280 mA(0.1C) charge for 28 days		
Charge Retention	mAh	≥1820	standard charge; storage: 28 days Standard discharge		
Cycle Life	cycle	≥500	IEC61951-2	see note 3	
Leakage		no leakage nor deformation	Fully charge at 2800 mA(1C), then storage 14 days		

Note 3 IEC61951-2 cycle life

Cycle number	Charge	Rest	Discharge
1	0.1CmA for 16h	none	0.25CmA for 2.33h
2~48	0.25CmA for 3.17h	none	0.25CmA for 2.33h
49	0.25CmA for 3.17h	none	0.25CmA to 1.0V/cell
50	0.1CmA for 16h	1~4h	0.20CmA to 1.0V/cell

50-cycle test as per above table is repeated . The discharge time of the 100th, 200th, 300th, 400th, 500th should be more than 3 hours respectively. (Ambient temperature is 20±5)°C

5.3 Humidity

The cells shall not leak during the 14 days when it is submitted to the condition of a temperature of 33±3°C and a relative humidity of 80±5% (salting is allowed).

-Confidential. Please keep integrated.-

The content of this document is the property of BYD Company Limited. It is to be treated strictly confidential and is not to be disclosed, reproduced, or used in whole or in part without written consent.

5.4 Vibration

Cells shall be mechanically and electrically normal after vibration which has an amplitude of 4mm(0.1575 inches) a frequency of 1000 cycles per minute, which should be continued in any directions during 60 minutes

5.5 Shock

Cells shall be mechanically and electrically normal after being subjected to a drop from a height of 450mm (17.716inches) onto an oak board in a voluntary axis respectively 3 times.

5.6 Short

Cells shall not explode after 1 hour short-circuit test.

5.7 Incorrect polarity charging

Cells shall not explode after 5 hour of incorrect polarity charging at 1 CmA.

6. PRECAUTION

6.1 We recommend you to set the cut-off voltage at 1.0V/cell.

6.2 If it is below 1.0V/cell, cells may have over-discharged or reverse charged.

6.3 Do not detect $-\Delta V$ for first 5 minutes of charging.

6.4 The cells shall be delivered in charged condition, Before testing or using, the cells shall be correctly charged in accordance with this specifications.

7. WARNING

7.1 Avoid direct soldering onto cells.

7.2 Observe correct polarity when connecting.

7.3 Do not charge with more than our specified current.

7.4 Use only within the specified working temperature range.

8. DANGER!

8.1 Avoid throwing cells into a fire or attempting to disassemble them. As the electrolyte inside is strong alkaline and can damage skin and clothes.

8.2 Avoid short circuiting. It may be leakage.

8.3 Not to be used in sealed conditions for Ni-MH cells.

9. HSF (Hazardous Substance Free)




9.1 The product can meet the HSF requirement.

-Confidential. Please keep integrated.-

The content of this document is the property of BYD Company Limited. It is to be treated strictly confidential and is not to be disclosed, reproduced, or used in whole or in part without written consent.


PART NO.:H-SC2800P

SAMPLE NO.:

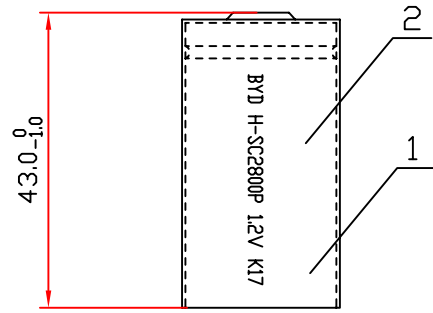

DATE CODE:

K 17
Year(2010) Week(17)



比亚迪股份有限公司
BYD COMPANY LIMITED

DRAWN	CUI-MIAO	DATE	2010/04/20
CHECKD	CUDQING-LI	DATE	2010/04/20
APPROVED	JIANGUO-TANG	DATE	2010/04/20
SCALE	/	UNIT	MM

NO.	NAME	SIZE	QTY	NOTE	SAP NO
2	PAPER TUBE	SC	1		429900
1	CELL	SC	1	NI-MH	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Battery Packs](#) category:

Click to view products by [BYD](#) manufacturer:

Other Similar products are found below :

[2280309-1](#) [R101-B](#) [4114 210 501](#) [4120 210 501](#) [4600 726 406](#) [4610 726 406](#) [312G-U1](#) [55615703012](#) [3LR12](#) [4103 210 392](#) [4103 210 394](#)
[4106 210 392](#) [4106 210 394](#) [4223 210 501](#) [4606 726 406](#) [4607 726 406](#) [ZA13](#) [LR03/AAA/MN2400\(K4\)](#) [LR03 MAXELL S4](#) [LR1130](#)
[MAXELL B10](#) [LR14-MN1400-C K2](#) [LR1/910A](#) [LR41 MAXELL B10](#) [LR43](#) [LR43 MAXELL B10](#) [LR6 MAXELL S4](#) [11012](#) [E23A](#) [E90](#)
[625302](#) [625304](#) [637871](#) [638006](#) [6LF22/9V/MN1604\(K1\)C&B](#) [6LF22/9V/MN1604 PLUS](#) [6LR61](#) [SR626SW MAXELL](#) [SR920SW](#)
[MAXELL](#) [7K67 J](#) [55615303059](#) [GP14A S2](#) [GP15E](#) [GP1604GLF-2UE1](#) [GP 1604 ULTRA PLUS](#) [23733](#) [10 ET](#) [675 ET](#) [11A B5](#) [A544](#) [A76-](#)
[U10](#)