

PIEZO BUZZER

Customer	
Customer P/O	
BeStar Model Name	BPT-14
Product No.	030300
Issue No.	BS/TEP01.010A
Issue Date	2001/10/16

Approval:

1. Characteristic
2. Dimension
3. Environmental Test
4. Appearance
5. Packing



BESTAR ELECTRONICS INDUSTRY CO.,LTD
TianAn Industry Park4/F,Site B ChangZhou New District
Tel:86-519-5103228
Fax:86-519-5131010
Http:www.be-star.com
E-Mail:bestarco@pub.cz.jsinfo.net

BPT-14


1. Characteristic

Electrical and Mechanical Characteristics

No.	Item	Specification
1.	Rated Voltage, Square Wave	5Vp-p
2.	Operating Voltage	1...20Vp-p
3.	a) Rated Current	max 2mA
4.	Capacitance 120Hz	15000± 30%pF
5.	a) Sound Output at 4KHz, 10cm	min 80dB
6.	Resonant Frequency	4000± 500Hz
7.	Operating Temperature	-20...+70° C
8.	Storage Temperature	-30...+80° C
9.	Weight	1g

a) Value applying at rated voltage.

★ Standard Output Measurement Setup

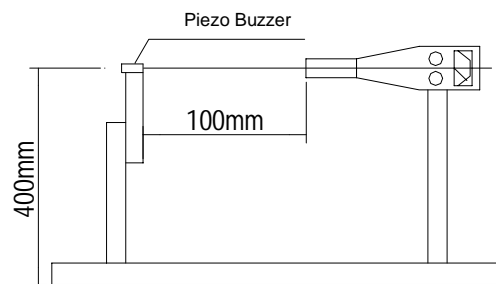

This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content 030300


DIS.		DATE		Page:1 of 4	BPT-14
CHEC.		DATE		3rd angle projection	Piezo Buzzer
APPR.		DATE			
 BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F, Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TEP01.010A

BPT-14


2. Dimension

Tolerance: ± 0.2

Unit:mm

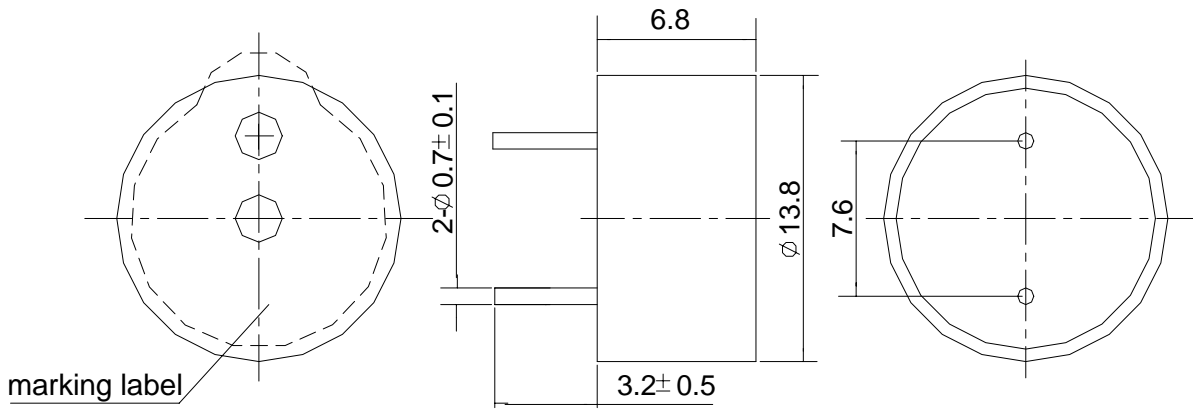

Frequency Response

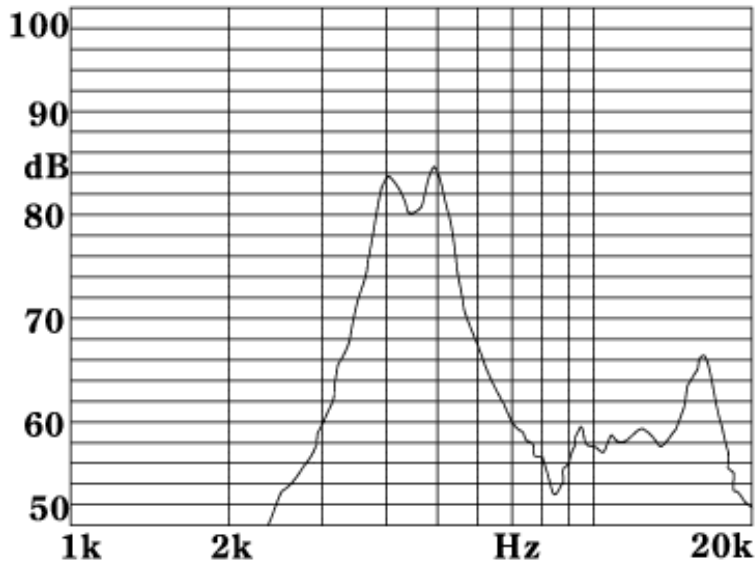

This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content 030300

DIS.		DATE		Page:2 of 4 3rd angle projection	BPT-14
CHEC.		DATE			Piezo Buzzer
APPR.		DATE			DRG NO BS/TEP01.010A
BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					

BPT-14

3. Environmental test

3.1 high temperature test

Temperature +70° C
Duration 96hrs

3.2 low temperature test


Temperature -20° C
Duration 96hrs

3.3 life test in normal temperature

Power supply rated voltage
Duration 1000hrs


3.4 temperature cycle test

Cycles 5



3.5 Humidity cycle test

Cycles 5



all these tests above should be measured after leaving normal temperature for 2hrs.

3.6 Drop test

Height 70cm
(to 10mm thickness woodenboard)
Direction 3

3.7 Solderability

Temperature 250± 5° C
Duration 3± 0.5sec

3.8 Solder Heat Resistance

Temperature 250± 10° C
Duration 30sec

Notice: All specification must be satisfied in this condition.

This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content 0303000

DIS.		DATE		Page:3 of 4	BPT-14
CHEC.		DATE			
APPR.		DATE		3rd angle projection	Piezo Buzzer
 BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TEP01.010A



This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content 030300

BPT-14

4. Appearance

Appearance : without any obstacle to normal operation : damages, cracks, rusts and distortions,ect.

5. Packing

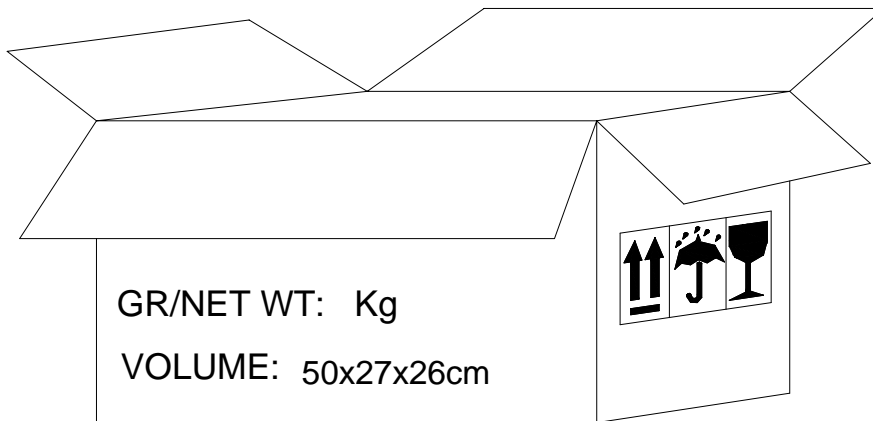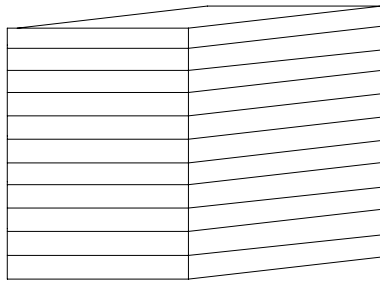

- 1)100pcs/tray
- 2)30tray/carton
- 3)3000 pcs/carton in total
- 4)carton size 50x27x26cm

DIS.		DATE		Page:4 of 4	BPT-14
CHEC.		DATE		3rd angle projection	Piezo Buzzer
APPR.		DATE			
 BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com				DRG NO BS/TEP01.010A	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Speakers & Transducers](#) category:

Click to view products by [Bestar](#) manufacturer:

Other Similar products are found below :

[AS02016MR-2-R](#) [PB-1220PE](#) [PB-2015PQ](#) [900-00001](#) [SMT-2240-TW-2-R](#) [SWFK-31736-000](#) [PT-2065FW](#) [PT-4175W](#) [AT-2830-TW-LW35-R](#) [ED-30761-000](#) [ED-31305-163](#) [CI-30120-A42](#) [TWFK-23991-000](#) [PB-0927PQ](#) [BF-7083-000](#) [AB6505B](#) [AS01708MR-SC-2-R](#) [AT-5030-TF-2-LW100-R](#) [AST-03008MR-R](#) [AS04008PS-4W-R](#) [AS01308MR-2-R](#) [AS01808AO-WP-R](#) [AS01508MR-6-R](#) [AS07108PO-R](#) [AS07708PS-2-WR-R](#) [AS07104PO-R](#) [SMS2020-08H4.5 LF](#) [BDT1717-08H6.5W56MLF](#) [SMS-2008MS-R](#) [AS04008PS-4W-WR-R](#) [AS06608PS-WR-R](#) [BLS50-1-08H18.2B-03 LF](#) [AS03008MR-R](#) [AS04008CO-2-R](#) [AS04008PR-WR-R](#) [ASE03008MR-LW150-R](#) [AS01808MR-LW152-R](#) [AS01808MR-R](#) [AS03608MR-4-R](#) [AS06608PS-R](#) [AS07708PS-2-R](#) [AS07108PO-3-R](#) [ASE06008MR-LW150-R](#) [ASE02008MR-LW150-R](#) [AST-1732MR-R](#) [SMS-1508MS-2-R](#) [AS05708MR-R](#) [AS07004PO-WR-R](#) [AS05008MR-R](#) [APS3008S-R](#)