# 3M<sup>™</sup> CF Card Header

CompactFlash™ Type II, Long Guides, Surface Mount

7E50 Series



- Headers mate with both CompactFlash™ Type I and Type II cards
- Polarization options for top or bottom boardmount
- Extended guide rails enable accurate and easy card insertion
- Single row surface mount solder tails facilitate auto placement and IR soldering
- Optional 2 mm board standoff enables board population
- Meets CFA standards for known compatibility and reliability
- Metal brace provides stability for ejector attachment
- Multiple styles of ejector available
- Optional ejector can be purchased pre-assembled or separately
- Optional Tape and Reel or Tray packaging for automated assembly
- See the Regulatory Information Appendix (RIA) in the "RoHS compliance" section of www.3Mconnector.com for compliance information (RIA E1 & C1 apply)

Date Modified: August 16, 2010

TS-2083-G Sheet 1 of 5

## **Physical**

#### **Insulation:**

Material: High Temperature Thermoplastic

Flammability: UL 94V-0

Color: Beige

Contact:

Material: Copper Alloy

**Plating:** 

Underplating: 2.03 µm [ 80 µ" ] Nickel

Wiping Area:  $0.38 \mu m [15 \mu]$  or  $0.76 \mu m [30 \mu]$  Gold Solder Tails:  $3.81 \mu m [150 \mu]$  Matte Tin or Gold Flash

Marking: 3M Logo

### **Electrical**

**Current Rating:** 0.5 A

**Insulation Resistance:**  $10^3\Omega$  at  $500 V_{DC}$ **Withstanding Voltage:**  $500 V_{AC}$  for 1 minute


## **Environmental**

**Temperature Rating:** -40°C to +85°C


**Process Rating:** Maximum 260 C (per J-STD-020C)

Moisture Sensitivity Level: 1 (per J-STD-020C)


CompactFlash is a registered trademark of Sandisk Corporation.

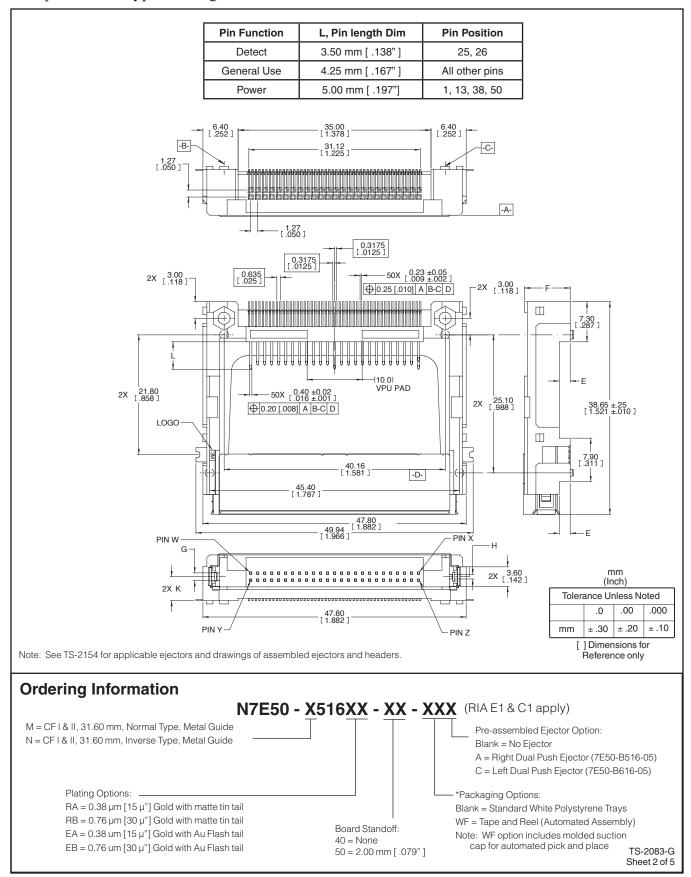

Part Number	E mm [ inch ]	F mm [ inch ]	G mm [ inch ]	H mm [ inch ]	K mm [inch]	Pin W	Pin X	Pin Y	Pin Z
N7E50-M516XX-40	0.00	6.30 [ .248 ]	1.40 [ 0.55 ]	0.80 [ .031 ]	2.35 [ .093 ]	Pin 1	Pin 25	Pin 26	Pin 50
N7E50-M516XX-50	2.00 [ .079 ]	8.30 [ .328 ]	1.40 [ .055 ]	0.80 [ .031 ]	4.35 [ .171 ]	Pin 1	Pin 25	Pin 26	Pin 50
N7E50-N516XX-40	0.00	6.30 [ .248 ]	0.80 [ .031 ]	1.40 [ .055 ]	3.95 [ .156 ]	Pin 50	Pin 26	Pin 25	Pin 1
N7E50-N516XX-50	2.00 [ .079 ]	8.30 [ .328 ]	0.80 [ .031 ]	1.40 [ .055 ]	5.95 [ .234 ]	Pin 50	Pin 26	Pin 25	Pin 1
N7E50-H516XX-50	2.00 [ .079 ]	7.90 [ .311 ]	1.40 [ .055 ]	0.80 [ .031 ]	4.15 [ .163 ]	Pin 1	Pin 25	Pin 26	Pin 50

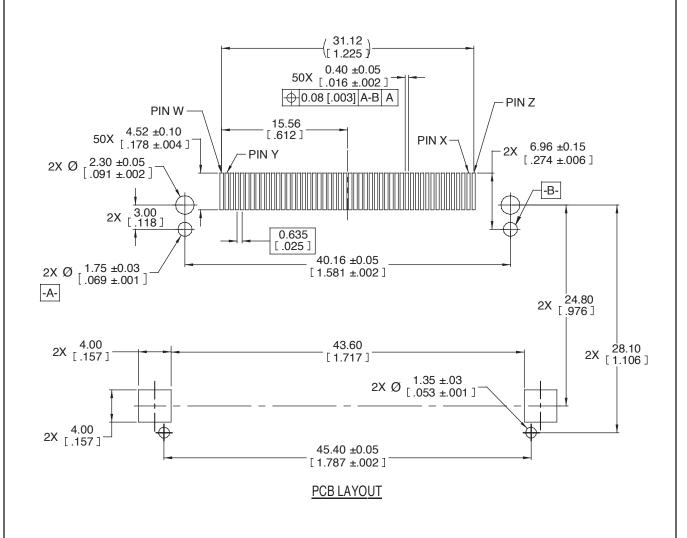


TS-2083-G Sheet 3 of 5

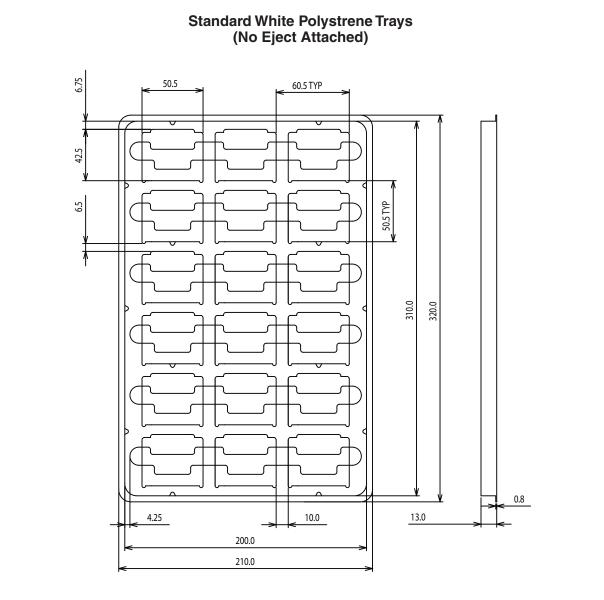

#### Standard tray notes:

- 1. Material: PS
- 2. Packaging quantity:
  - 1 Tray: 18 pcs
  - 1 Carton box: 15 trays per carton (270 pcs total)
- 3. Carton size: 340 mm (L) by 230 mm (W) by 255 mm (H)
- 4. Standard tray packaging is not suitable for suction-type pick-and-place Operations. Pick-and-place capable tray packaging is available on request.
  - Contact 3M technical service.
- 5. For product with pre-assembled ejectors contact 3M technical service for dimensioned drawings.

TS-2083-G Sheet 4 of 5

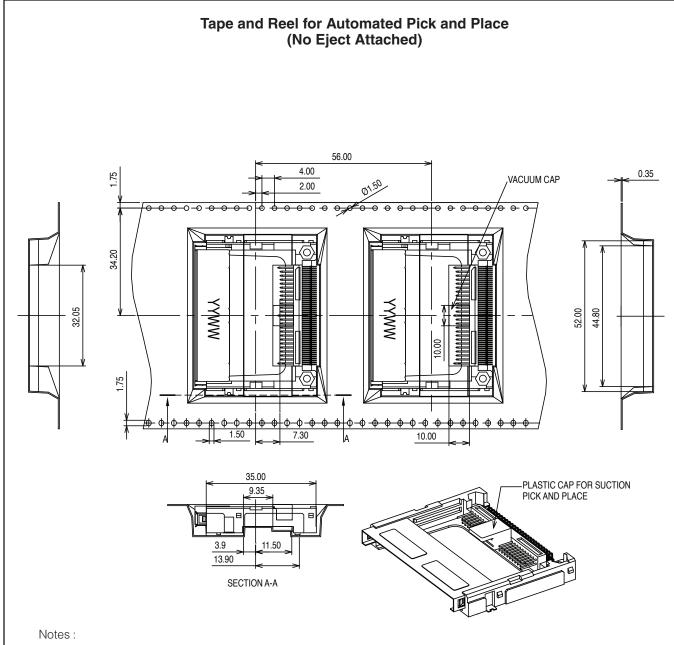

- 1. Material: PS
- 2. Packaging quantity
  - 1 Reel: 100 pcs
  - 1 Carton: 4 reels per carton (400 pcs total)
- 3. Carton size: 725 mm (L) by 375 mm (W) by 320 mm (H)
- 4. For tape and reel packaging with removable vacuum cap for suction pick and place operations
- 5. For product with attached ejectors contact 3M technical service for dimensioned drawings.

TS-2083-G Sheet 5 of 5

# **Important Notice** All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M. Warranty; Limited Remedy; Limited Liability. This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. 3M MAKES NO OTHER WARRANTIES

INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of

3M is a trademark of 3M Company.

the legal theory asserted.

6801 River Place Blvd. Austin, TX 78726-9000

www.3Mconnector.com

U.S.A. 1-800-225-5373

**3M Electronics Solutions Division** 

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Memory Card Connectors category:

Click to view products by 3M manufacturer:

Other Similar products are found below:

M10-597810-355 M21-033321-005 6426-201-21343 69.920.0553.0 MCR60A-98D-2.54DSA(70) FCN-568P068-G/07-4V 809180410000000 95622-003LF AD2-262F-38900-232 DM3AT-SF-PEJM5(41) EN2997S72039F6 N7E50-7516PG-20-WF IC11S-BUR-PNEJL(71) NX30TA-15PAA(50) 21920-5 2041353-2 FUA006-3220-0 33CFAE-DN MI21A-50PD-SF-EJR(91) 502431-1011 5175651-2 10-247926-166 EN2997S02039B8 EN2997S61212BN EN2997S72039B6 EN2997SE02039B8 EN2997SE61212BN EN2997SE72039B6 71-252718-32P NX1-32T-KT3K(05) 95622-003LF 91-570124-15P 192900-0488 DM1AA-SF-PEJ 95079-00CALF 84648-056HLF 68-580163-21S 33DVIR-29S12R SF58S006VBBR2000 93-570123-08P GMC020080HR 125A-78C00 1010040575# MI20A-50PD-SF-EJL(71) KP10S-SF-PEJ(812) DM1AA-SF-PEJ(31) FO-10GGBLCX20-002 504536-0691 115S-ACA2 115S-ACA3