



What can we help you find?




- [Products](#)
- [Industries](#)
- [Resources](#)
- [About TE](#)
- [My Account](#)
- [Innovation](#)
- [Support Center](#)

Home > [Products](#) > [Wire & Cable](#) > [Product Feature Selector](#) > Product Details

## 1437361-3 Product Details

Share | 
 Print | 
 Email

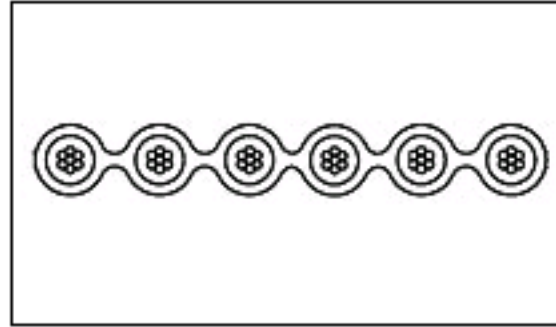

### Flat Ribbon Cable

Always EU RoHS/ELV Compliant (Statement of Compliance)

#### Product Highlights:

- 1.27 mm Centerline
- Wire Size - Details = 28 AWG(19/40) Stranded
- Number of Conductors = 10
- Ribbon Cable Outside Conductor Spacing = 11.43 mm
- Width = 12.70 mm

[View all Features](#)

#### Quick Links

- [▶ Pricing & Availability](#)
- [▶ Search for Tooling](#)
- [▶ Product Feature Selector](#)
- [▶ Contact Us About This Product](#)

**1437361-3**  
(185-10)

TE Internal Number: 1437361-3

Active

[Add to My Part List](#) | 
 Request Sample | 
 Find Similar Products | 
 Buy Product

### Documentation & Additional Information

#### Product Drawings:

- [HIGH FLEX LIFE FLAT CABLE 28 AWG STRANDED PVC INSU...](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- None Available

#### Application Specifications:

- None Available

#### Instruction Sheets:

- None Available

#### CAD Files:

- None Available

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

[List all Documents](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- Ribbon Cable Outside Conductor Spacing (mm [in]) = 11.43 [0.450]
- Color = Gray
- Series = Ansley 185

#### Electrical Characteristics:

- Voltage Rating (VAC) = 300
- Impedance (Ω) = 100
- Capacitance (pF/ft) = 14.0

#### Dimensions:

- Width (mm [in]) = 12.70 [0.500]
- Height (mm [in]) = 0.89 [0.035]

#### Body Features:

- Insulation Material = PVC

#### Housing Features:

- Centerline (mm [in]) = 1.27 [0.050]

#### Configuration Features:

- Number of Conductors = 10

#### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

#### Conditions for Usage:

- [Wire Size - Details](#) = 28 AWG(19/40) Stranded
- Temperature Range (°C) = -20 - +105

#### Packaging Features:

- Packaging Quantity = 30 Meters per Reel

#### Other:

- Brand = AMP

#### Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)

#### Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

#### Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

#### Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ribbon Cables / IDC Cables](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[FSK-12A Ribbon Cable, 6 Pin, 500mm](#) [AWG28-10G EHV3C EHV4C EHV5C](#) [cab-LVDV-PWR-10-15 FSP-25A Ribbon Cable, 4 Pin, 350mm](#)  
[Ribbon Cable, 6 Pin, 300mm](#) [cab-LVDV-DAT-34-15](#) [49635-C62-S2](#) [1-3636-600-5204](#) [92315-1408](#) [100063-0094](#) [100063-0106](#) [100063-0102](#)  
[100063-0104](#) [MMSD-02-20C-F-15.00-S-K](#) [100063-0099](#) [100063-0105](#) [100063-0095](#) [100063-0103](#) [100063-0093](#) [100063-0091](#) [2200000068](#)  
[100063-0092](#) [100063-0101](#) [100063-0100](#) [100063-0097](#) [TFSDT-08-28-H-15.00-S](#) [S1SD-02-30-GF-09.00-L](#) [MMSD-02-22C-F-15.00-S-K](#)  
[S1SS-02-28C-GF-02.00-L](#) [S1SDT-02-28-GF-03.00-L](#) [2-1589735-3](#) [JSM015PP2DCC23N](#) [92301-0283](#) [TCSD-22-D-26.00-01](#) [S1SST-07-30-](#)  
[GF-06.00-L](#) [T2SD-20-24-L-07.87-TR-NUS](#) [DS1057-01-44A282R-30.5](#) [FFSD-06-S-17.00-01-N](#) [IDSS-03-D-20.00-T](#) [TCMD-17-S-36.00-01-](#)  
[SR](#) [92301-0718](#) [839023](#) [490107670612S](#) [MMSDT-06-20-S-05.5-D-K-LDX](#) [IDD-04-G](#)