



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

BZV55C2V4

THRU

BZV55C47

TECHNICAL SPECIFICATIONS OF GLASS SILICON ZENER DIODES

FEATURES

- * Voltage Range: 2.4V to 47V
- * Double slug type construction

MECHANICAL DATA

- * Case: Glass sealed case
- * Lead: Solder plated, solderable per MIL-STD-705, Method 2026 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.05 gram


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Mini Melf(DL-35)

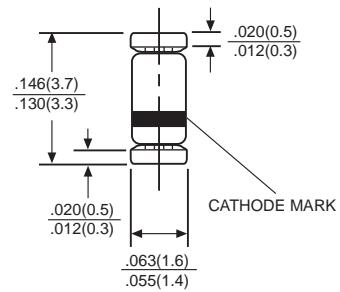

Dimensions in inches and (millimeters)

	SYMBOL	VALUE	UNITS
Zener Current see Table "Characteristics"			
Power Dissipation (Notes 1) at Tamb=25°C	Ptot	500	mW
Thermal Resistance - Junction to Ambient Air (Notes 2)	RthA	0.3	K/mW
Maximum Forward Voltage at IF=100mA	VF	1.0	Volts
Operating and Storage Temperature	TJ,Tstg	-55 to +150	°C

Notes: 1. Mounted on 5.0mm² (.013mm thick) land areas.

2. Leads are kept at specified ambient temperature at a distance of 8mm from case.

RATING AND CHARACTERISTIC CURVES (BZV55C SERIES)



TYPE	Nominal Zener Voltage $V_Z@I_{ZT}$		Zener Test Current I_{ZT}	Maximum Zener Impedance		I_{ZK}	Maximum Reverse Leakage Current		
				$Z_{ZT}@I_{ZT}$	$Z_{ZK}@I_{ZK}$		$I_R @ V_R$		
	Min	Max	mA	Ohms	Ohms		mA	μA	Volts
BZV55C2V4	2.28	2.56	5	85	600	1	50	1.0	
BZV55C2V7	2.5	2.9	5	85	600	1	10	1.0	
BZV55C3V0	2.8	3.2	5	85	600	1	4	1.0	
BZV55C3V3	3.1	3.5	5	85	600	1	2	1.0	
BZV55C3V6	3.4	3.8	5	85	600	1	2	1.0	
BZV55C3V9	3.7	4.1	5	85	600	1	2	1.0	
BZV55C4V3	4.0	4.6	5	75	600	1	1	1.0	
BZV55C4V7	4.4	5.0	5	60	600	1	0.5	1.0	
BZV55C5V1	4.8	5.4	5	35	550	1	0.1	1.0	
BZV55C5V6	5.2	6.0	5	25	450	1	0.1	1.0	
BZV55C6V2	5.8	6.6	5	10	200	1	0.1	2.0	
BZV55C6V8	6.4	7.2	5	8	150	1	0.1	3.0	
BZV55C7V5	7.0	7.9	5	7	50	1	0.1	5.0	
BZV55C8V2	7.7	8.7	5	7	50	1	0.1	6.0	
BZV55C9V1	8.5	9.6	5	10	50	1	0.1	7.0	
BZV55C10	9.4	10.6	5	15	70	1	0.1	7.5	
BZV55C11	10.4	11.6	5	20	70	1	0.1	8.5	
BZV55C12	11.4	12.7	5	20	90	1	0.1	9.0	
BZV55C13	12.4	14.1	5	26	110	1	0.1	10	
BZV55C15	13.8	15.6	5	30	110	1	0.1	11	
BZV55C16	15.3	17.1	5	40	170	1	0.1	12	
BZV55C18	16.8	19.1	5	50	170	1	0.1	14	
BZV55C20	18.8	21.2	5	55	220	1	0.1	15	
BZV55C22	20.8	23.3	5	55	220	1	0.1	17	
BZV55C24	22.8	25.6	5	80	220	1	0.1	18	
BZV55C27	25.1	28.9	5	80	220	1	0.1	20	
BZV55C30	28	32	5	80	220	1	0.1	22	
BZV55C33	31	35	5	80	220	1	0.1	24	
BZV55C36	34	38	5	80	220	1	0.1	27	
BZV55C39	37	41	2.5	90	500	1	0.1	30	
BZV55C43	40	46	2.5	90	600	1	0.1	33	
BZV55C47	44	50	2.5	110	700	1	0.1	36	

NOTE: Zener Voltage Tolerance $\pm 5\%$

Breakdown characteristics

BZV55-SERIES

changes in the power dissipation due to the ambient temperature.

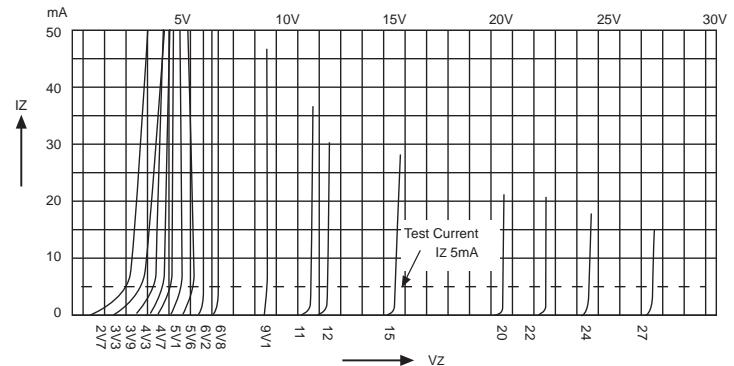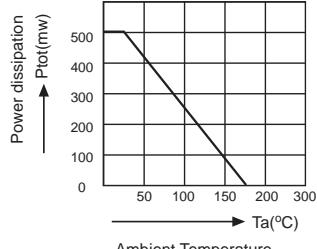

DC COMPONENTS CO., LTD.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Zener Diodes category:

Click to view products by DC Components manufacturer:

Other Similar products are found below :

[MMSZ5245BS-7-F](#) [RKZ13B2KG#P1](#) [RKZ5.6B2KJ#R1](#) [EDZTE6113B](#) [EDZTE6116B](#) [EDZTE616.8B](#) [1N747A](#) [1N966B](#) [NTE5116A](#)
[NTE5121A](#) [NTE5139A](#) [NTE5147A](#) [NTE5152A](#) [NTE5155A](#) [NTE5156A](#) [NTE5164A](#) [JANS1N4974US](#) [SMAJ4764A-TP](#) [RKZ5.1BKU#P6](#)
[3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#) [3SMBJ5920B-TP](#) [3SMBJ5925B-TP](#) [TDZTR24](#) [441774C](#) [MMSZ4678-TP](#) [MMSZ5232BQ-13-F](#)
[BZG04-36](#) [BZG05C9V1-HE3-TR](#) [HZN30NBTR-E](#) [UDZTE-175.1B](#) [3SMAJ5945B-TP](#) [3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#) [DL4746A-TP](#)
[RKZ18B2KK#R1](#) [RKZ10B2KL#R1](#) [RKZ6.8B2KL#R1](#) [RKZ8.2B2KL#R1](#) [DZ2S240M0L](#) [SMAZ27-TP](#) [SMBZ5920B-E3/52](#) [ZMM3.0](#)
[RD16UM-T1-A](#) [RD39S-T1-A](#) [RD9.1S-T1-A](#) [RD10S-T1-A](#) [RD20S-T1-A](#) [RD2.2S-T1-A](#) [RD2.7UM-T1-A](#)