

# HSK-MS-L cable gland

long thread



## HSK-MS-L

With long threaded connection

- Easy to assemble
- Completely water-tight
- Optimum strain relief
- Large clamping areas

## Material

Brass, nickel plated  
Clamp: Polyamide  
Moulded seal: NBR  
O-ring: NBR

## Technical data


Protection class: IP 68 - 10 bar / IP 69K

Temperature range: -40°C up to +100°C

Test standard: EN50262

## Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

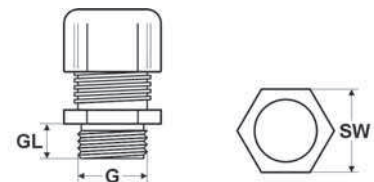

## Dimensions

G Thread size  
GL Thread length  
SW Spanner size

### metric thread

Part no.	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
91720	M12 x 1,5	3,0 - 6,5	10,0	14	50	o. r.	o. r.	o. r.
91721	M16 x 1,5	4,0 - 8,0	10,0	17 / 19	50	o. r.	o. r.	o. r.
94559	M20 x 1,5	10,0 - 14,0	10,0	24	50	o. r.	o. r.	o. r.
903527	M25 x 1,5	13,0 - 18,0	12,0	30	25	o. r.	o. r.	o. r.
93539	M32 x 1,5	18,0 - 25,0	12,0	40	25	o. r.	o. r.	o. r.
91725	M40 x 1,5	20,0 - 26,0	15,0	50	10	o. r.	o. r.	o. r.
91726	M50 x 1,5	25,0 - 31,0	15,0	57	5	o. r.	o. r.	o. r.
91727	M63 x 1,5	29,0 - 35,0	15,0	64 / 68	5	o. r.	o. r.	o. r.

### metric thread - with reducing seal

Part no.	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
91722	M20 x 1,5	5,0 - 9,0	10,0	22	50	o. r.	o. r.	o. r.
91723	M25 x 1,5	9,0 - 16,0	12,0	30	25	o. r.	o. r.	o. r.
91724	M32 x 1,5	13,0 - 20,0	12,0	40	25	o. r.	o. r.	o. r.

### PG thread

Part no.	Size PG	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
90310	7	3,0 - 6,5	10,0	14	50	o. r.	o. r.	o. r.
90311	9	4,0 - 8,0	10,0	17	50	o. r.	o. r.	o. r.
90312	11	5,0 - 10,0	10,0	20	50	o. r.	o. r.	o. r.
90313	13,5	6,0 - 12,0	10,0	22	50	o. r.	o. r.	o. r.
90314	16	10,0 - 14,0	10,0	24	50	o. r.	o. r.	o. r.
90315	21	13,0 - 18,0	12,0	30	25	o. r.	o. r.	o. r.
90316	29	18,0 - 25,0	12,0	40	25	o. r.	o. r.	o. r.
90317	36	22,0 - 32,0	15,0	50	10	o. r.	o. r.	o. r.
90318	42	32,0 - 38,0	15,0	57	5	o. r.	o. r.	o. r.
90319	48	37,0 - 44,0	15,0	64	5	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Glands, Strain Reliefs & Cord Grips](#) category:*

*Click to view products by [Helukabel](#) manufacturer:*

Other Similar products are found below :

[120-116-1-1-20BP](#) [120-116-1-1-32BE](#) [120-117-40](#) [120-123-14](#) [120-123-16](#) [120-125-16](#) [120-125-16R](#) [120-125-16Y](#) [120-125-24Y](#) [120-125-28](#) [120-125-28R](#) [120-125-32](#) [120-125-32R](#) [120-125-40](#) [120-125-56](#) [120-126-14](#) [120-126-16](#) [120-126-20](#) [120-126-20BL](#) [120-126-20R](#) [120-126-24](#) [120-126-28](#) [120-126-32](#) [120-126-40BL](#) [120-116-1-1-06BP-509](#) [120-116-1-1-06CP](#) [120-116-1-1-16BE](#) [120-116-1-1-28BP](#) [120-123-20](#) [120-123-24](#) [120-123-32](#) [120-125-20](#) [120-125-20Y](#) [120-125-24](#) [120-125-24R](#) [120-125-28Y](#) [120-126-14BL](#) [120-126-16R](#) [120-126-16Y](#) [120-126-24BL](#) [120-126-28BL](#) [120-126-32BL](#) [120-126-40](#) [120-126-48](#) [120-126-48BL](#) [1300980012](#) [1300980105](#) [DBZM-6828](#) [1498](#) [15190-103 R2](#)